





REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR 01/18	L.CHAN

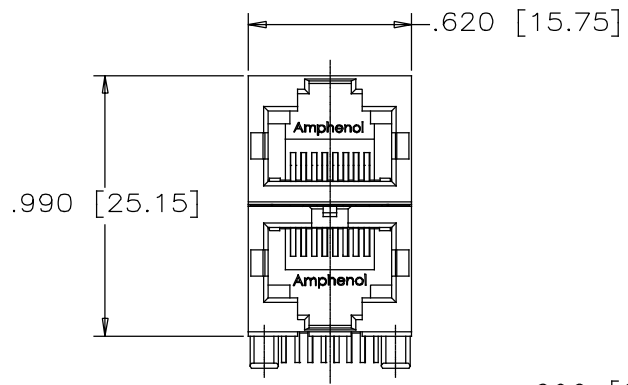


FRONT VIEW

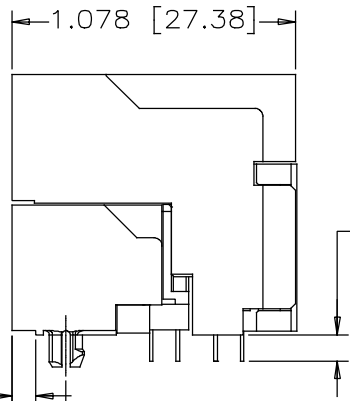

SIDE VIEW

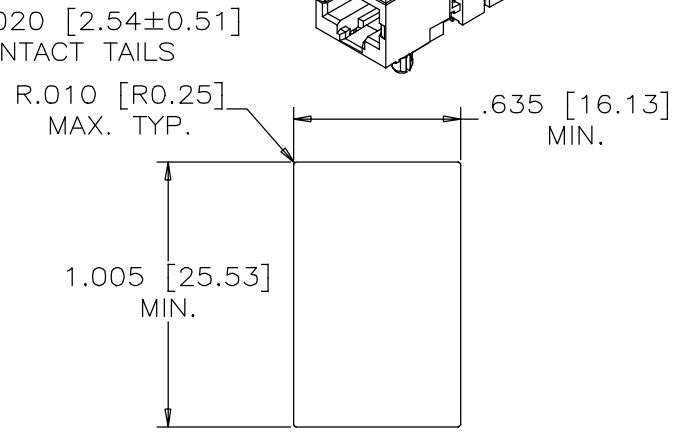

RECOMMENDED PANEL CUTOUT

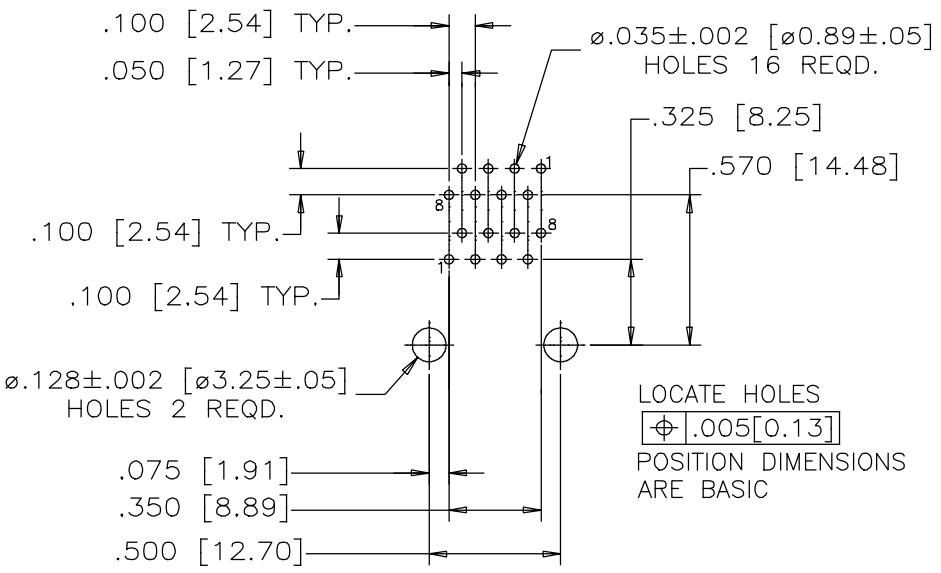

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE OF BOARD)

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC. BLACK.
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACE.
SEE PART NO. FOR THICKNESS.
50u" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100u" MIN. MATTE TIN OR GOLD FLASH
ON CONTACT AILS.

PART NUMBER: RJSAE-X080-02

- GOLD PLATING OPTION
- D = 6u" GOLD PLATING
 - G = 15u" GOLD PLATING
 - J = 30u" GOLD PLATING
 - 5 = 50u" GOLD PLATING



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	DATE	MAR 01/18	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED	AMY.Z	DATE	MAR 01/18	
SECONDARY MILLIMETER	M.E. APP'D				TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D				2X1 STACKABLE MODULAR JACK, 8 POSITION, 8 CONTACTS, 2-PIECE CONSTRUCTION, WITHOUT SHIELD, WITHOUT LED - RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.				DWG. NO.
1 DECIMAL PLACE	ENG. REL. NO.				P-RJSAE-X080-02
2 DECIMAL PLACES	REF.	EAR# RJ18044			REV
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION				A
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING				CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1