


# Steward

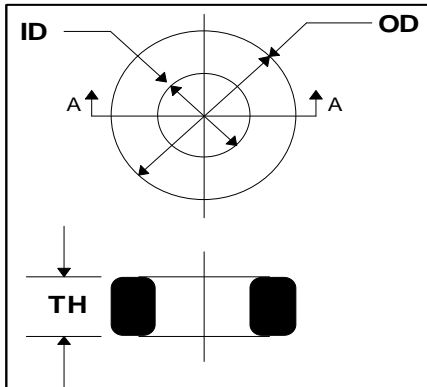

## CORE DIMENSIONS

UNCOATED CORE				35T0135-000	
	MM	INCHES		MM	INCHES
OD	3.43	(.135)	±	.13	(.005)
ID	1.78	(.070)	±	.13	(.005)
TH	1.27	(.050)	±	.13	(.005)
SINGLE PARYLENE COATING				35T0135-00P	
OD	3.45	(.136)	±	.13	(.005)
ID	1.75	(.069)	±	.13	(.005)
TH	1.30	(.051)	±	.13	(.005)

WEIGHT / K 0.09 LBS  
 INITIAL PERMEABILITY 5000

## ELECTRICAL SPECIFICATION

	MIN ( $\mu$ H)	NOM MIN TOL. (-20%)	NOM ( $\mu$ H)	MAX MAX TOL. (+20%)	FREQ. (kHz)	VOLT. (V)	TURNS
L	.667		.834	1.001	100	≤ .00022	1
Q	10		-	-	100	≤ .00022	1

## COATING SPECIFICATIONS

TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	.10

NOTES:



Rev	Description	Date	INT
A	Original Draft	10/25/1993	JAZ
B	UPDATED TO NEW FORMAT	6/9/1995	JBE
C	TRANSFER TO LOTUS NOTES	11/17/1997	IS
D	REACTIVATE PRINT REMOVE Q COATING SPECS CHANGE PART NUMBER	10/4/2005	JRK
E	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0135-00P-E	Rev:
Drawn By: WMM	Title # 35T0135-00P	E

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**