


# SANYO

## Cadnica

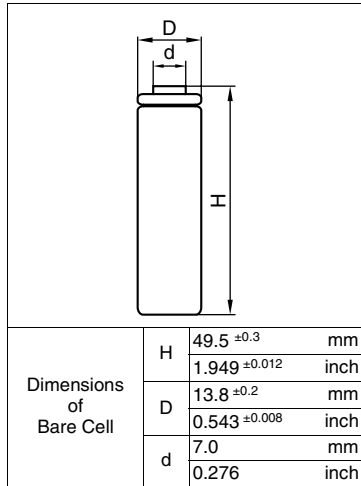


# Cell Type KR-1100AAU

## Specifications


Nominal Capacity		1100mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	110mA	
	Quick	220mA	
	Fast	1600mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	Storage	-20°C to +60°C [-4°F to 140°F]
		Storage	-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at 50% discharge)		19.0mΩ (at 1000Hz)	
Weight		24g/0.85oz	
Dimensions(D)×(H) (with tube)		14.3 <sup>0</sup> <sub>-0.5</sub> × 50.3 <sup>0</sup> <sub>-1</sub> mm	
		0.56 <sup>0</sup> <sub>-0.02</sub> × 1.98 <sup>0</sup> <sub>-0.04</sub> inch	

### Typical Characteristics


#### Charge

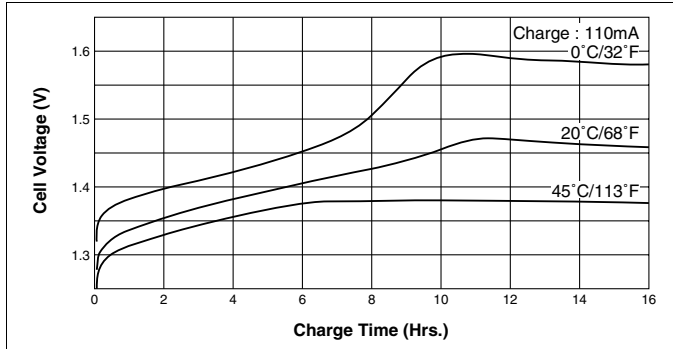


#### Discharge (at high rate)

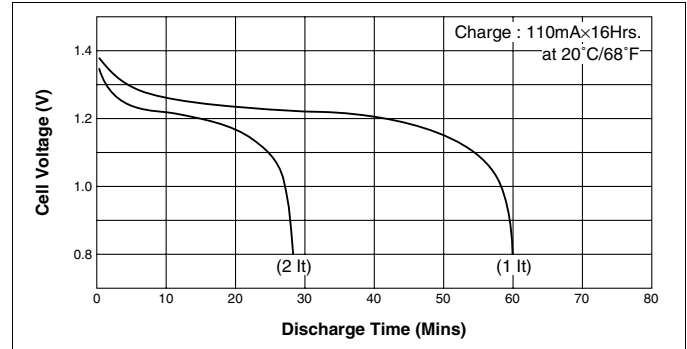


#### Charge

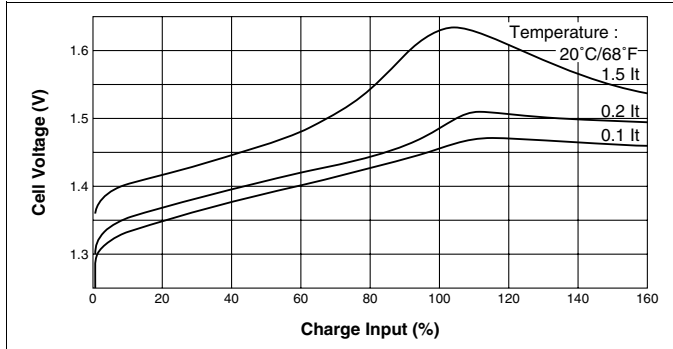

#### Discharge (at high rate)

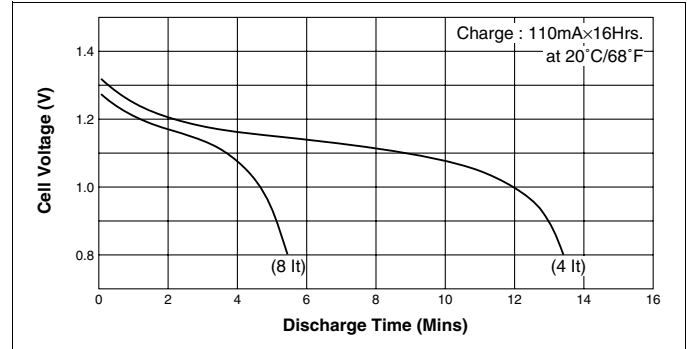

#### Discharge (at low rate)

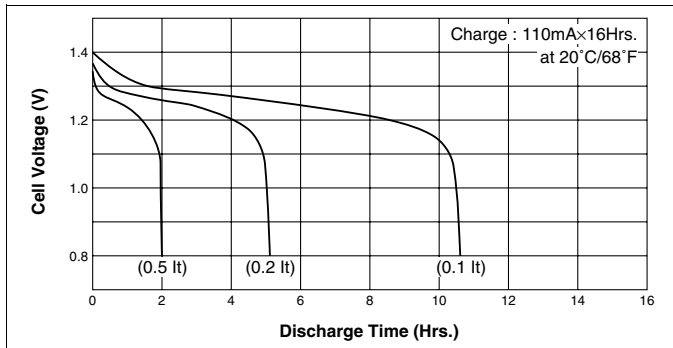

#### Temperature (Charge & Discharge)

