
т	۵	н п	т	0





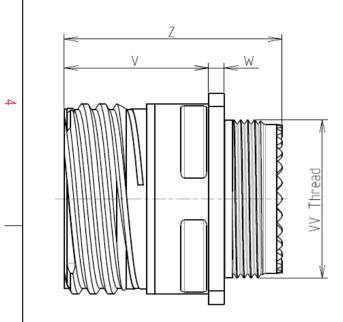

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.89 g ± 10%

8D 0

G

11

Ζ


04

В

F

Е

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

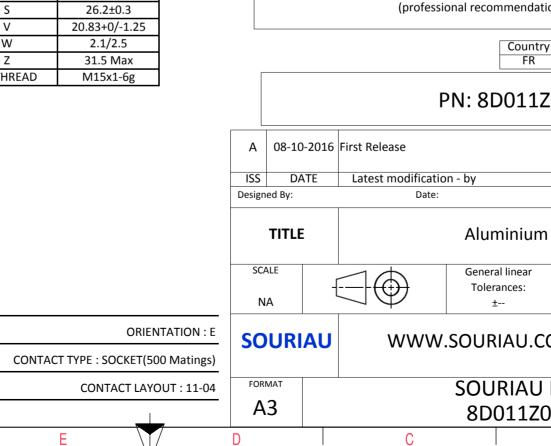

0		σ	×		
					4
LAY	YOUT SHOWN AS EXA	MPLE			3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed					
PN: 8D011Z04BE					
Latest modificatio Date:	n - by		CUSTOMER DRAWING	MOD N°	·
Aluminium Receptacle 8D series					
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
SOURIAU DRG N° 8D011Z04BE-C				SHEET	
С		В	A	1	1

-	Ŧ	۵	н г	m		0	
		Contact Layout					Panel Cutou
4	-x_	$ \begin{array}{c} $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	V-axis (mm) Y-axis (mm) + 0.65 (1.65) .065 (1.65) + 0.65 (1.65) 065 (1.65) - 0.65 (1.65) 065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65) - 0.65 (1.65) +.065 (1.65)				Ø Ø	ØI_
co						Dim ØA ØA/ R1 ØT	A
	╞					SOURIAU shall not be I due to a use of the I the Specifications issued (professional re	Products wh I by either of
N							Country FR
					A 08-10-20 ISS DATE Designed By:	116 First Release	8D011Z
					TITLE	Al	uminium
_					NA SOURIA		t
					FORMAT A3	SO	URIAU D011Z(
L	Н	G	F	E	D	C	

