

5

4

3

2



1

D

C

B

A

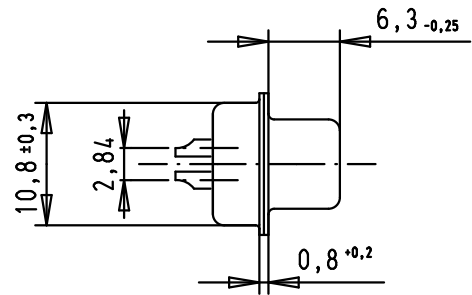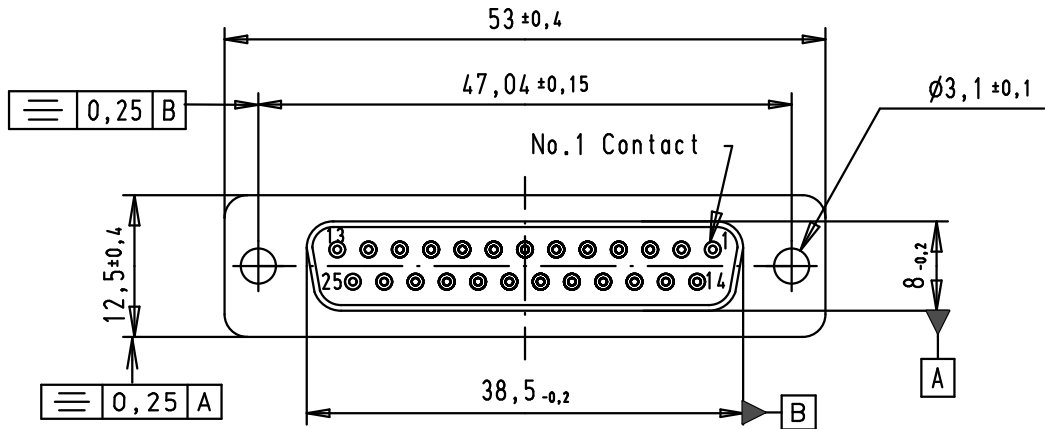




Solder buckets for AWG 20 Max

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

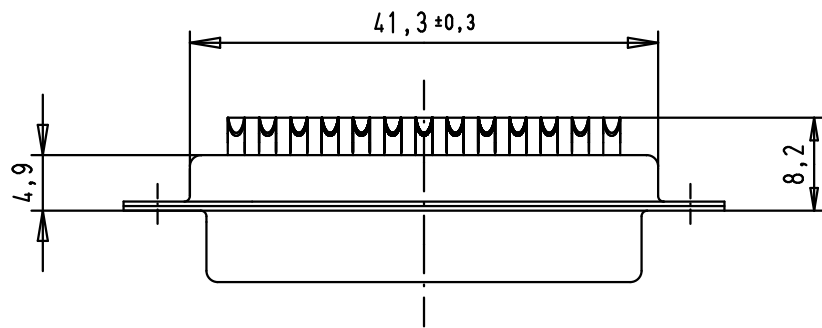

				Mod.	Dat.	Name	 <p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, female, straight, 25 Poles, solder buckets, with holes	Maßstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV				
			Insp.	12/01/12	JB				
36283	12/01/12	SD	Stand.						
33271	28/11/05	JMDR	HARTING EURL				TB 09643117240	Blatt/ Page 1 / 1	
31058	8-JUL-02	CV	F-95972 Paris						
							Sub.		