
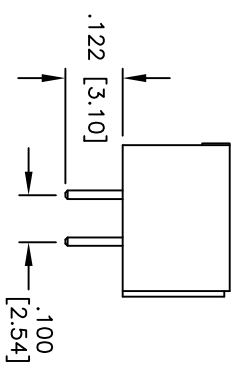
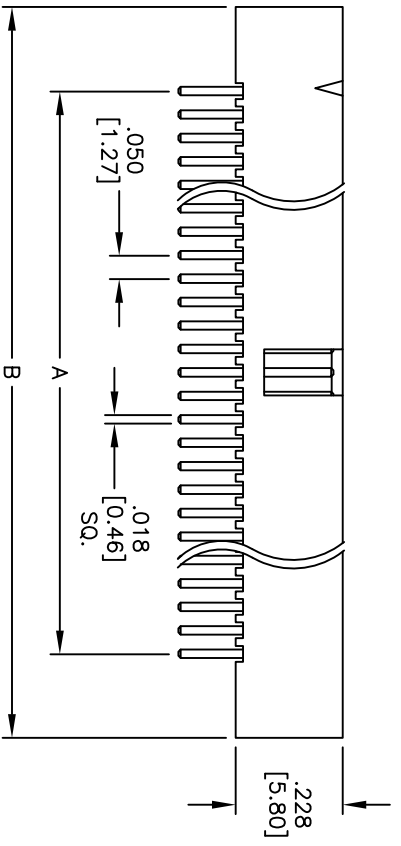
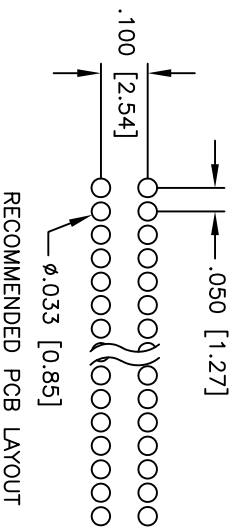


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/11	

APPROVED: _____
 DATE: _____ TITLE: _____

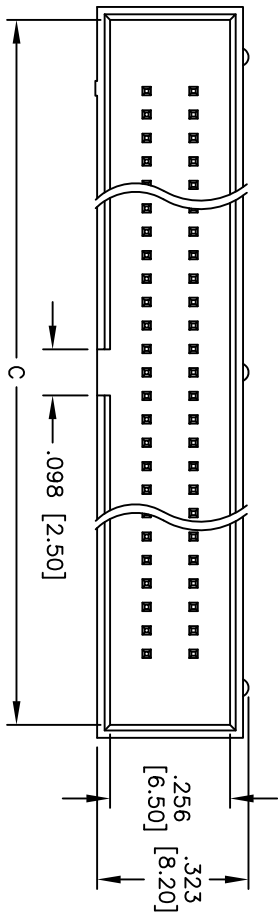

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall

Positions: 8, 10, 20, 26, 30, 34, 40, 44, 50, 60, 68, 80, 100
 A = .050 [1.27] x No. of Spaces
 B = .050 [1.27] x No. of Spaces + .366 [9.29]
 C = .050 [1.27] x No. of Spaces + .311 [7.89]

Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .10 ± .020
 .XX ± .020
 .XXX ± .015
 Holes: ØXX ± .015
 ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .050" x .100" BOX HEADER, STRAIGHT
 GOLD PLATED, PCB TYPE, HI-TEMP

APPROVALS:
 DRAWN: AY 9/20/11
 CHECKED: _____
 APPROVED: _____

SIZE	PART NO.	REV.
X	HBHR-A1-XX-VG-HT	-
REF: S0004TT	SCALE: NTS	SHEET 1 OF 1

