
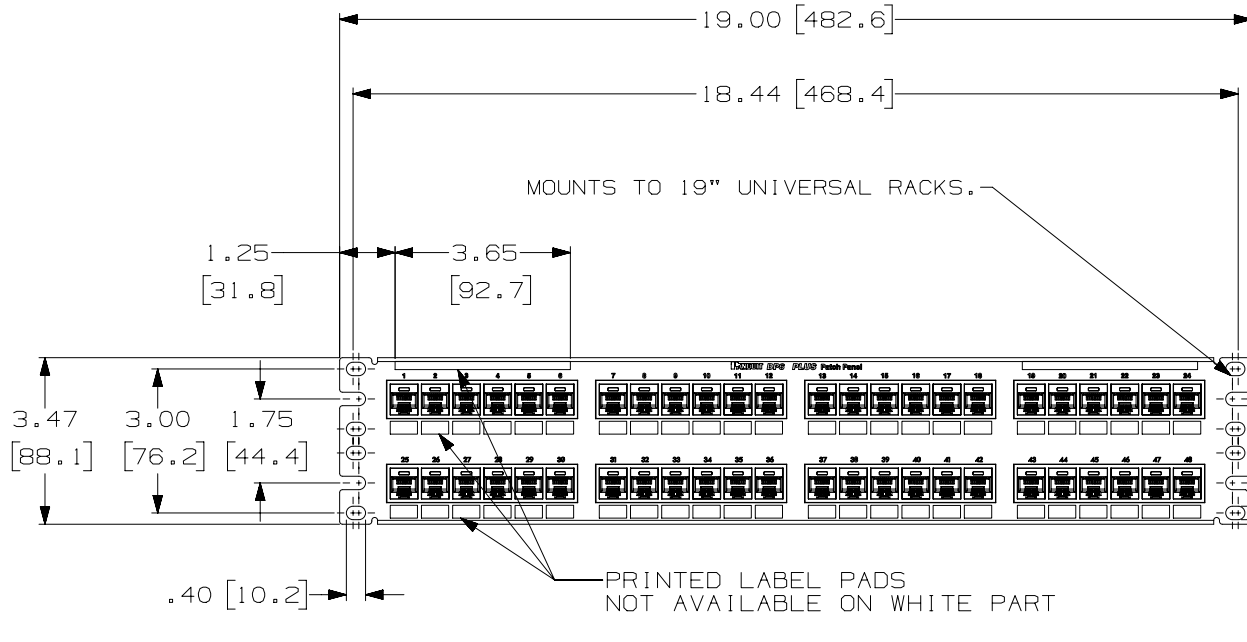


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

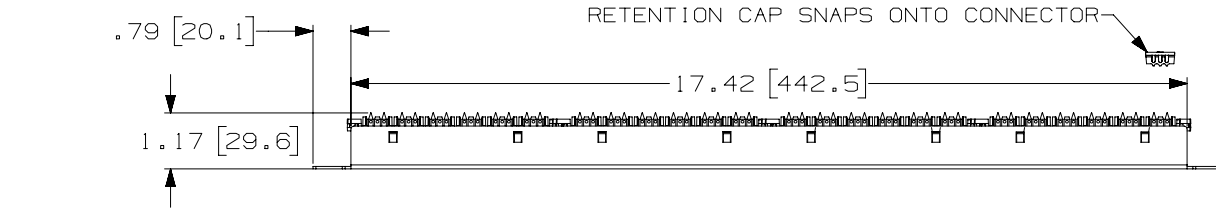

PANDUIT PART NO.	WEIGHT (APPOX.)
DP486X88TGY	2.2 lb (997.9 g)
DP486X88TGWH	2.2 lb (997.9 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER DP486X88TGY ; DP486X88TGWH	
TITLE DP6A 10GIG 48 PORT PATCH PANEL	
CUSTOMER DRAWING	
ITEM REVISION NAME M02479JA/02	PANDUIT
DATASET FILE NAME M02479JA_DC237/02A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .xxx ± .010 (.3) .xx ± .03 (.8) ANGLES ±	
THIRD ANGLE PROJECTION	
DRAWING NUMBER: 02479-237	
DRAWN BY LZ	DATE 3-4-06
CHK CEF	SCALE .25-1
SHT 1 OF 1	
SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
3	9-27-18	BAME	KRKE	MMR	B. ADDED P/N DP486X88TGWH; C. REMOVED M6 SCREWS	M09000HW
2	5-22-14	MDJR	REFR	EJH	A. UPDATED TITLE BLOCK. REMOVED PREVIOUS REVISIONS FOR CLARITY.	02479-237

D10100DA/14