


13 12 11 10 9 8 7 6 5 4 3 2 1

J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

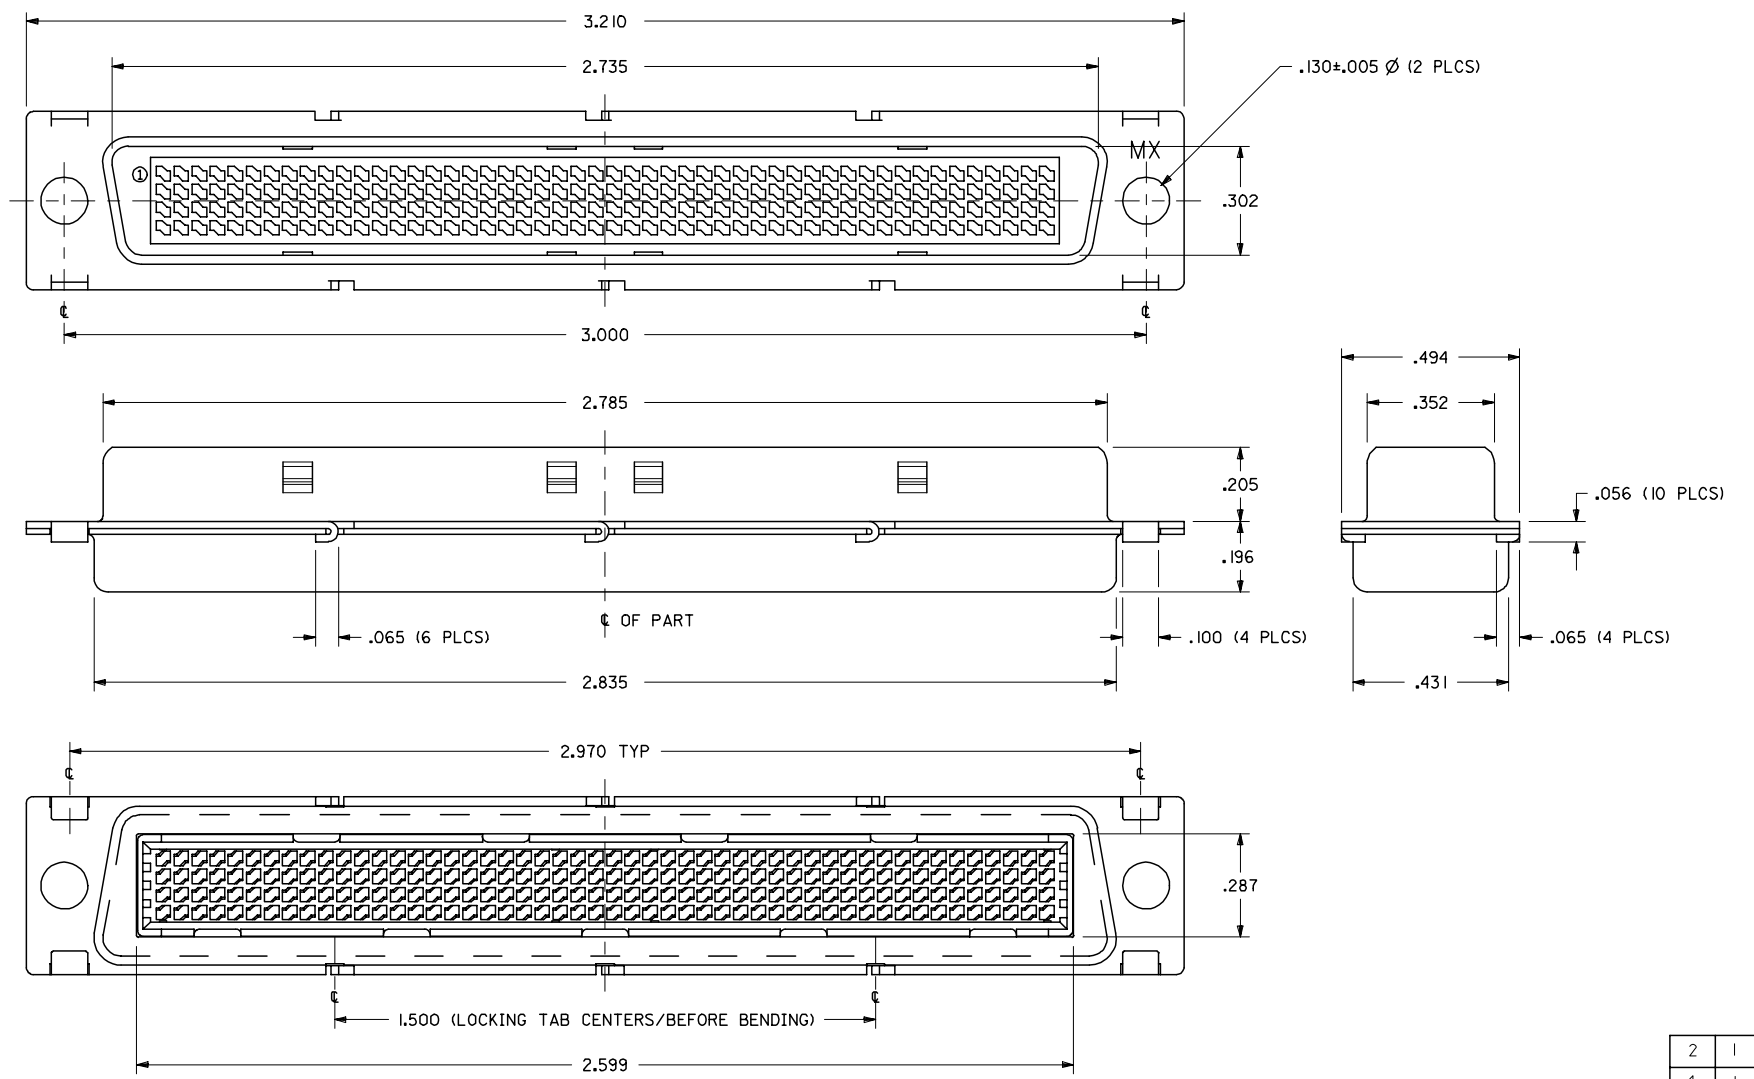

SEE SHEET 2 FOR NOTES AND PART NUMBERS

ADD 71719-3009	QUALITY SYMBOLS
EC NO: UCP2006-0666	$\nabla=0$
DRWN:MSBARRA 2006/02/06	$\nabla=0$
CHKD:DMORGAN 2006/02/07	
APPR:SMILLER 2006/02/09	
REV	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .010	± .004
3 PLACES ± .015	± .005
2 PLACES ± .020	± .008
1 PLACE ± .030	± .012
ANGULAR ± 1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	


DIMENSION STYLE INCH ONLY	
DRAWN BY	DATE
GLT	95/05/15
CHECKED BY	DATE
GLT	95/05/15
APPROVED BY	DATE
GW	95/05/15
MATERIAL NO.	
SIZE	

SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE .050 PITCH LFH, 200CKT MALE HOUSING/SHIELD SUB-ASSY FOR CABLE APP.		
MATERIAL NO. SDA-71719-3***		
DOCUMENT NO. SDA-71719-3***		SHEET NO. 1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

2	I
1	I
SHT	REV

12 11 10 9 8 7 6 5 4 3 2 1

13	12	11	10	9	8	7	6	5	4	3	2	1
ITEM NUMBER	PRODUCT DESCRIPTION	ADDITIONAL COMPONENT REQUIREMENTS (SEE NOTE 6)				FRONT SHELL PLATING						
71719-3000	200 CKT I/O PLUG CONNECTOR SUB-ASSEMBLY	FOUR (4) .050" PITCH LFH, 50 CIRCUIT MALE INSERT-MOLDED CONTACT STRIPS (P/N 71715-4002)				BRIGHT TIN						
71719-3009	200 CKT I/O PLUG CONNECTOR SUB-ASSEMBLY	FOUR (4) .050" PITCH LFH, 50 CIRCUIT MALE INSERT-MOLDED CONTACT STRIPS (P/N 71715-4002)				BRIGHT NICKEL						

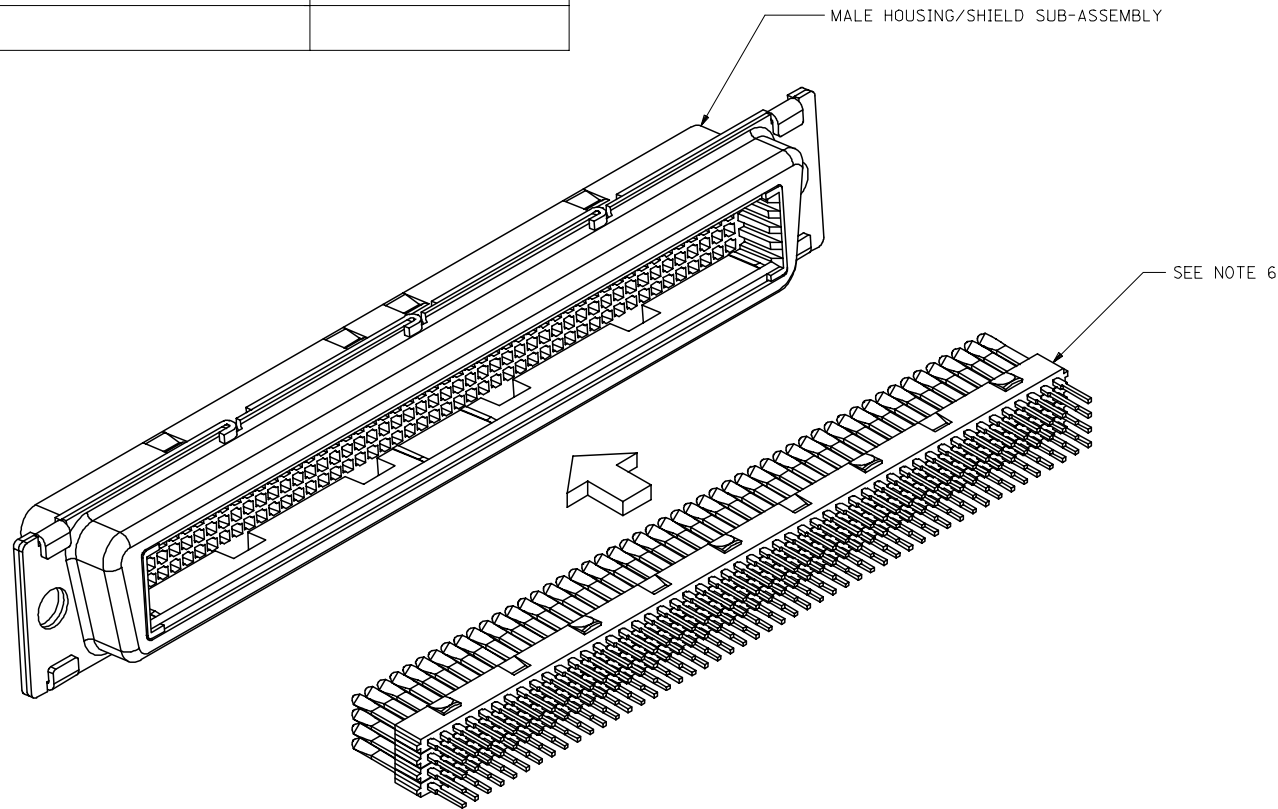

- NOTES:
- MATERIALS:**
THE INTERNAL PLASTIC HOUSING IS GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), RATED U.L. 94 V-0, COLOR IS BLACK; THE FRONT AND BACK SHELLS ARE DEEP DRAWN STEEL, .020" AND .016" THICK RESPECTIVELY.
 - FINISH:**
FRONT SHELL:
BRIGHT TIN: 150-250 MICROINCHES BRIGHT TIN OVER 50-150 MICROINCHES NICKEL OVER COPPER FLASH OVERALL (OPTIONAL).
BRIGHT NICKEL: 100-175 MICROINCHES BRIGHT NICKEL OVER 50 MICROINCHES MAXIMUM COPPER OVERALL.
BACK SHELL:
150-250 MICROINCHES BRIGHT TIN OVER 50-150 MICROINCHES NICKEL OVER COPPER FLASH OVERALL (OPTIONAL)
 - PARTS CONFORM TO MOLEX PRODUCT SPECIFICATION *PS-71719-9999.
 - PARTS CONFORM TO MOLEX APPLICATION SPECIFICATION *AS-71719-9998.
 - THE INSERT-MOLDED CONTACT STRIPS THAT ARE NEEDED TO COMPLETE THIS CABLE ASSEMBLY ARE SUPPLIED SEPARATELY; SEE THE CHART ABOVE AND THE MOLEX SALES DRAWING *SDA-71715-4002 FOR THE DESCRIPTION AND DIMENSIONS.
 - THE CONNECTOR SUB-ASSEMBLY SHOWN ON THIS DRAWING IS PACKAGED PER MOLEX SPECIFICATION *PK-70873-0255.

ADD 71719-3009 EC NO: UCP2006-0666 DRAWN BY: BARRA 2006/02/06 CHKD: DMORGAN 2006/02/07 APPR: SMILLER 2006/02/09	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm	INCH	DRAWN BY	DATE	TITLE			
		4 PLACES ± ---	± ---	GLT	95/05/15	.050 PITCH LFH, 200 CKT MALE HOUSING/SHIELD SUB-ASSY FOR CABLE APP			
		3 PLACES ± ---	± .010	CHECKED BY	DATE	MOLEX MOLEX INCORPORATED			
2 PLACES ± ---	± ---	GLT	95/05/15	APPROVED BY		DATE	MATERIAL NO.		
1 PLACE ± ---	± ---		95/05/15	JWF		95/05/15	DOCUMENT NO.		
ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SDA-71719-3***		SHEET NO. 2 OF 2	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									