
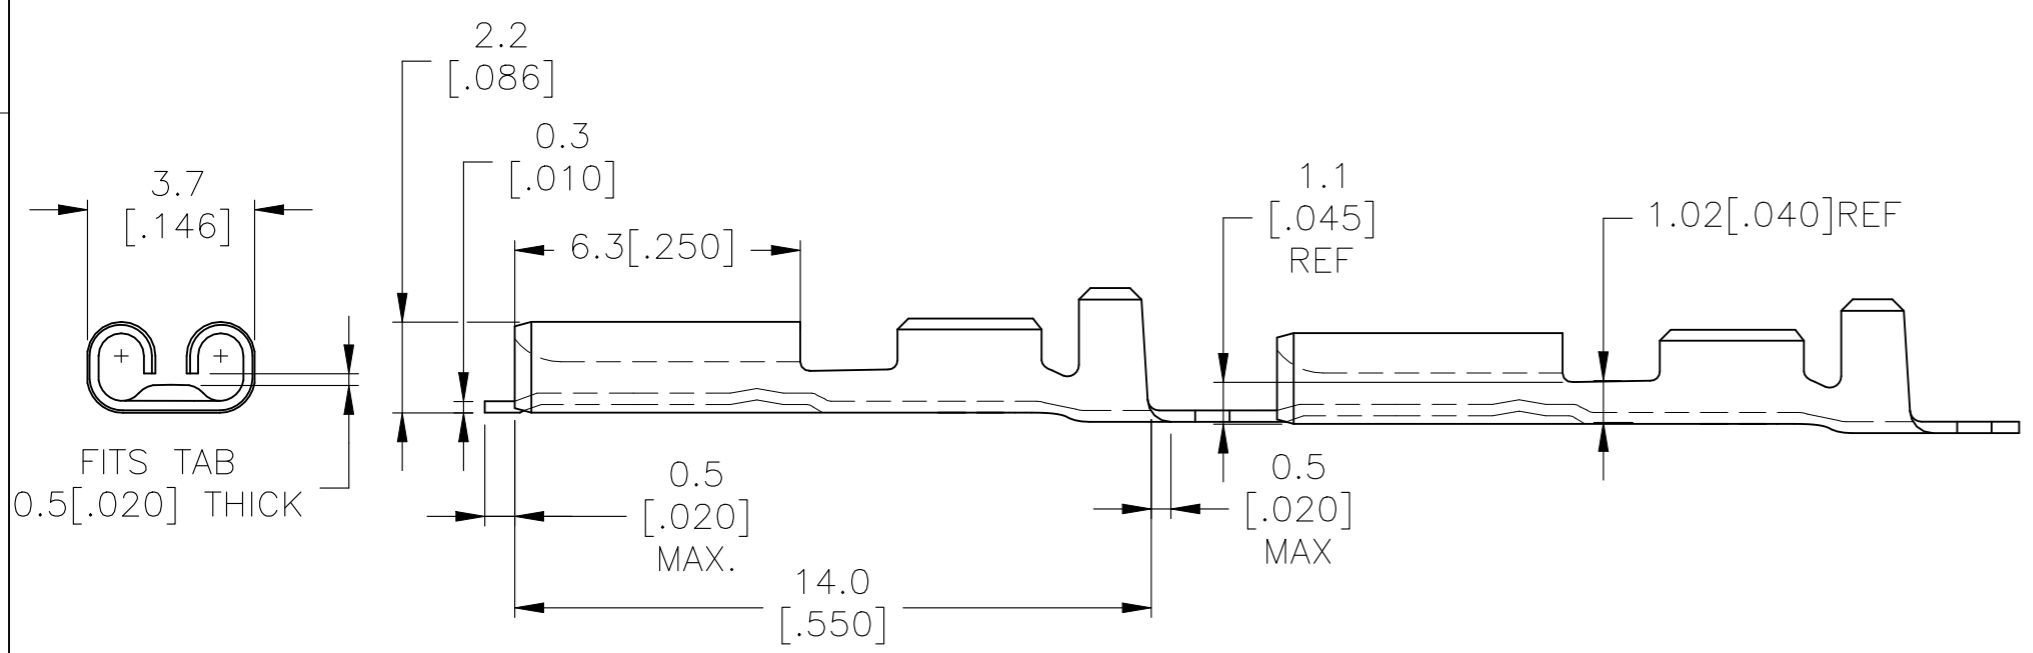


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	G2	REVISED PER ECR-23-171745	18APR2023	DB DH

- △ 1 SPLICE FREE, FOR AMP_O_MATOR.
- △ 2 REELED WITH PAPER LAYER.
- △ 3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CHAMFER

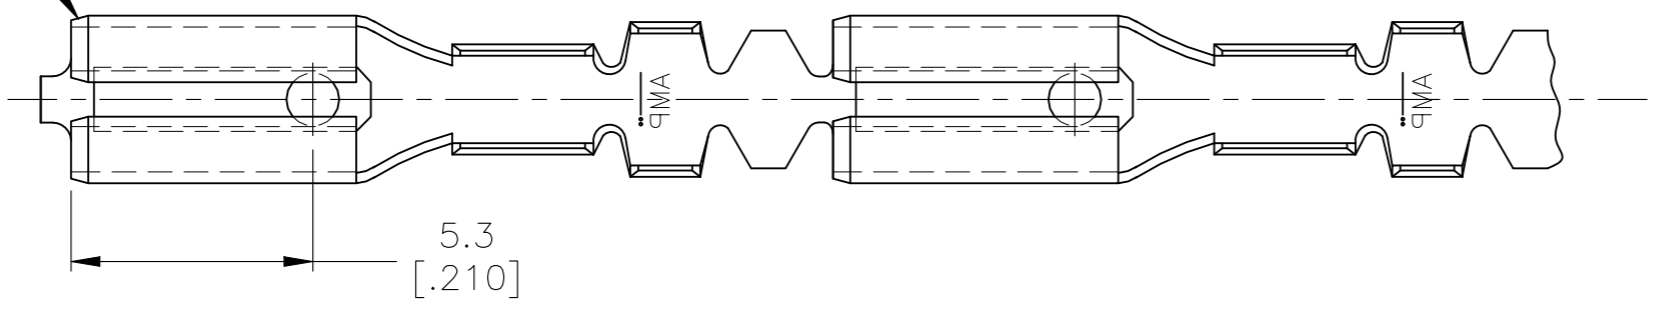

△ 3	TIN	BRASS	△ 2	6-160316-4
	TIN-LEAD	PHOSPHORBRONZE		6-160316-3
△ 3	TIN-LEAD	BRASS		6-160316-2
△ 3	PRE-TIN HOT DIP	PHOSPHORBRONZE		6-160316-0
△ 3	TIN	BRASS	△ 1	5-160316-9
△ 3	NONE	BRASS	△ 1	5-160316-8
	GOLD	PHOSPHORBRONZE		5-160316-7
△ 3	TIN	PHOSPHORBRONZE		5-160316-6
	NONE	PHOSPHORBRONZE		5-160316-5
△ 3	GOLD	BRASS		5-160316-4
	SILVER	BRASS		5-160316-3
	TIN	BRASS		5-160316-2
	NONE	BRASS		5-160316-1
	FINISH	MATERIAL		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KESSLER	11-04-94	STE TE Connectivity	
		CHK P.BEIJNON			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		.110 SRS FASTON RECEPTACLE	
		0 PLC ± 1.0 1 PLC ± 0.5 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± 1°			
WIRE RANGE : 0.3-0.56mm ² (22-20 AWG)		INSUL-RANGE : ø 1.0-2.0 (ø .050-.080)		RESTRICTED TO	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO	
				A3 00779 C-160316	
CUSTOMER DRAWING				SCALE 6:1	SHEET 1 OF 1
				REV G2	