

REV. 0
DCO 102280


COIL: @ 25°C	
RESISTANCE	300 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.7 VDC
MUST RELEASE	1.8 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	30	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 10 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

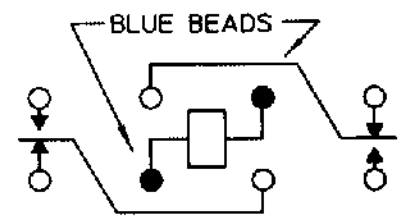

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	RESISTIVE 100,000 OPERATIONS

DR. B.D. 1/27/00 CK. 69H 1/27/00



CUST. C. I. I. STD
CUST. NO. REV.

'07' RELAY

B07B112CC1