

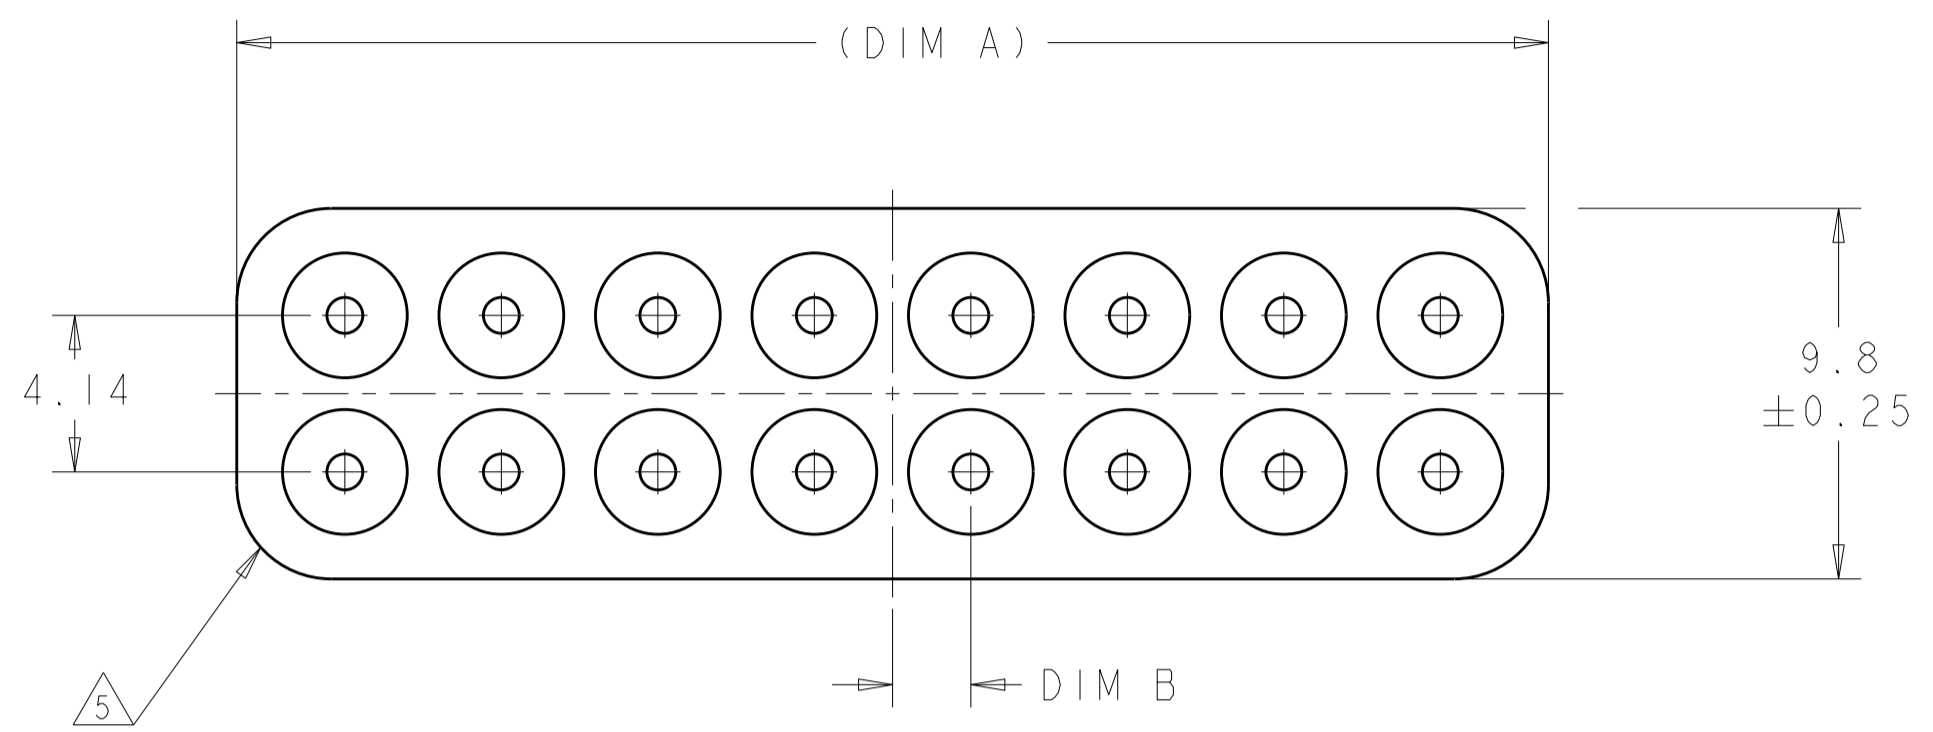


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	B2	REVISED PER ECR 12-001154	19JAN12	JR	TM		

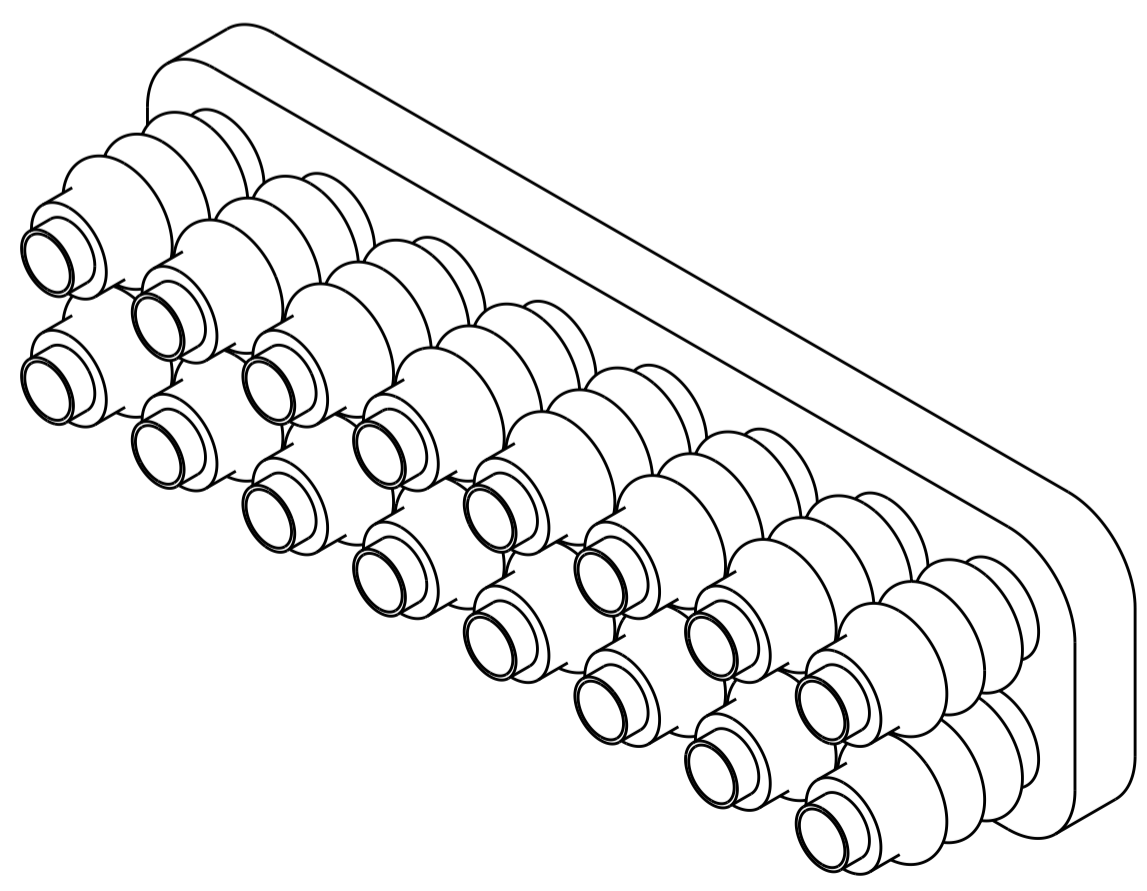

- 1 MATERIAL: SELF LUBRICATING SILICON RUBBER. COLOR: BLUE.
- 2. SEALS HAVE PASSED WATER INTRUSION TESTING TO LEVEL IPX4 PER IEC 60529, PARAGRAPH 14.2.4.
- 3. ACCEPTS WIRES WITH INSULATION DIAMETER OF 1.27 - 2.11.
- 4 RING GATE AREA, FLASH ALLOWABLE.
- 5 TWO OF THE FOUR CORNERS MAY BE SQUARE INSTEAD OF ROUNDED.

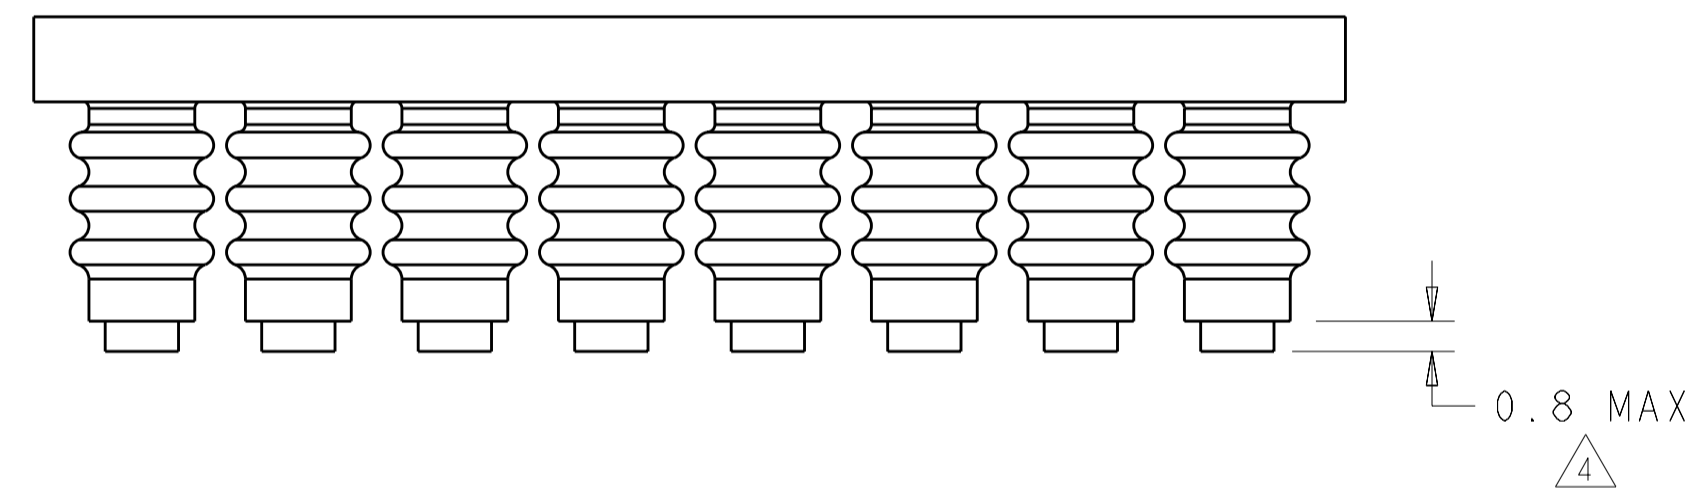

1279.86	2.07	34.7	16	1-1586359-6
808.45	0	22.28	10	1-1586359-0
651.31	2.07	18.14	8	1586359-8
494.18	0	14	6	1586359-6
337.04	2.07	9.86	4	1586359-4
179.9	0	5.72	2	1586359-2
VOLUME mm ³	DIM B	DIM A	CKT	PART NO.

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	06-OCT-2003	TE Connectivity	
mm	0 PLC ±	CHK	06-OCT-2003		
	1 PLC ±0.2	APVD	06-OCT-2003		
	2 PLC ±0.13	NAME	GANG WIRE SEAL, MINI UNIVERSAL MATE-N-LOK(TM)		
	3 PLC ±	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	4 PLC ±	WEIGHT	A200779	C-1586359	
	ANGLES ±°	CUSTOMER DRAWING	SCALE	5:1	SHEET 1 OF 1
	FINISH				REV B2