


REV.	DATE	DESCRIPTION
A	02/06/00	UPDATE TITLE/ INSULATOR MATERIAL
B	07/19/07	UPDATE DRAWING FORMAT

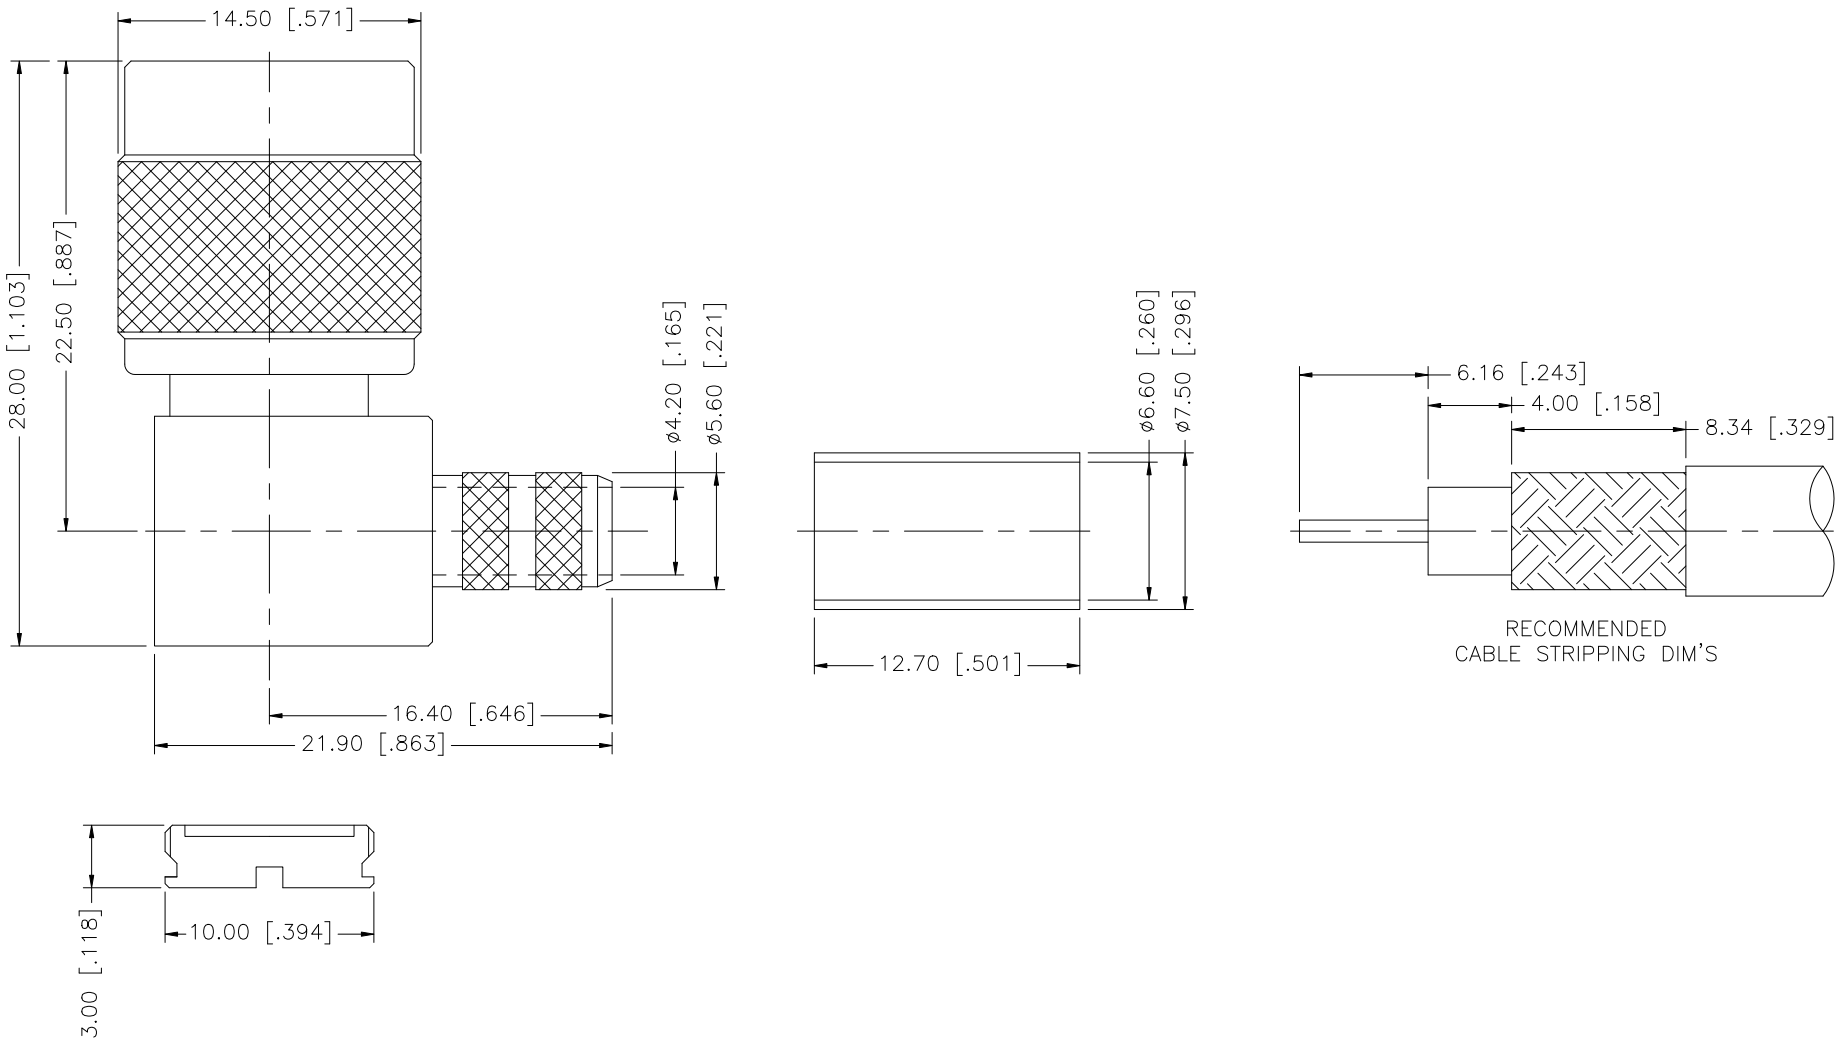

RECOMMENDED  
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	QTY	
8				
7				
6				
5	COVER	BRASS	NICKEL	1
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
 0.5 - 8mm  $\pm$  0.20mm  
 8 - 30mm  $\pm$  0.40mm  
 30 - 120mm  $\pm$  0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
 .020 - .315 =  $\pm$  0.007"  
 .315 - 1.180 =  $\pm$  0.015"  
 1.180 - 4.724 =  $\pm$  0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/19/07
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/122/122414.DWG

**Amphenol Connex**

PART DESCRIPTION  
**TNC R/A CRIMP PLUG  
 (FOR BELDEN RG-8/X TIMES LMR-240MA CABLE)**

PART NO.  
**122414**

DWG. NO.	122414.DWG	REV.	B	SIZE	A	SCALE	NA
----------	------------	------	---	------	---	-------	----