
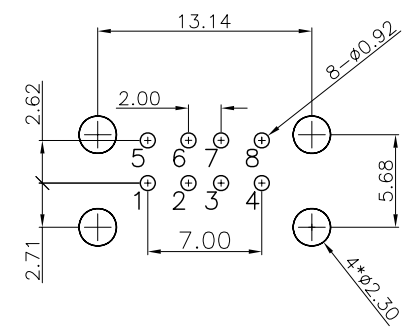


NOTES:
 MATERIAL:
 CONTACTS:BRASS T=0.25mm
 INSULATOR:PBT+30%G.F. UL 94V-0
 FRONT SHELL:BRASS T=0.30mm
 BACK SHELL:SPCC T=0.30mm
 SPRING:SPCC
 MECHANICAL:
 MATING:35N MA
 WITHDRAWAL FORCE:10N MIN
 DURABILITY:1500CYCLES MIN
 ELECTRICAL:
 CURRENT RATING1.5A
 VOLTAGE RATING:30V
 WITHSTANDING VOLTAGE:750V AC
 CONTACT RESISTANCE:25mΩ MAX
 INSULATION RESISTANCE:1000MΩ MIN
 PLATING
 CONTACTS:GOLD FLASH AND TIN OVER NICKEL PLATED
 SHELL:NICKEL OVER ALL PLATING
 ENVIRONMENTAL:
 TEMPERATURE RANGE:-55°C TO+85°C

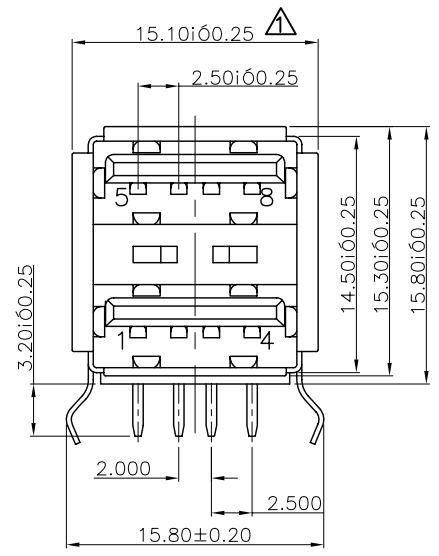

P.C.B LAYOUT

10/01/30	ING	EG-N1012072			A3				
09/12/29	BENDEE	EG-H12067	變更尺寸標注位置	△	A2				
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.				
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表			<div style="text-align: center;"> <h1>CnC Tech,LLC</h1> </div>						
X.X	±0.38	X.X°				±2.0°	APPD:	PRODUCT NO: 1001-004-01010	
X.XX	±0.25	X.XX°	±1.0°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX	±0.13	X.XXX°	±0.5°	DRAW:	2010.01.30	1:1	mm	CD	1/1