

G1G146-BA07-52

# EC centrifugal fan

forward curved, single inlet  
with housing (flange)



## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
County court Stuttgart · HRB 590142

## Nominal data

|                          |                   |          |
|--------------------------|-------------------|----------|
| Type                     | G1G146-BA07-52    |          |
| Motor                    | M1G074-BF         |          |
| Nominal voltage          | VDC               | 24       |
| Nominal voltage range    | VDC               | 16 .. 28 |
| Type of data definition  |                   | fa       |
| Speed                    | min <sup>-1</sup> | 2200     |
| Power input              | W                 | 100      |
| Current draw             | A                 | 5.0      |
| Min. ambient temperature | °C                | - 25     |
| Max. ambient temperature | °C                | +60      |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



G1G146-BA07-52

# EC centrifugal fan

forward curved, single inlet

with housing (flange)

## Technical features


|  |   |
|--|---|
| <b>Mass</b>  | 2.8 kg  |
| <b>Size</b>  | 146 mm  |
| <b>Material of impeller</b>                                    | Sheet steel, galvanised   |
| <b>Housing material</b>  | Die-cast aluminium  |
| <b>Direction of rotation</b>                                   | Clockwise, seen on rotor  |
| <b>Type of protection</b>                                      | IP 42   |
| <b>Insulation class</b>  | "B"   |
| <b>Humidity class</b>  | F0  |
| <b>Max. permissible ambient motor temp. (transp./ storage)</b> | +80 °C  |
| <b>Min. permissible ambient motor temp. (transp./storage)</b>  | -40 °C  |
| <b>Mounting position</b>                                       | Any   |
| <b>Condensate discharge holes</b>                              | None  |
| <b>Operation mode</b>  | S1  |
| <b>Motor bearing</b>   | Ball bearing  |
| <b>Technical features</b>                                      | <ul style="list-style-type: none"><li>- Tach output</li><li>- Motor current limit</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li></ul> |
| <b>EMC interference immunity</b>                               | Acc. to EN 61000-6-2 (industrial environment)   |
| <b>EMC interference emission</b>                               | Acc. to EN 55022 (Class B)  |
| <b>Motor protection</b>  | Reverse polarity and locked-rotor protection  |
| <b>Cable exit</b>  | Axial   |
| <b>Product conforming to standard</b>                          | EN 60950-1  |
| <b>Approval</b>  | UL 1004-1; GOST; CSA C22.2 Nr.77  |



# EC centrifugal fan

forward curved, single inlet  
with housing (flange)

## Product drawing

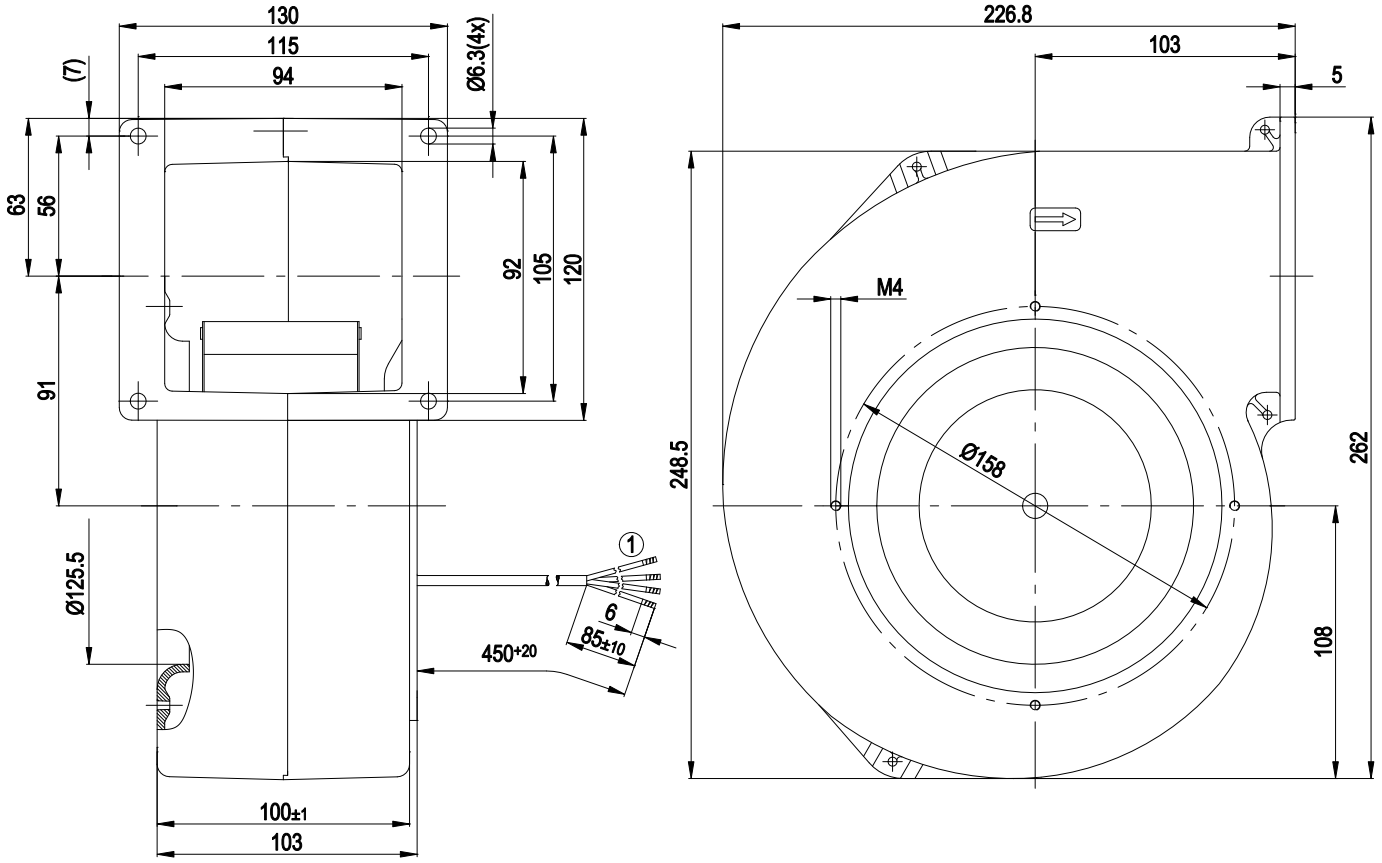

1 Connection line AWG20; 4 x brass lead tips crimped




# EC centrifugal fan

forward curved, single inlet  
with housing (flange)


## Connection screen

### Customer circuit

Full speed




Adjustable speed




10 V → n = max  
1 V → n = min  
<1 V → n = 0  
Safe start at  
Unom -30%  
from 4 V Ucontr.

Speed adjustable via potentiometer




Speed adjustable via PWM 1-10 kHz



100% PWM → n = max  
10% PWM → n = min  
<10% PWM → n = 0  
Safe start at  
Unom -30%  
from 40% PWM


Preset target value via temperature controller



T < 10 °C → n = 0  
T > 45 °C → n = max

### Connection


### Fan/Motor

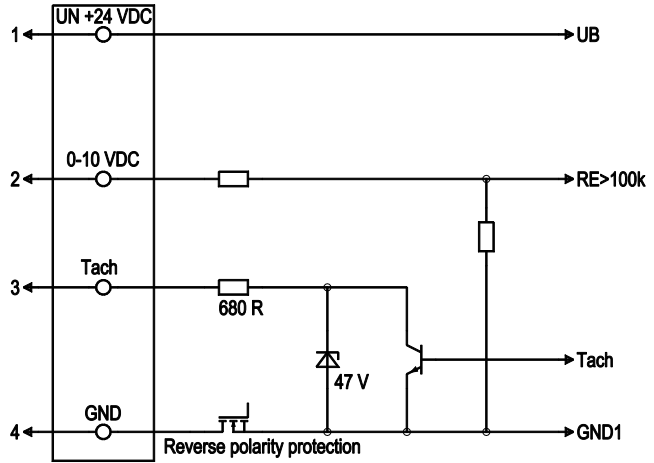

| Line | No. | Signal     | Colour | Function / assignment   |
|------|-----|------------|--------|---|
| 1    | 1   | Un +24 VDC | red    | Power supply 24 VDC, residual ripple 3.5 %                          |
| 1    | 2   | 0-10 VDC   | yellow | Control input Re > 100 K  |
| 1    | 3   | Tach       | white  | Speed monitoring output, 3 pulses per revolution, Isink max = 10 mA |
| 1    | 4   | GND        | blue   | Reference mass  |



## Charts: Air flow

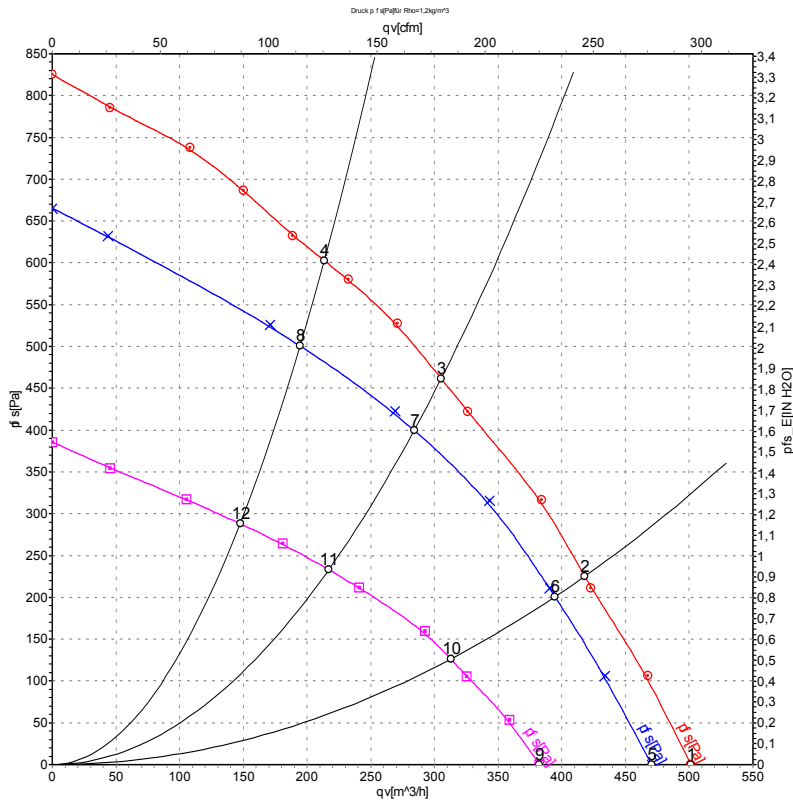

Measurement: LU-49675  
Measurement: LU-49674  
Measurement: LU-49676

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U  | n                 | P <sub>ed</sub> | I    | qv                | p <sub>fs</sub> |
|----|----|-------------------|-----------------|------|-------------------|-----------------|
|    | V  | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              |
| 1  | 28 | 2350              | 124             | 5.54 | 500               | 0               |
| 2  | 28 | 2585              | 118             | 5.03 | 420               | 224             |
| 3  | 28 | 2955              | 110             | 4.48 | 305               | 461             |
| 4  | 28 | 3275              | 101             | 4.00 | 215               | 603             |
| 5  | 24 | 2200              | 100             | 5.00 | 470               | 0               |
| 6  | 24 | 2425              | 98              | 4.67 | 395               | 200             |
| 7  | 24 | 2745              | 88              | 4.09 | 285               | 400             |
| 8  | 24 | 3000              | 76              | 3.49 | 195               | 500             |
| 9  | 16 | 1810              | 56              | 3.90 | 380               | 0               |
| 10 | 16 | 1950              | 50              | 3.45 | 315               | 126             |
| 11 | 16 | 2140              | 42              | 2.90 | 215               | 233             |
| 12 | 16 | 2295              | 36              | 2.55 | 150               | 288             |

U = Supply voltage · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

