



UNIT:mm

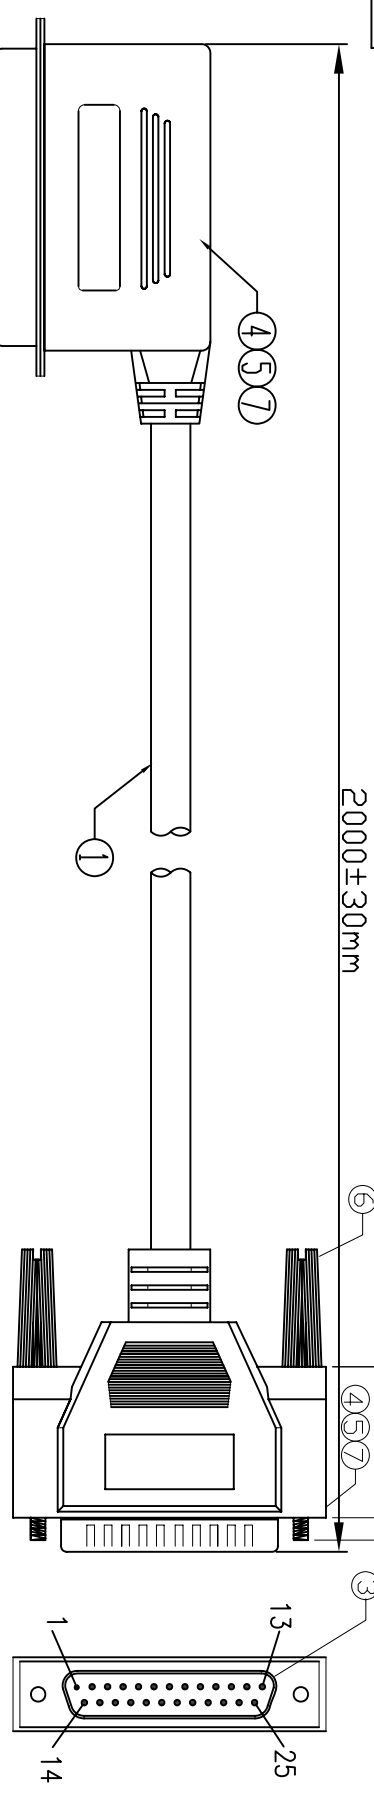

(Mould NO.:WM-017)  
(Mould NO.:NM-33)

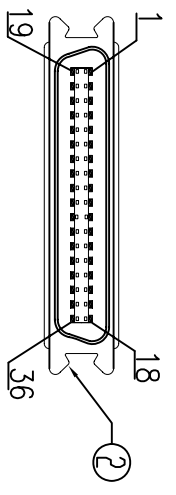

P1 (BAFO MOLD CN36 T/N:C-003A)

Electronic Test:

1. 100% Test,(Open,Short,Miss Wire)
2. Contact Resistance:3 ohm max.
3. Insulation Resistance:20M ohm min.
4. Hi-Pot:100V DC/10ms

PIN ASSIGNMENT

P1	P2	P1	P2	P1	P2
1 BLACK	1 WHITE	10	10	19 WHITE/BLACK	19
2 BROWN	2 PINK	11	11	20 RED/WHITE	20
3 RED	3 GREEN(LIGHT)	12	12	21 ORANGE/WHITE	21
4 ORANGE	4 RED/BLACK	13	13	22 GREEN/WHITE	22
5 YELLOW	5 ORANGE/BLACK	14	14	23 BLUE/WHITE	23
6 GREEN	6 YELLOW/BLACK	15	15	24 VIOLET/WHITE	24
7 BLUE	7 GREEN/BLACK	16	16	25 BROWN/WHITE	25
8 VIOLET	8 BLUE/BLACK	17	17	26 SHELL	26
9 GREY	9 VIOLET/BLACK	18	18	27 SHELL	27


NO.	NAME	Q'TY	SPECIFICATION
①	CABLE	1	NOUL 28#(7/0.12)*25C+D+AL/MY JACKET BEIGE(V-29) OD:7.0±0.15mm. L2020+20/-0mm.
②	CONN	1	CN 36P MALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
③	CONN	1	DB 25PIN MALE PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLUE
④	IN JACKET	23g	CLEAR LD-PE
⑤	OUT JACKET	72g	BEIGE(V-29) 40P PVC
⑥	SCREW	2	#4-40UNC TYPE D-E L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*L15MM

**Cnc Tech, LLC**  
Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	700-10098-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PRODUCTION	

4 3 2 1 2 1 4 3 2 1

UNIT:mm

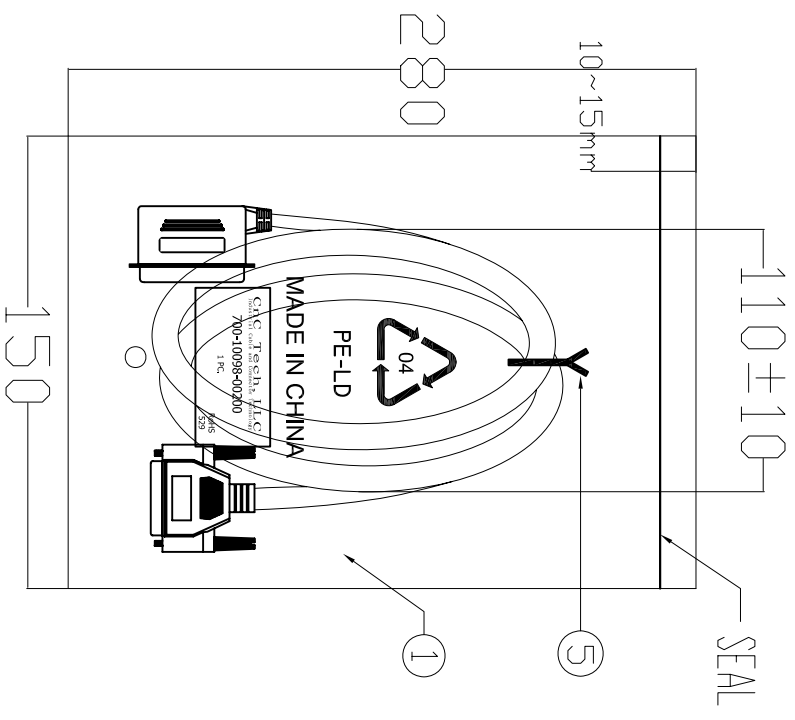

⑤	TIE	1	TIE WHITE L=120mm.
④	PE BAG	1/50	透明防水袋31"×31"×0.04mm.
③	CARTON	1/50	46*30*25CM K&K 粘口
②	PE BAG	1/10	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS" 及印生产周期,有透气孔.
①	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC" 及印生产周期,有透气孔.
NO.	NAME	Q'TY	SPECIFICATION

<b>CNC Tech, LLC</b>			
Industrial Cable and Connector Technology			
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	700-10098-00200
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	

