


	т	۵	н т	m		0
--	---	---	------------	---	--	---

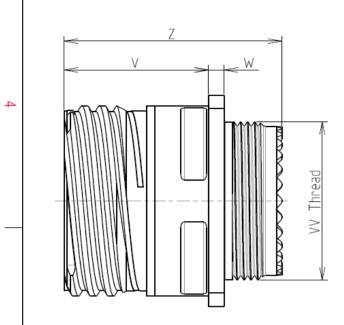

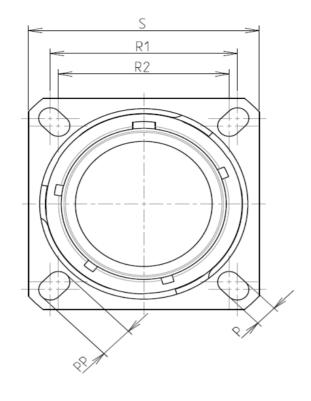



LAYOUT SHOWN AS

Keying Shown as example

L

Е

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium				
	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
	-Seals & Grommet	: Silicon Elastomer				
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered without Sou	-Delivered without Souriau contacts				
	-Temperature Range	65°C to +200°C				
	-Salt Spray	: 48 hours				
	-Mass	: 11.22 g ± 10%				

8D 0

G

11

F

22

Ρ

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 11-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : E



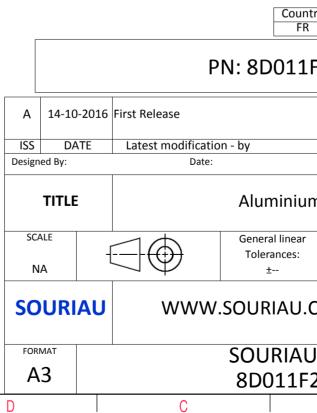

σ	₿ >				
				4	
AS EXAMPLE				3	
any non-conform which does not c er of the Parties or idation, technical i intry Juris R 1F22PEL	omply with by a third part			2	
			MOD N°		
um Receptad J.COM U DRG N° F22PEL-C	communicated without permission DRG N°				
FZZPEL-C B		A	1/2	J	

		Contact Layout				Panel Cuto
		22*				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(0 0 0			2	
	-	4#22D	1		ļ	
	Ctc A B	X Y 1.905 1.905 1.905 -1.905				
	C D	-1.905 -1.905 -1.905 1.905				Dim ØA
ယ		-1.505	J			ØAA R1
						ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommenda
N						Count
						PN: 8D011
					A 14-10-20	16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Aluminiu
_					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAL 8D011F
	Н	G	F	E	D	C
					V	

Т

ш

т

G

0

