



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86	P		REV PER ECO-11-008916	13MAY11	PY	BW

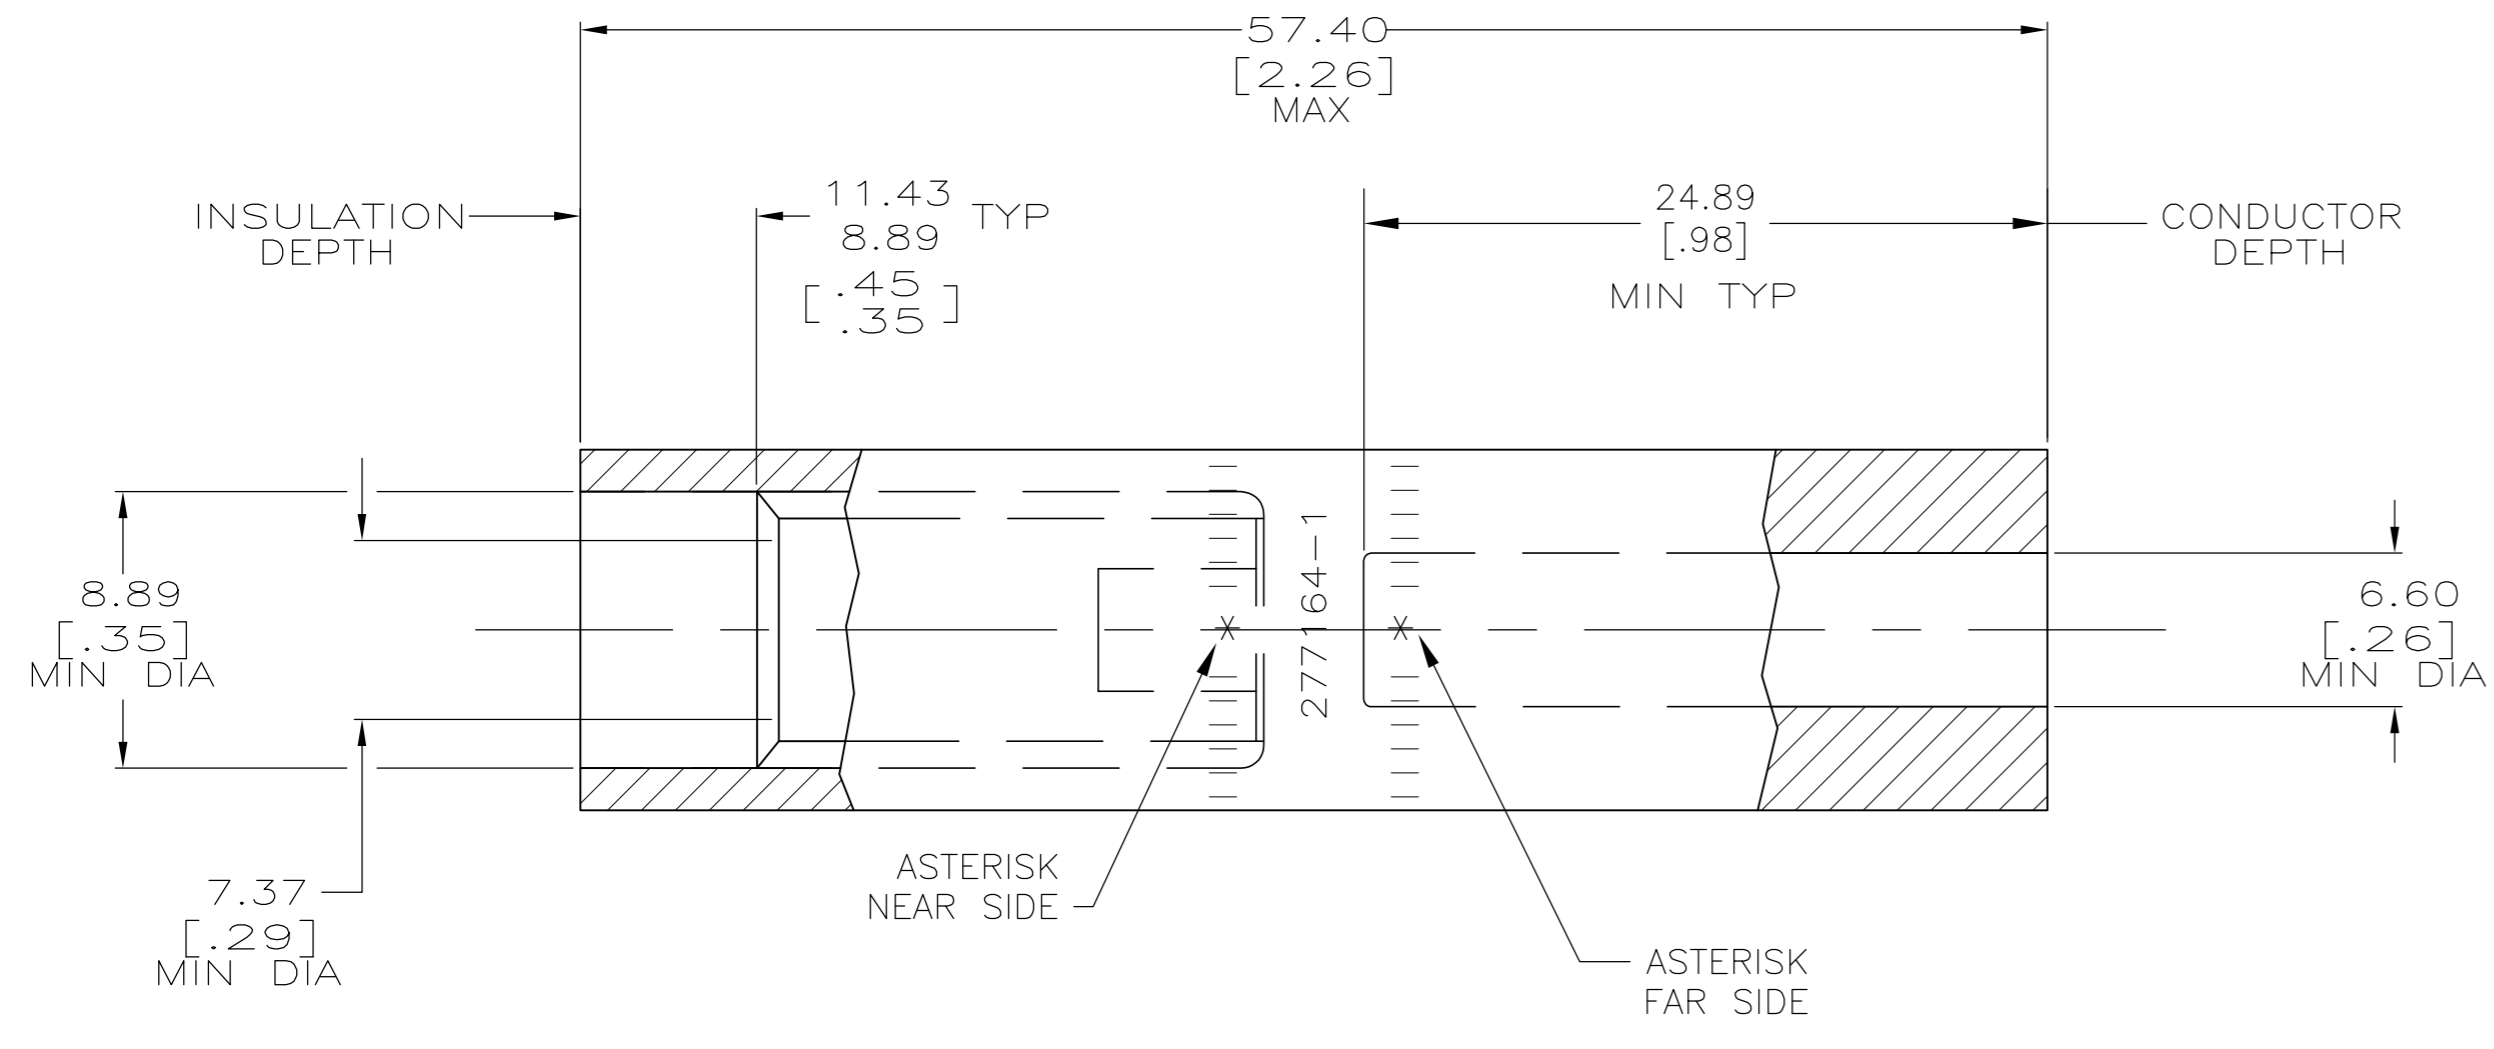

- 1 WIRE INSULATION:  
 END 'A' 7.01[.276] - 7.75[.305] DIA FOR 4 AL  
 END 'B' 5.33[.210] - 6.48[.255] DIA FOR 8 CU
- 2 STAMP " 277164-1 AMP 4AL-8CU"  
 LOCATED APPROX AS SHOWN

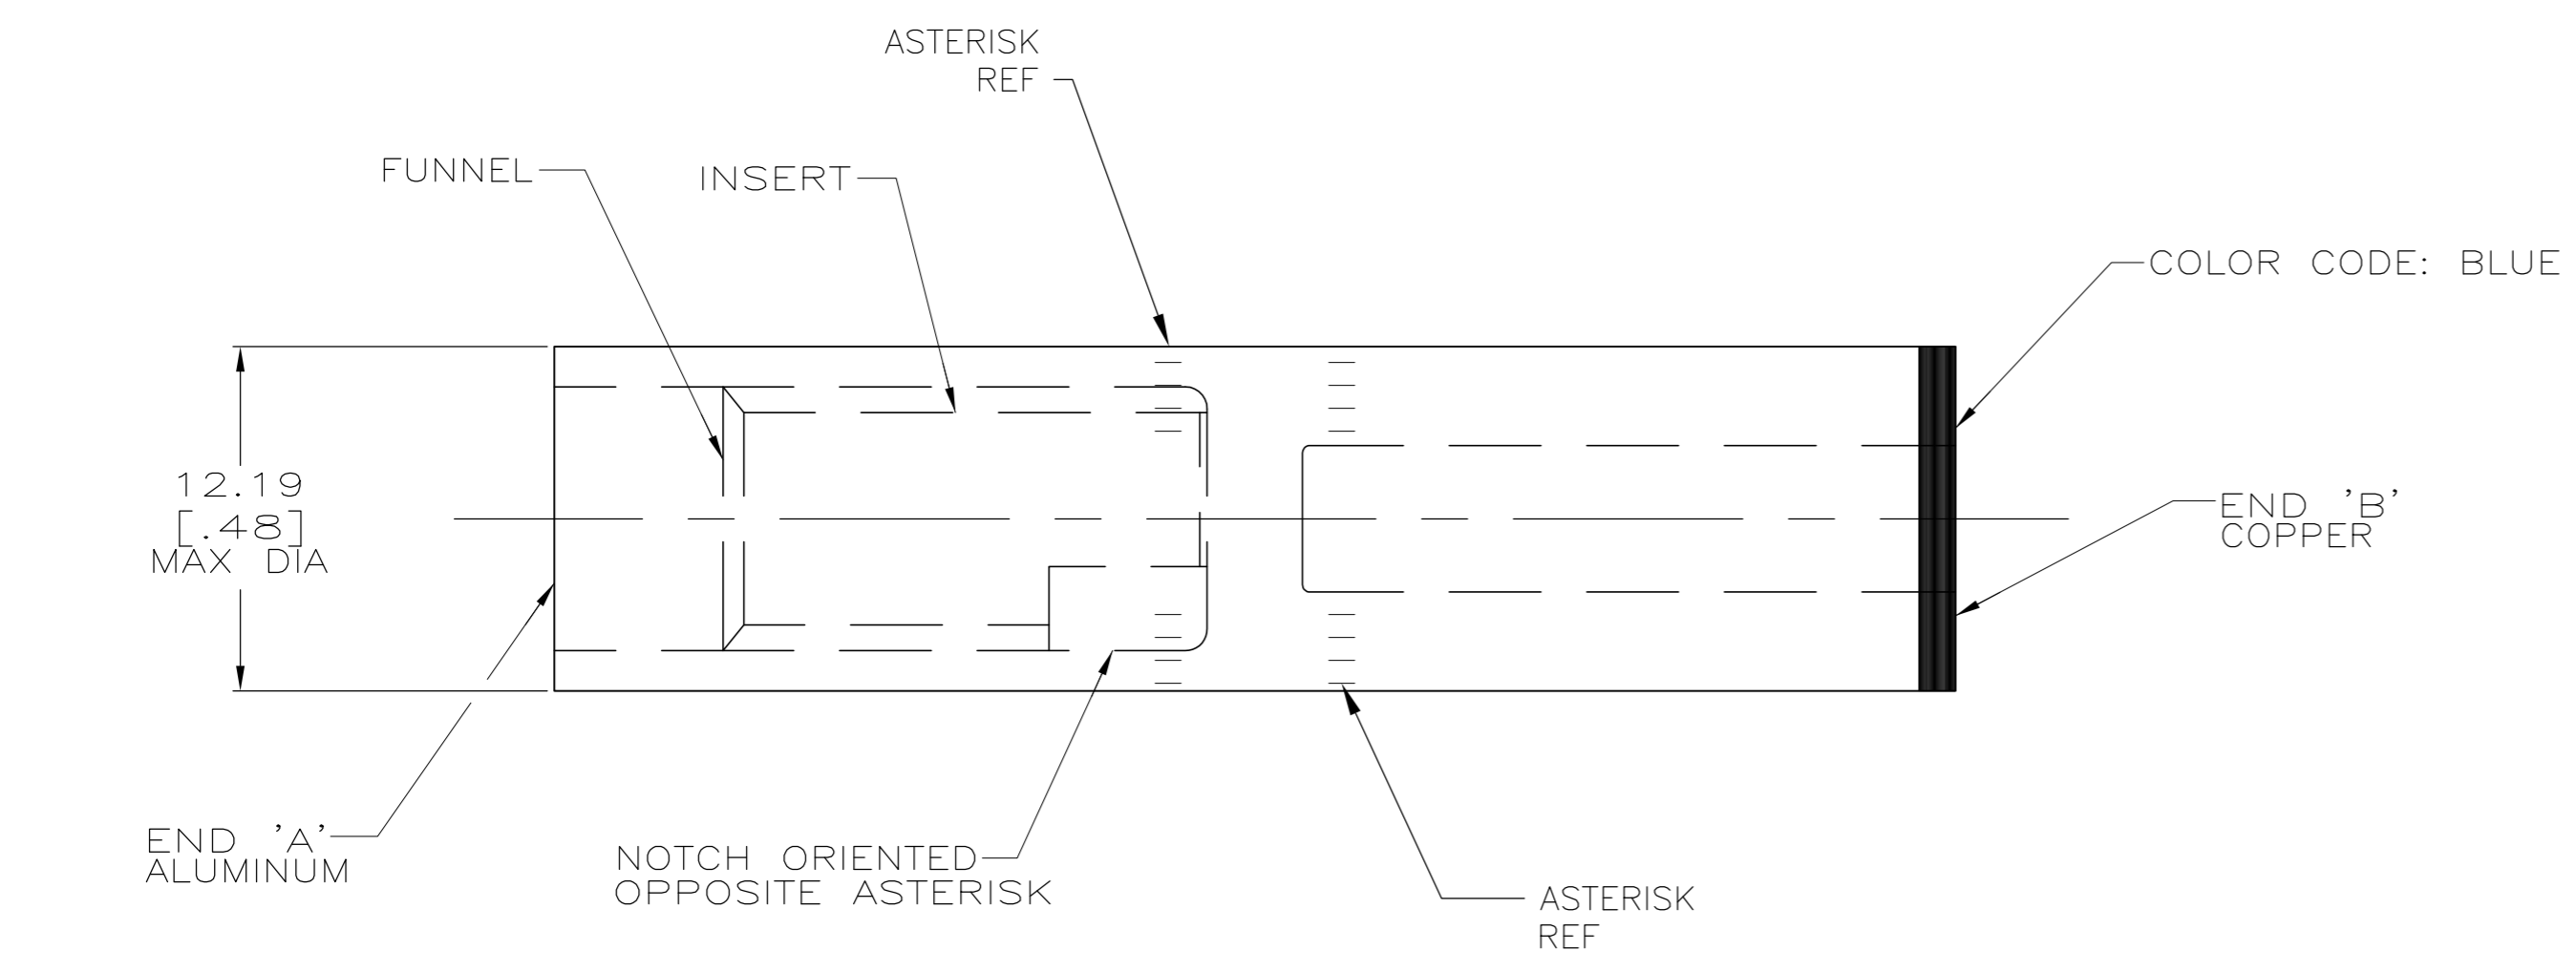

SPLICE: COPPER ASTM B-187 TIN PL PER ASTM B545, 0.00381[.000150] MIN THK INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277164-1
DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DK SCHRUM	7/6/89		TE Connectivity		
DIMENSIONS: mm [ INCHES ]		CHK	MS FEHER	5/1/91		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MJ SPICER	5/1/91		WIRE SPLICE, TRANSITIONAL, COPALUM, SEALED, WIRE SIZE : 21.9mm2 [4] ALUMINUM 8.8mm2 [8] COPPER		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	108-11011-3			SIZE	CAGE CODE	DRAWING NO
MATERIAL SEE TABLE		FINISH	SEE TABLE		WEIGHT	30.9 GRAMS		
		CUSTOMER DRAWING		SCALE	4:1		SHEET 1 of 1	
				RESTRICTED TO	-			

277164