



Electrical specifications

Center Frequency: 2593 MHz
Bandwidth: $F_c \pm 97.0$ MHz
Input / Output Impedance: 50 Ohms
Passband: 2544.5-2641.5 MHz
Passband Insertion Loss: 1.5 dB max
Passband Ripple: 0.5 dB max.
Passband Return Loss: 12.5 dB min
Rejection: 50 dB min. @ 3400 MHz
Rejection 2: 20 dB min. @ 2400 MHz
Rejection 3: 45 dB min. @ 2170 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 10.6 x 8.2 x 4 mm

Environmental

Operating Temperature: -20°C to +70°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

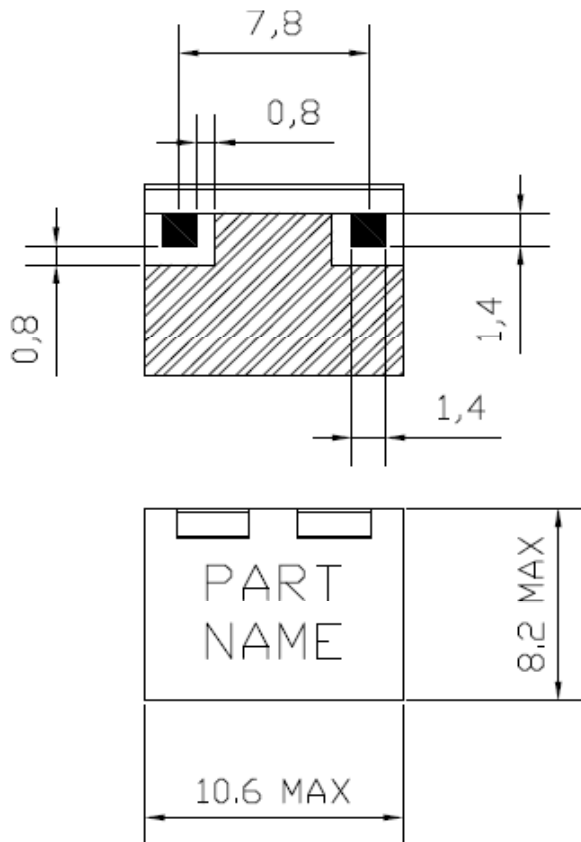

Tolerance unless otherwise specified : ± 0.15

Dimension unit : mm

-  GND
-  PORT