

# Termination resistor - SAC-5P-MINMS TR-DN - 1434701


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



DeviceNet termination resistor, 5-pos., 7/8"-UNF connector



## Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 407 (PC-2011)
GTIN	 4 046356 362511
Custom tariff number	85366990
Country of origin	GERMANY

## Technical data

### General data

Number of positions	5
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 10 \text{ M}\Omega$
Ambient temperature (operation)	-40 °C ... 80 °C (Male connector / female connector)

### General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Insertion/withdrawal cycles	100
Contact material	CuZn
Contact surface material	AU
Contact carrier material	PA 66
Material of grip body	TPU
Sealing material	TPU

### Conductor data

# Termination resistor - SAC-5P-MINMS TR-DN - 1434701

## Classifications

### eclass

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27060307
eCl@ss 6.0	19070403
eCl@ss 7.0	19070403

### etim

ETIM 2.0	EC000448
ETIM 3.0	EC000448
ETIM 4.0	EC000448

### unspsc


UNSPSC 6.01	31251501
UNSPSC 7.0901	32121609
UNSPSC 11	32121609
UNSPSC 12.01	32121609
UNSPSC 13.2	32121609

## Drawings

### Circuit diagram


Contact assignment and wiring of the 7/8" termination resistor

### Schematic diagram



Connector pin assignment for 7/8"-16UNF conn., 5-pos.

### Dimensioned drawing

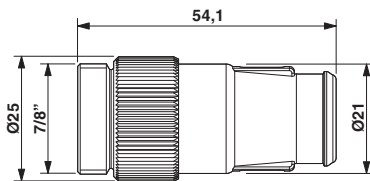

### 7/8" termination resistor