


MATERIAL
POLYAMIDE 4.6 / 1194-V2 AT 0.05MM / CO OR: NATURAL

PERFORMANCE CHARACTERISTICS
OPERATING TEMPERATURE -55°C TO 150°C
INSULATION RESISTANCE 5000 MΩ MIN.
ISLET POTENTIAL 2000 VAC
DURABILITY 500 CYCLES

- NOTES**
- CONNECTOR ACCEPTS TRIM TRIO FORMED, MACHINED AND SUBMINIATURE COAXIAL SOCKET CONTACTS (4x) AND POWER CONTACTS DIAM 2.4 (8x) CONTACTS TO BE ORDERED SEPARATELY. REFER TO TT-CATALOG AND 8P-CATALOGS.
 - RAISED CONTACT MARKING ON BOTH MATING AND WIRING FACE.
 - CONNECTOR DELIVERED WITH MOULD-ON HOODS. HOODS MUST BE CUT AWAY BY CUTTING.
 - CATALOG NUMBER OF SUBSTITUTION: SMS12RD2NA.

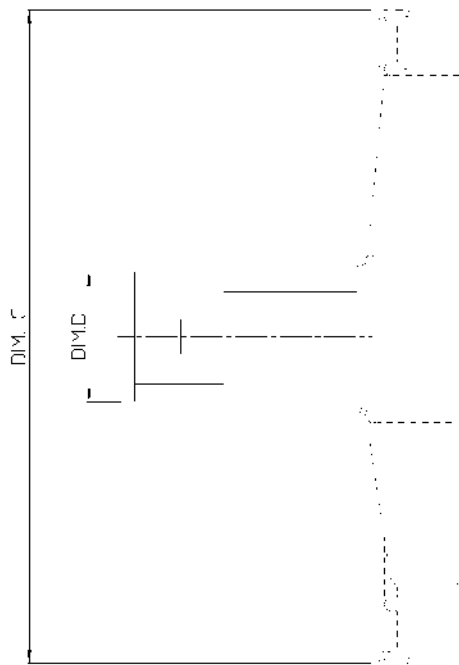

CATALOG NUMBER	QUANTITY OF CONTACT CAVITIES	QUANTITY OF DISCRIMINATION CAVITIES	DIMENSIONS IN MM			
			A	B	C	D
SPS12RD4NA	12 (8+4)	0	40.7	75.1	72.0	16.2

RELEASED FOR TOOLDESIGN

1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN WE RESERVE THE RIGHT TO CHANGE IN PRODUCTION THE SPECIFICATIONS WITHOUT PRIOR NOTICE. ALL DIMENSIONS IN MM ALLE A-ME INGEN IN MM	APPR. DATE SIGN. DRAFT 14 04 95 K.NIEVELT CHECKED: PROD. MGR. PR. ENG. MGR. PR. PGT. MGR.	CIRCULATE RECEPTACLE 12POS. WITH 8POWER CAVITIES CAT. No. SMS12RDH2NA SOURIAU Route Nationale 23 72470 CHAMPAGNE NOT EXPORT CONTROLLED BS.D.202648.002.1B DRAWING NO. 1
	REFERENCES / REFERENTIES	SOURIAU Route Nationale 23 72470 CHAMPAGNE NOT EXPORT CONTROLLED BS.D.202648.002.1B DRAWING NO. 1

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRODUCED, REPRODUCED, REPRODUCED AND
 OR DISTRIBUTED TO A THIRD PARTY, AND USED FOR MANUFACTURE AS A RESULT
 OF OUR WRITTEN CONSENT AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

DIT IS ONZE EIGENDOM EN MAG NIET VERMEERD, HERVOORT, OVERGEHAKT WAN
 DEREN, NIET WORD VERKOPT OF SPREKEND WORDEN, ZONDER ONZE WRITTE
 TOELATING. DIT NIET GEBRUIK IS TOEGESTONDEN VERPLICHT.