


REV. 0
DCO 17004

COIL: @ 25°C	320 OHMS ±10%
RESISTANCE	
NOMINAL VOLTAGE	12.0-15.0 VDC
MUST OPERATE	6.8 VDC
MUST RELEASE	0.68 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ±1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 4 MS MAX.	
CONTACT BOUNCE 2 MS MAX.	

CUSTOMER DATA SHEET

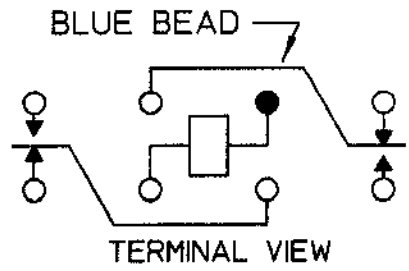

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 5/7/01 CK.TLG 05-08-01



CUST. C.II. STD.	'HFV' RELAY
CUST. NO. _____ REV. _____	

HFV1131B00