


REV. 3 3/7/96

COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX  
 RELEASE 2 MS MAX  
 BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

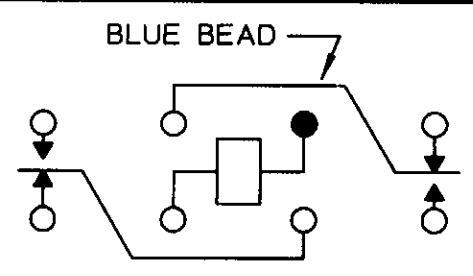

CONTACT RATING:	2A 30 VDC
RESISTIVE	.75A 30 VDC INDUCTIVE
100,000 OPERATIONS	

DR. R.B. 7/17/92 CK. GAH 3-7-96



CUST. HI-G  
 CUST. NO. 2K-2A-126

TYPE "HFW" RELAY

HFW1201S99