

2120337-1 ✓ ACTIVE

MotorMan

TE Internal #: 2120337-1

Cable Seal, Black, -40 – 85 °C Operating Temperature, MotorMan

[View on TE.com >](#)



Connectors > Connector Accessories > Connector Seals & Cavity Plugs



Connector Seal & Plug Type: **Cable Seal**

Primary Product Color: **Black**

Operating Temperature (Max): **85 °C**

Operating Temperature Range: **-40 – 85 °C**

Features

Product Type Features

Connector Seal & Plug Type	Cable Seal
----------------------------	------------

Body Features

Primary Product Color	Black
-----------------------	-------

Dimensions

Compatible Cable Diameter Range	13 – 16.7 mm [.512 – .657 in]
---------------------------------	-------------------------------

Usage Conditions

Operating Temperature (Max)	85 °C
-----------------------------	-------

Operating Temperature Range	-40 – 85 °C
-----------------------------	-------------

Packaging Features

Packaging Quantity	100
--------------------	-----

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability





Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | MotorMan

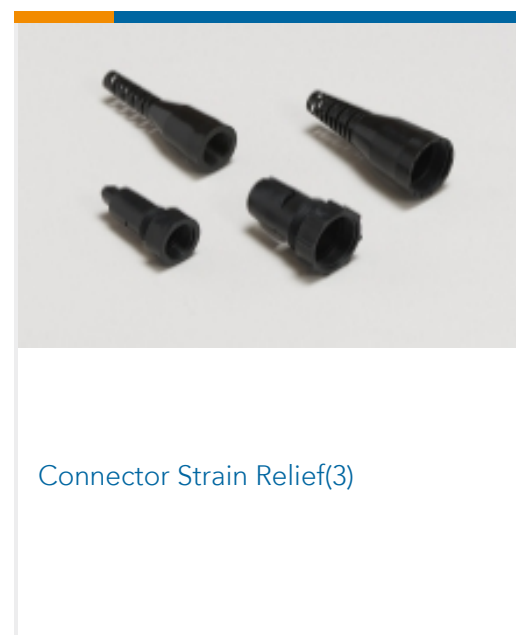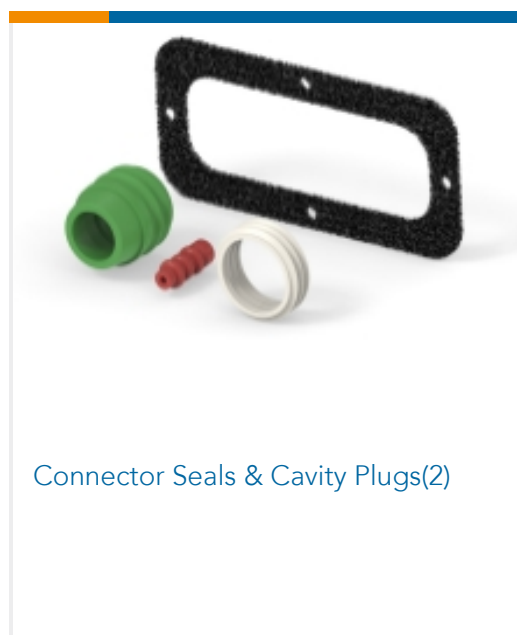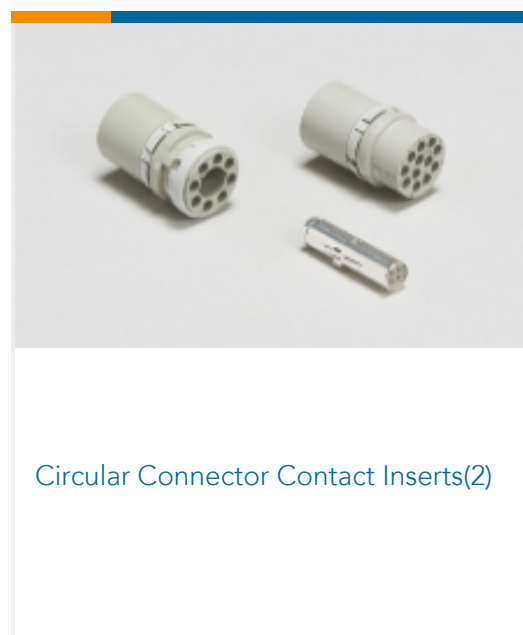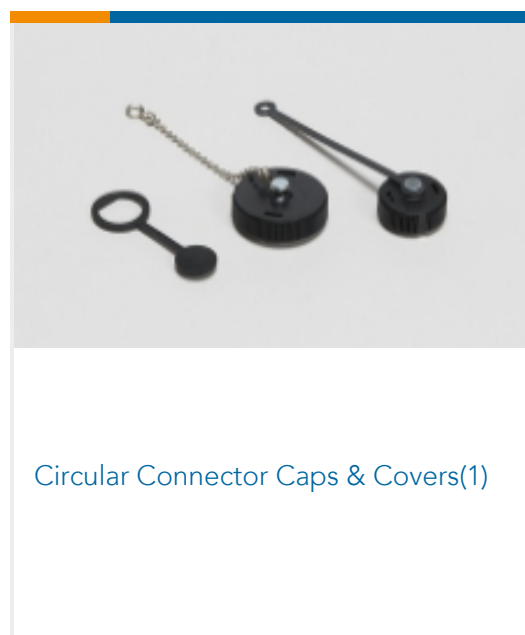



Rectangular Caps & Covers(1)

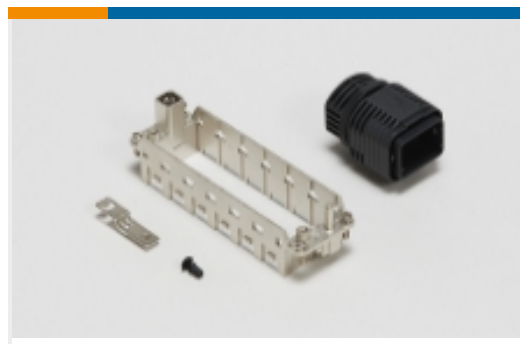

Rectangular Connector Hardware(2)



Rectangular Connector Hoods & Bases (4)



Rectangular Connector Locking(2)



Rectangular Contact Inserts(5)



Rectangular Power Connectors(2)


Customers Also Bought



TE Part #2-292173-3
CT BOX HDR H SMT 3P O/TAPE BLA



TE Part #5-747905-2
9 Rcpt Solder Cup, Gold Flash,

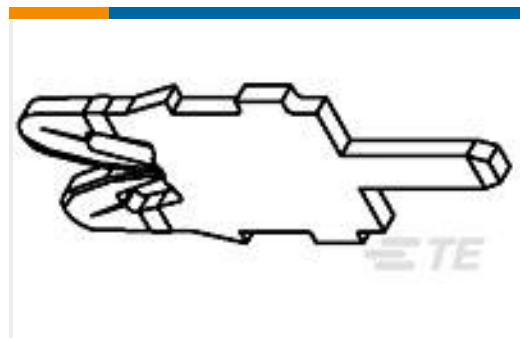

TE Part #4-1601041-3
PC TAB STANDARD SIAMEZE



TE Part #1-188685-2
STD TIMER PCB CONTACT



TE Part #2301995-3
RJ45 JACK INT.MAG. 10/100 LED 1X1
VERT.



TE Part #6-1393048-5
RESOLVER V23401-U7018-B709

Documents

[Product Drawings](#)
[SINGLE WIRE SEAL](#)

English

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_2120337-1_E_c-2120337-1-e.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_2120337-1_E_c-2120337-1-e.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2120337-1_E_c-2120337-1-e.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.