BGA Heat Sink - High Performance maxiFLOW w/Thermal Tape





ATS Part#: ATS-52425G-C1-R0

Description: 42.50 x 42.50 x 12.50 mm BGA Heat Sink - High Performance maxiFLOW w/Thermal

Tape

Heat Sink Type: maxiFLOW Heat Sink Attachment: Thermal Tape

Equivalent Part Number: ATS-52425G-C2-R0


Features & Benefits

- maxiFLOW™ design features a low profile, spread fin array that maximizes surface area for more effective convection (air) cooling
- Fabricated from extruded aluminum, which minimizes thermal resistance from the base to the fins, reduces weight and keeps costs low
- Higher performance helps ensure reliable product life at a lower cost than other extruded heat sinks

Thermal Performance

AIR VELOCITY		@200 LFM 1.0 M/S	@300 LFM 1.5 M/S	@400 LFM 2.0 M/S	@500 LFM 2.5 M/S	@600 LFM 3.0 M/S	@700 LFM 3.5 M/S	@800 LFM 4.0 M/S
THERMAL RESISTANCE	Unducted Flow	2.4 °C/W	1.9 °C/W	1.7 °C/W	1.5 °C/W	1.4 °C/W	1.3 °C/W	1.2 °C/W
	Ducted Flow	2	N/A	N/A	N/A	N/A	N/A	N/A

Product Detail

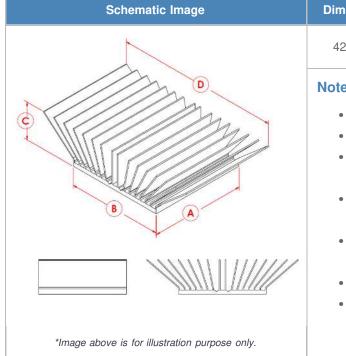

Dimension A	Dimension B	Dimension C	Dimension D	TIM	Finish
42.50 mm	42.50 mm	12.50 mm	72.84 mm	T412	BLUE-ANODIZED

Notes:

- Dimension A and B refer to component size.
- Dimension C is the heat sink height from the bottom of the base to the top of the fin field.
- ATS-52425G-C2-R0 is the exact heat sink assembly with an equivalent thermal interface material (Saint-Gobain C675).
- Thermal performance data are provided for reference only. Actual performance may vary by application.
- ATS reserves the right to update or change its products without notice to improve the design or performance.
- ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.
- Contact ATS to learn about custom options available.

For more information, to find a distributor or to place an order, please contact us at 781-769-2800 (North America), sales@qats.com or www.qats.com.



^{*}Image above is for illustration purpose only.