


SHIELDED

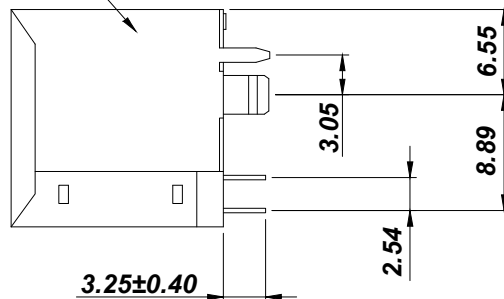

NOTES:

MATERIAL

- 1.Housing : PBT Glass Filled,UL94V-0,Black
- 2.Spring Wire: Phosphor Bronze,Ø=0.35mm ,
- ① Selective plating: 6u" Gold on mating contact, Sn on soldering contact
- 3.Shielded: Brass plating Ni


ELECTRICAL

- 1.Current Rating : 1.5A Max
- 2.Rating Voltage : 120V AC
- 3.Contact Resistance : 20mΩ max
- 4.Insulation Resistance: 500MΩ min
- 5.Dielectric Voltage : 1000V RMS 60Sec. Min.


ENVIRONMENTAL

- 1.Temperature Range: -40°C to +85°C
- 2.Durability: 500 cycles Min
- 3.Soldering Temperature: +235°C

Package: Tray

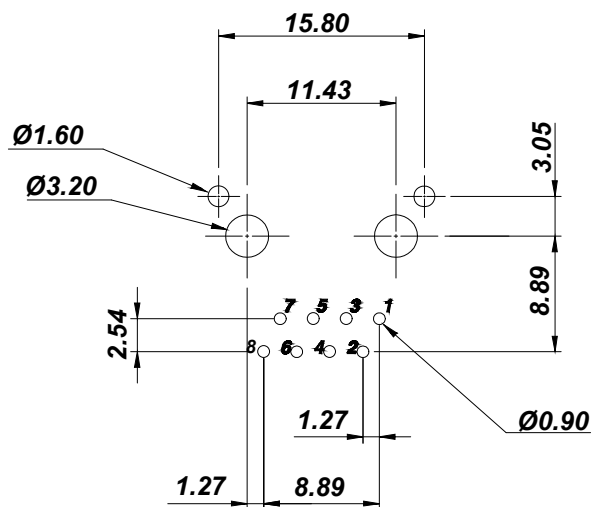

PCB Layout
(Top View)

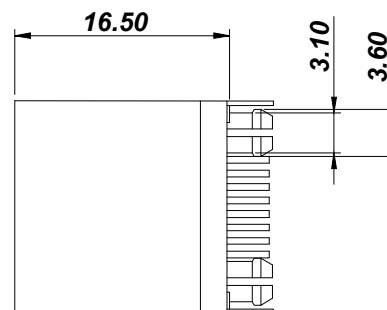

RoHS compliant

Unit:mm

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X.°	± 3°
Angle	TOL

①	Update	26.10.2020	Daniel
②	Drawn	22.12.2011	Chappell
Id.	Modification	Date	Name



Description:		Modular,RJ45,1.27mm,8pin THT,180°,Au6u"/Sn,tray	
ASSMANN WSW-No.		A-2014-2S-4-N-R	
Drawing-No.		ASS 7330 CO	rev01
Customer-No.		SHEET 1 / 1	

G	RoHS compliant	Scale	Free					Date	Name	Description:		
		TOLERANCE					Drawn	22.12.2011	Chappell		Modular,RJ45,1.27mm,8pin THT,180°,Au6u"/Sn,tray	
		X.X	±0.40				Approved	26.10.2020	Daniel			ASSMANN WSW-No.
H	Unit:mm	X.XX	±0.25							A-2014-2S-4-N-R		
		X.XXX	±0.15									
		DIM	TOL	①	Update	26.10.2020	Daniel	ASSMANN WSW components		Drawing-No.	ASS 7330 CO	rev01
		X.°	± 3°	②	Drawn	22.12.2011	Chappell			Customer-No.	SHEET 1 / 1	
		Angle	TOL	Id.	Modification	Date	Name					