


DIMENSIONS mm (inches)

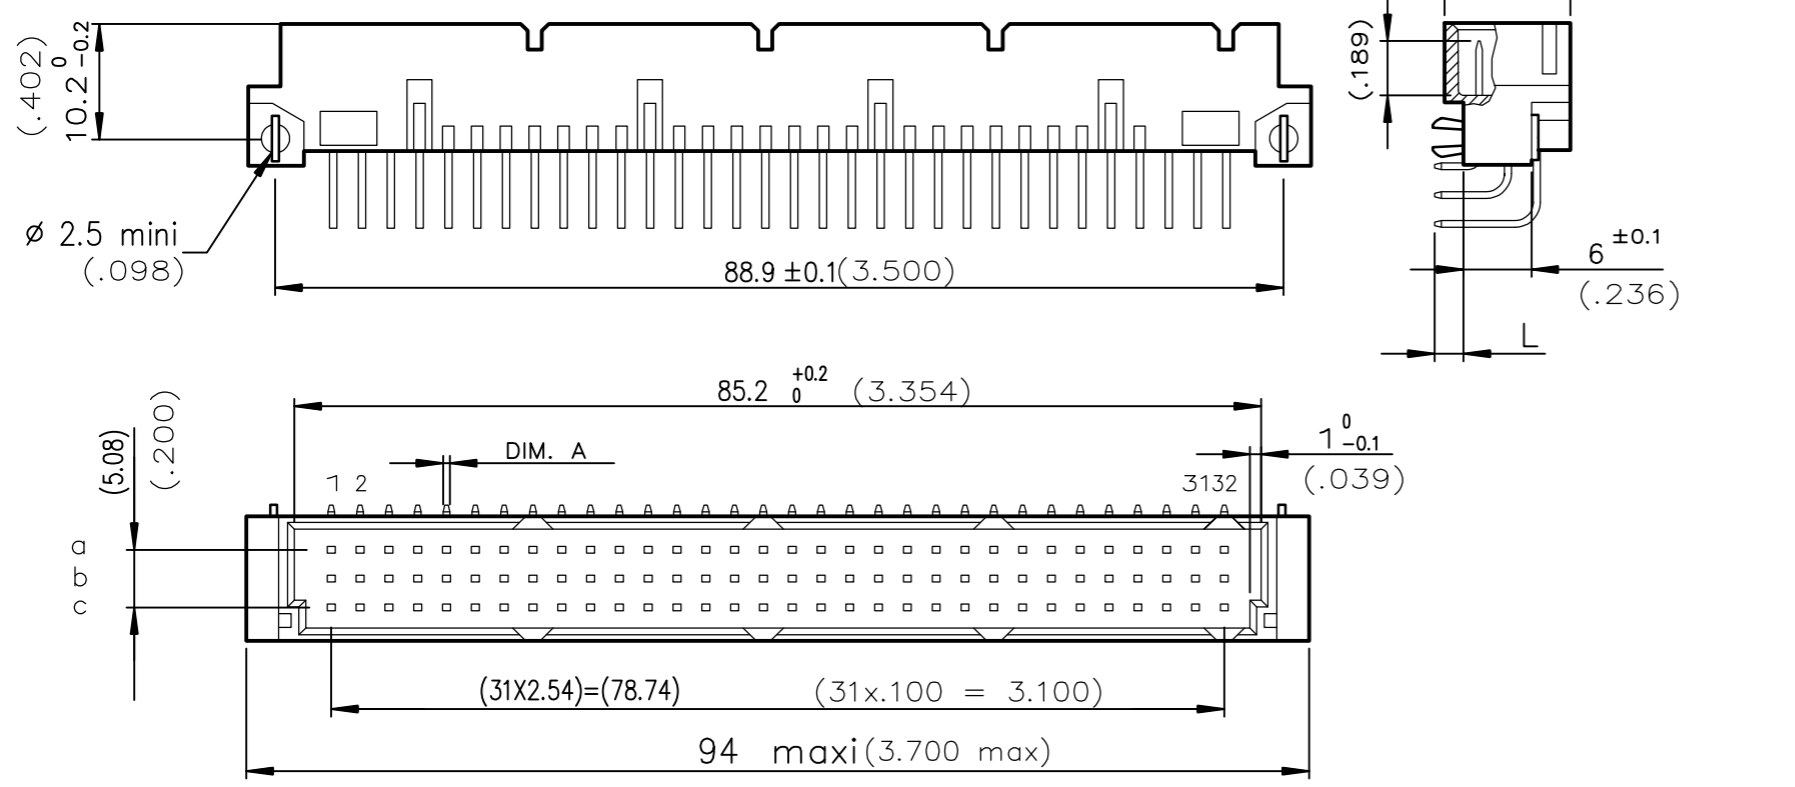

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
 SEE DRAWING C-8609-0000A

TIN LEAD	LEAD FREE	
8609 396 71 13 755 000 E1	8609 396 71 13 755 E1 LF	Style C header, 96 Position, solder to board, class 2
8609 396 71 13 765 000 E1	8609 396 71 13 765 E1 LF	Style C header, 96 Position, solder to board, class 1
8609 396 71 13 H55 000 E1	8609 396 71 13 H55 E1 LF	Style C header, 96 Position, solder to board, class 2, fixing clips
8609 464 71 13 755 000 E1	8609 464 71 13 755 E1 LF	Style C header, 64 Position, solder to board, class 2
8609 464 71 13 765 000 E1	8609 464 71 13 765 E1 LF	Style C header, 64 Position, solder to board, class 1
8609 464 71 13 H55 000 E1	8609 464 71 13 H55 E1 LF	Style C header, 64 Position, solder to board, class 2, fixing clips
TIN LEAD	LEAD FREE	
8609 396 71 13 745 000 E1	8609 396 71 13 745 E1 LF	Style C header, 96 Position, solder to board, class 3
8609 396 71 13 H45 000 E1	8609 396 71 13 H45 E1 LF	Style C header, 96 Position, solder to board, class 3, fixing clips
8609 396 71 13 H65 000 E1	8609 396 71 13 H65 E1 LF	Style C header, 96 Position, solder to board, class 1, fixing clips
8609 464 71 13 745 000 E1	8609 464 71 13 745 E1 LF	Style C header, 64 Position, solder to board, class 3
8609 464 71 13 H45 000 E1	8609 464 71 13 H45 E1 LF	Style C header, 64 Position, solder to board, class 3, fixing clips
8609 464 71 13 H65 000 E1	8609 464 71 13 H65 E1 LF	Style C header, 64 Position, solder to board, class 1, fixing clips

Application specific part-numbers: See sheet 2

www.fciconnect.com

surface ISO 1302 ✓ tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	ROUILLARD	1992/05/05	ANGULAR	LINEAR	0.X	±0.1	projection	mm	
Eng	TARON	1992/05/05			0.XX	±0.1			
Chr	M JACOB	2021/08/05	0.XX' ±2'		0.XXX	±0.1	size	Scale	
Appr	SANOJ	2021/08/05					A3	1:1	
Product family							DIN 8609	ECN	ELX-I-41919
							Spec ref	-	

RIGHT ANGLE HEADER - STYL
 SOLDER TO BOARD

Rev. G


dwg no C-8609-0250

catalog no - CUSTOMER sheet 1 of 2

Copyright AFCI. Amphenol FCI

PART NUMBER		8609			71				5	
PIN OUT										
rows a-b-c		-----	3	96						
rows a-c		-----	4	64						
rows a		-----	1	32						
NUMBER OF CONTACTS										
TERMINATION										
L = 2.75 ±0.15 (.108)	A = $\phi 0.6$ ⁰ -0.08	B = $\phi 0.08$ ^{+0.3} 0		13						
L = 4.15 ±0.15	A = 0.6X0.6	B = $\phi 1 \pm 0.1$		23						
OPTIONS										
no option									7	
with harpoons									H	
PERFORMANCE CLASS										
DIN 41612 class 3									4	
DIN 41612 class 2									5	
DIN 41612 class 1									6	
TERMINATION TYPE										
TIN LEAD										000E1
LEAD FREE										E1LF

PCB DRILLING

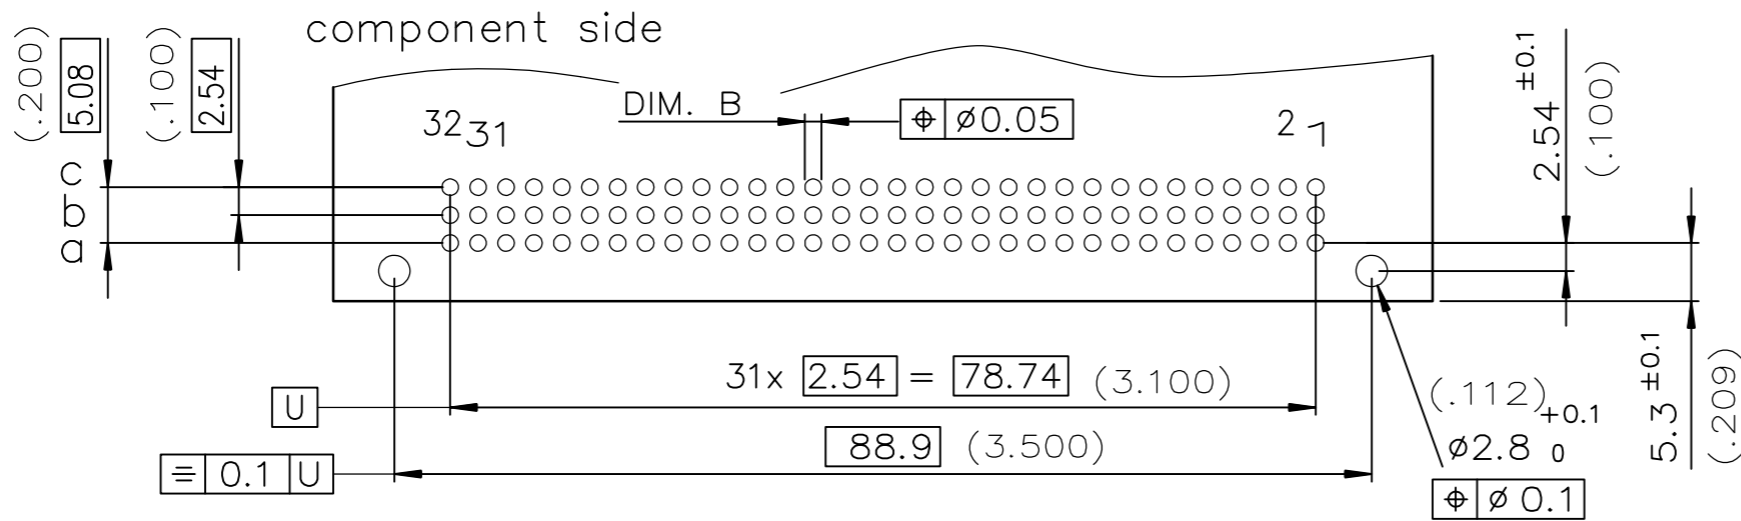

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

Copyright AFci. Amphenol FCI

rev	ecn no	dr	date
C	-	LEL	2002/08/28
D	LS05-001	JTA	2005/03/02
E	LS05-0056	LGO	2005/06/21
F	LS06-0097	LGO	2006/07/11
G	ELX-I-41919	SA	2021/08/05
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	ROUILLARD	1992/05/05	ANGULAR	0.X ±0.1
Eng	TARON	1992/05/05	LINEAR	0.XX ±0.1
Chr	M JACOB	2021/08/05	0.XX ±2	0.XXX ±0.1
Appr	SANOJ	2021/08/05	Product family	
			DIN 8609	
title RIGHT ANGLE HEADER - STYL SOLDER TO BOARD				size A3
catalog no				scale 1.5
				ECN ELX-I-41919
				Spec ref -
			dwg no C-8609-0250	Rev. G
			CUSTOMER	sheet 2 of 2