
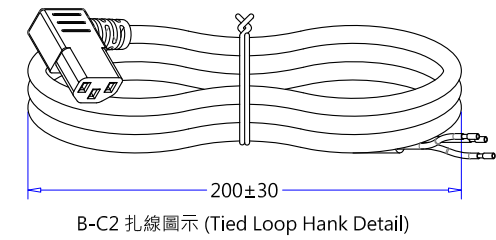
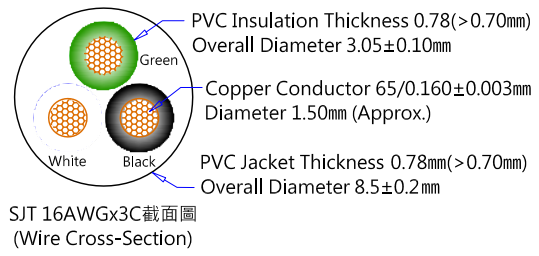
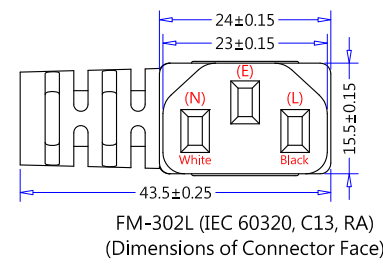


| 插頭部件 (Plug Component) |   |      | 頭部剥皮尺寸 (Dimensions)           |          |            | 線材規格 (Wire Styles)  |          | 尾部剥皮尺寸 (Dimensions) |   |   | 端子規格 (Terminal Style) |  |
|-----------------------|---|------|-------------------------------|----------|------------|---|----------|---------------------|---|---|-----------------------|--|
| 顏色 (Color)            | 零件描述 (Component)  | Qty. | 內剥 (Strip)                    | 外剥 (ROJ) | 顏色 (Color) | SJT 16AWGx3C<br>105°C 黑色 (Black)<br>Length : 2000±50 (79"±2") | 外剥 (ROJ) | 內剥 (Strip)          | 顏色 (Color)  | 規格描述 (Instruction)                                  | 端子編號 (Style No.)      |  |
| 35P 黑色 (Black)        | FM-302L (IEC 60320, C13)                                  | 1    | 6 <sup>+1</sup> <sub>-0</sub> | 18 ± 2   | 黑/Black(L) |   | 50.8±5   | 6.35±3              | 黑/Black(L)  | 絕緣依尺寸剥除, 留膠於線上 (Strip and Retain Outside Insulated) |                       |  |
| 銅本色 (Brass-Natural)   | 2.0*4.0 方管端子 (GEM 98752A-0) (2.0*4.0 Receptacle Terminal) | 3    | 6 <sup>+1</sup> <sub>-0</sub> | 18 ± 2   | 白/White(N) |   | 50.8±5   | 6.35±3              | 白/White(N)  | 絕緣依尺寸剥除, 留膠於線上 (Strip and Retain Outside Insulated) |                       |  |
| 米白色 (Off-White)       | GA005-5 品字母插兩件式內模 (Computer 2x4 Serial Housing)           | 1    | 6 <sup>+1</sup> <sub>-0</sub> | 18 ± 2   | 綠/Green(E) | 50.8±5  | 6.35±3   | 綠/Green(E)          | 絕緣依尺寸剥除, 留膠於線上 (Strip and Retain Outside Insulated) |   |                       |  |

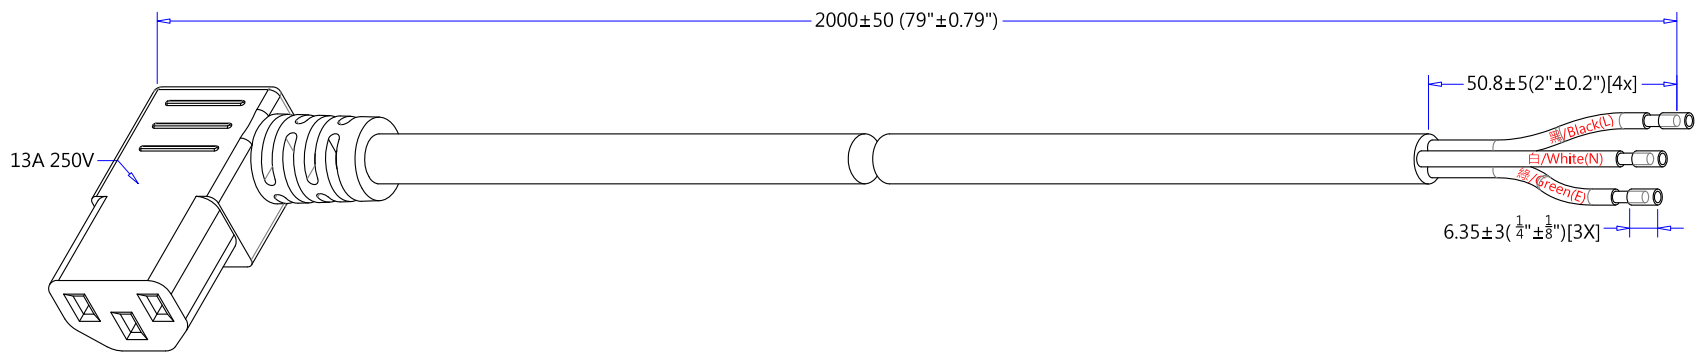

| REV | DATE       | REVISE CONTENT                           |
|-----|------------|--|
| A   | 08/29-2012 | The first edition is issued and drawing. |
| F   |            |  |
|     |            |  |

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
  - Insulation Resistance Test : DC 500/min >100 meg-ohm.
  - Continuity & Polarization Test : No short circuit, break circuit, displacement.
  - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
  - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
  - All material according to Non-toxic standard.(Material must be RoHS compliant.)
  - "FMC" logo maybe present on C13.

|                     |                                     |            |   |   |  |   |  |
|---------------------|-------------------------------------|------------|---|---|--|---|--|
| 線材印字 (Wire Printed) | 充實, 油墨印字 (Un-Fillers, Printing Ink) |            |   | <b>CnC Tech, LLC</b><br>Industrial Cable and Connector Technology |  |   |  |
| 包裝方式 (Packing)      |                                     | DRAWN      |   |   |  |   |  |
| Tied Hank           | See Hank Detail                     | Chu8.      |   | P/N No. 800-1603-2-SJT0-BL-00200                                  |  |   |  |
| Carton Size         | 480 x 320 x 250                     | DATE       |   |   |  | MATERIAL PVC UNIT mm<br>Customer Approval |  |
| Pack Number         | 100pcs/                             | 08/29-2012 |   |   |  |   |  |
| Carton Print        | See Purchase Order                  | TYPE       |   | IEC 60320, C13 RA to ROJ(S&R) Power Supply Cord                   |  |   |  |
| DRAWING NO.         | 098MM981                            | REV        | A |   |  |   |  |

業務校閱： 品質校閱：