SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REDUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8 VDE APPROVED: EN 133 200

DPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREQUENCY:

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

9.6 µA **@** 120V 60Hz 16.6 µA **@** 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS:

100 - To $I_0 = I_r$ 60

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDZ

CUSTOMER DRAWING CATALOG # 15SRB1-R TAPPRVD. DATE PJD 02MAY07

TEST SPECIFICATIONS:

INDUCTANCE: N/A mH CAPACITANCE: (MEASURED @ IKHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: LINE TO LINE: 100pF ± 20% N/A

DISCHARGE RESISTOR: N/A

L/G AND L/L I.R.

ND DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPDT:

LINE TO GROUND: 1500 VAC FOR I MINUTE LINE TO LINE: 1450 VDE FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND DUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

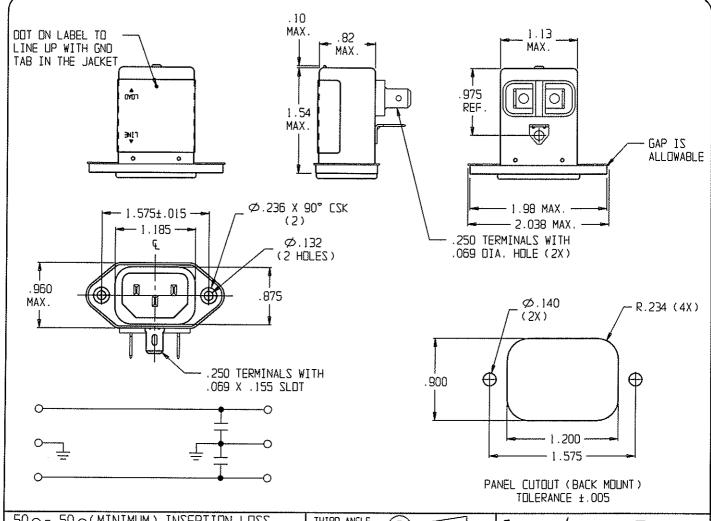

<u>50n-</u>	50 <u>~</u> (MINIM	∐M) II	<u> </u>	<u> IN LOS</u>	S	
FREGUENCY MH2	1.0	5.0	10	50	100	300	}
CDMMON d8	/	/	/	3	Б	22	1
DIFF. dB	/	/	/	/	/	/	

THIRD ANGLE PROJECTION	\bigcirc	
LINLESS OTHE		,
TOLERANCE T	11.4 MH 11	/ 5

MATERIAL & FINISH: AS SUPPLIED

This document is proprietory to CORCOM IN and is not to be reproduced nor used for nanufacturing purposes except on EDREBH'S prior written consent.

Electronics COFCOM

POWER LINE FILTER

r	CAD FILE: G: V		TYCD # 4-6609987-7	
-	SCALE: 75.		CAYALOG NO.	REV.
: I	DRW. RY:	18JAN06	15SRB2-R	اما
'	100 SD	UK16: P.ID	100KD4"K	V
			•	