


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3		2		1		
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EUR CHECK	Applicable Tooling			
1	See Table 1	XAF CONNECTOR			BCD			
2	UL10002, 22 AWG	BLACK			TABLE 1			

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XAF-2S	A02XAF02XAF22K305A	609.6
1	3	03XAF-2S	A03XAF03XAF22K305A	914.4
1	4	04XAF-2S	A04XAF04XAF22K305A	1,219.2
1	5	05XAF-2S	A05XAF05XAF22K305A	1,524.0
1	6	06XAF-2S	A06XAF06XAF22K305A	1,828.8
1	8	08XAF-2S	A08XAF08XAF22K305A	2,438.4
1	10	10XAF-2S	A10XAF10XAF22K305A	3,048.0
1	20	20XAF-2S	A20XAF20XAF22K305A	6,096.0

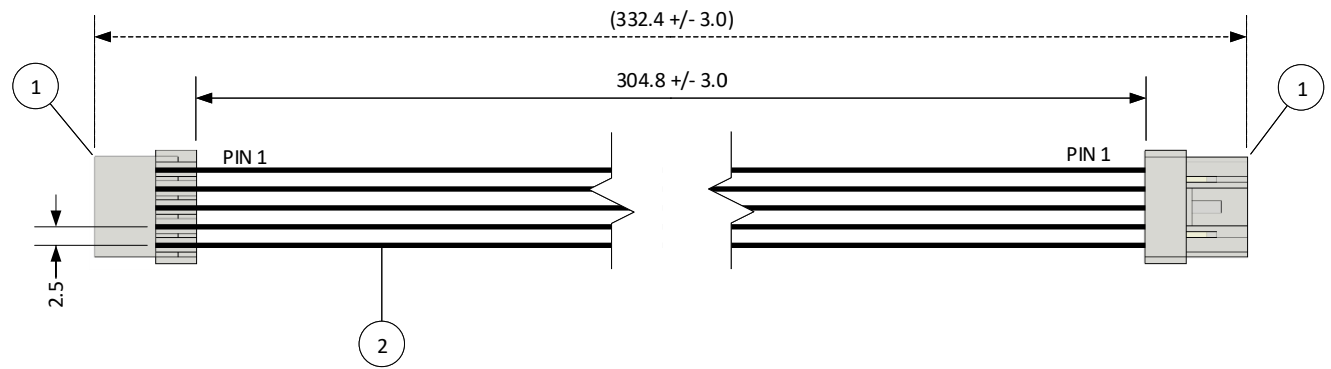

Electrical Specifications	
Current: 3.0A AC/DC	
Voltage: 150V AC/DC	



SCALE	1:1	
DIMENSIONS	All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	
DRAWN BY	CUSTOMER NAME	CUSTOMER PART NO.
CHECKED BY	DESCRIPTION	ASSEMBLY PART NO.

1	Add electrical specifications	6/27/2018	SP
REV.	DESCRIPTION	DATE	BY

4		3		2		1		
DRAWING NO. & REVISION		GAM-039		REVISED		3/7/2016		