



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00003	Overmold, PVC, black	1	

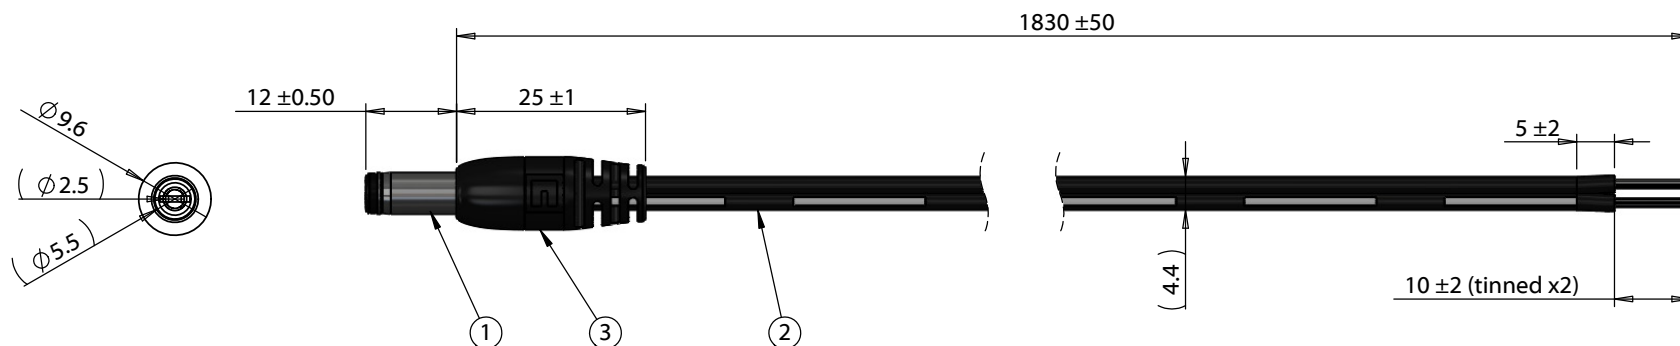

**Notes:**  
Functionally equivalent components may be substituted  
Cable rated for 48 V, 8 A

Wiring diagram	
50-00026	Wire Color
Center	Black with stripe
Sleeve	Black

Revision:	Date:	Description:	Prepared: <b>AW</b> <small>Digitally signed by AW Date: 2019.10.25 09:58:48 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	06/28/2012	Initial release	Verified: <b>PS</b> <small>Digitally signed by PS Date: 2019.10.25 16:14:25 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 1830 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 18 AWG, 30-00007 wire	
				Size:	Part number:
				A	10-01060
				Scale: 1:2	
				Sheet 1 of 1	

5

↑

4

3

2

1