

Mini-Com® MuTOA Outlet Box

specifications

MuTOA Outlet Box is a multi-user telecommunication outlet assembly that provides multimedia flexibility to open office environments. The expandable cable entry shall increase compatibility with various cable diameters that shall be secured in place by cable ties or heat shrink tubing. Mounting options shall consist of adhesive tape or screws. Two mounting eyelets shall help suspend the box in areas with limited wall surfaces. Product shall deliver up to 6-ports for Category 5e and Category 6 and up to 4-ports for Category 6A when used with ½ sloped inserts.



technical information

Dimensions:	7.90"H x 1.81"W x 2.36"D (200.7mm x 46mm x 59.9mm) – with inserts
Mounting options:	Adhesive tape, mounting eyelets, or screws Screw holes spaced 4.70" (screws not supplied by Panduit)
Material:	Polycarbonate
Packaging:	Two cable ties, heat shrink tubing, adhesive tape, screws to secure cover to base

key features and benefits

Modularity	Accepts all Mini-Com® Modules for copper, fiber and A/V applications; modules snap in and out for easy moves, adds and changes
Expandable cable entry	Compatible with a variety of cable types and bundle sizes Opening will adjust from 0.695" (17.7mm) to .825" (21mm)
Mounting options	Mounts easily with adhesive tape or screws (not supplied by Panduit)
Mounting eyelets	Helps suspend the box in areas with limited wall space
Cable tie support slot	Facilitates quicker assembly and contributes to lower installed cost

applications

The Mini-Com® MuTOA Outlet Box is ideal for open office environments that require design flexibility or experience frequent reconfigurations. It can be used in conjunction with pre-assembled cable runs that have been previously tested and labeled allowing faster, more economical and more reliable installations.

The Mini-Com® MuTOA Outlet Box will accept up to three ½-sized sloped inserts, shuttered or non-shuttered (sold separately). Various mounting options provide installation flexibility for frequent office reconfigurations or challenging environments.

Mini-Com® MuTOA Outlet Box

Black:	CM6PBL
Off White:	CM6PIW

Mini-Com® Inserts (sold separately)

Sloped insert:	CHS2*-X
Sloped shuttered insert:	CHS2S*-X

Mini-Com® Copper Jack Modules

Category 6A:	CJ6X88TG^
Category 6:	CJ688TG^
Category 5e:	CJ5E88TG^

Mini-Com® Shuttered Copper Jack Modules

Category 6A:	CJH6X88TG^
Category 6:	CJH688TG^
Category 5e:	CJH5E88TG^

Lable Options:


Laser/ink jet:	C125X030FJJ
TDP43ME:	C125X030YPT
Panther™ LS8E:	C125X030FJC

*To designate color, replace * with suffix
BL (Black), IW (Off White).

^To designate color, replace ^ with suffix
AW (Arctic White), BL (Black), BU (Blue),
EI (Electric Ivory), GR (Green),
IG (International Gray), IW (Off White),
OR (Orange), RD (Red), VL (Violet),
WH (White), YL (Yellow).

Add -24 to end of part number to designate a package of 24 jack modules.

Mini-Com[®] MuTOA Outlet Box

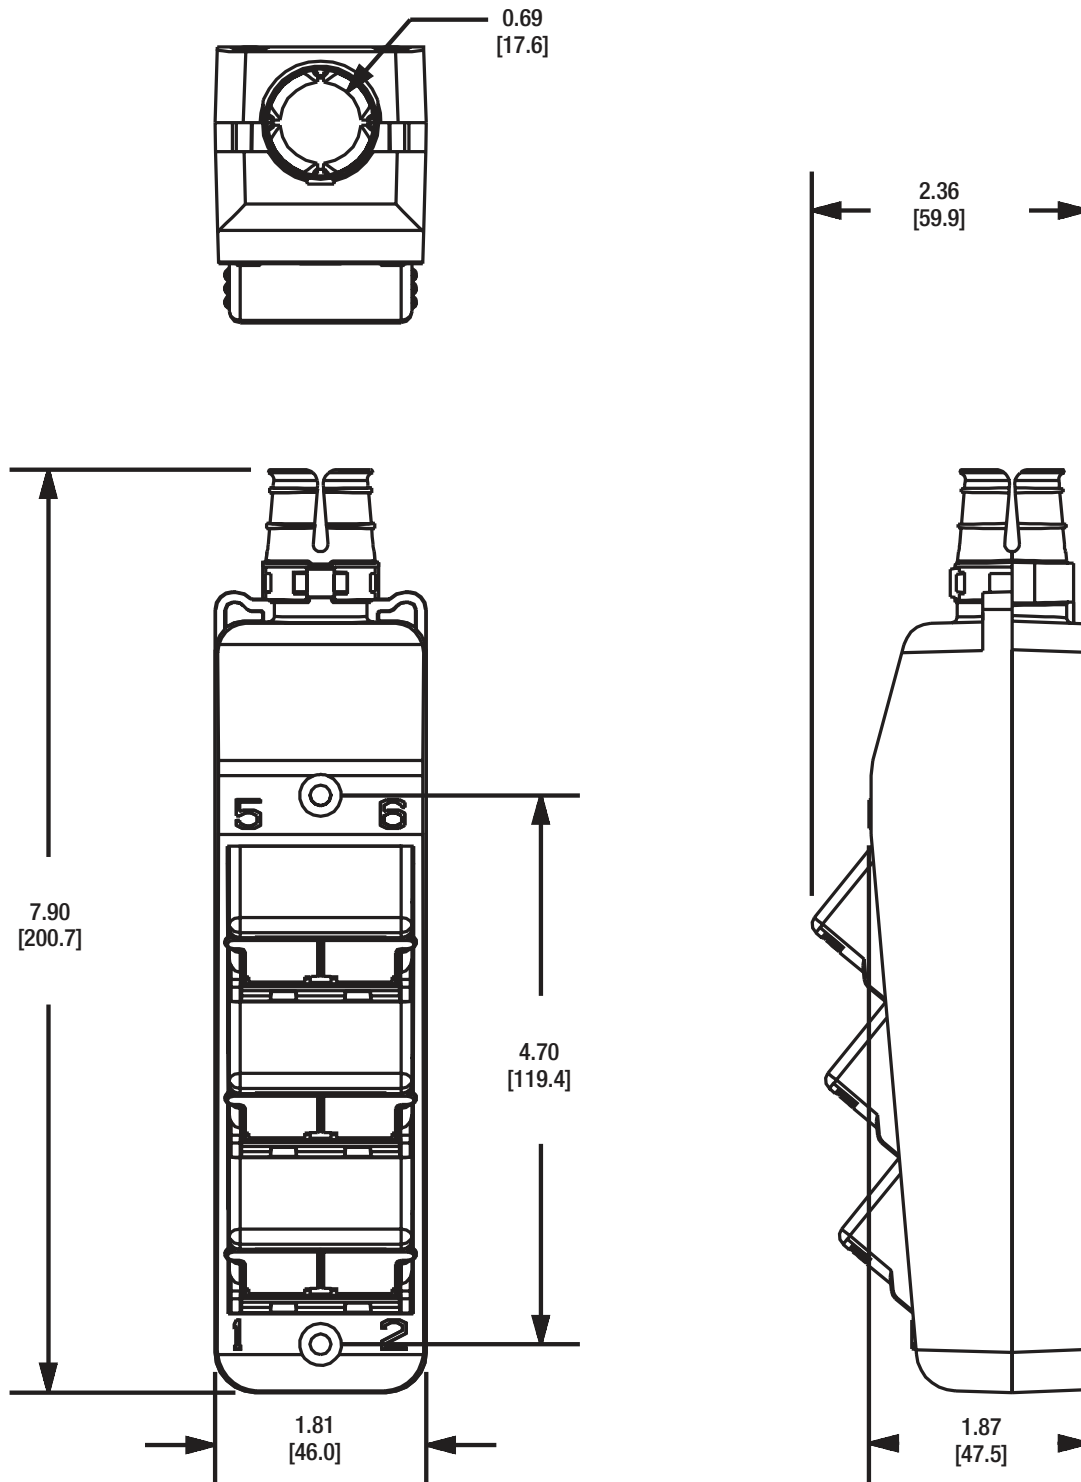

NOTE: Sloped inserts not included.
 Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
 Phone: 800.777.3300

PANDUIT EUROPE LTD.
 London, UK
 Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
 Republic of Singapore
 Phone: 65.6305.7575

PANDUIT JAPAN
 Tokyo, Japan
 Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
 Guadalajara, Mexico
 Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
 Victoria, Australia
 Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com
 Contact Customer Service by email: cs@panduit.com
 or by phone: 800.777.3300

© 2021 Panduit Corp.
 ALL RIGHTS RESERVED.
 OTSP34--WW-ENG
 Replaces SA-NCSP15
 9/2021