

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C2	REVISED PER ECO-17-008114	07JUN2018	RS	DR

<b>AMP</b> WIRE RANGE	E13288 Listed	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

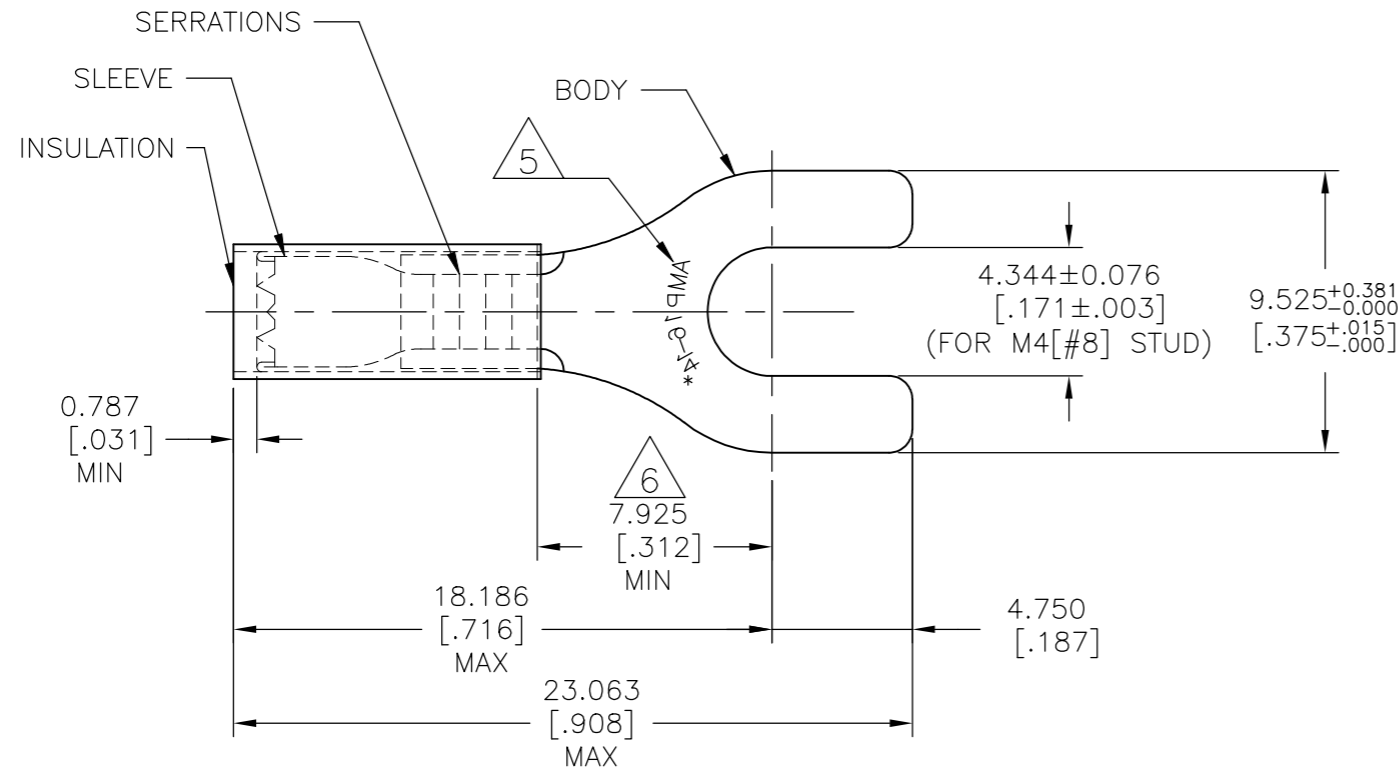

- 1 BODY MATERIAL THK: 0.787±0.051[.031±.002]
- 2 FOR 2.921 TO 4.318[.115 TO .170] WIRE INSULATION DIA
- △3 MATERIAL:  
BODY & SLEEVE: COPPER PER ASTM B152  
INSULATION: NYLON
- △4 FINISH:  
BODY & SLEEVE: TIN PL PER ASTM B545  
INSULATION: COLOR - BLUE
- △5 STAMP AMP 16-14\* APPROX AS SHOWN
- △6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD

100	LOOSE PC, BOX	8-32059-1
1000	LOOSE PIECE	32059
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 07JUN2018  
RAVI S

CHK 07JUN2018  
ROHDE DANIEL F

APVD 07JUN2018  
ROHDE DANIEL F

PRODUCT SPEC

UL 486 A-B

APPLICATION SPEC

114-2157

WEIGHT

CUSTOMER DRAWING



TE Connectivity Ltd.

NAME  
WIRE TERMINAL, P.I.D.G. - SPADE  
WIRE SIZE : 16-14 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-32059	-

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] VOLTAGE RATING: 300 V MAX
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 1.04-2.62mm²[2,050-5,180] CIR MILS SOLID OR STRANDED

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± 5'
MATERIAL △3	FINISH △4

SCALE	SHEET	REV
NTS	1 OF 1	C2