

Unit: mm

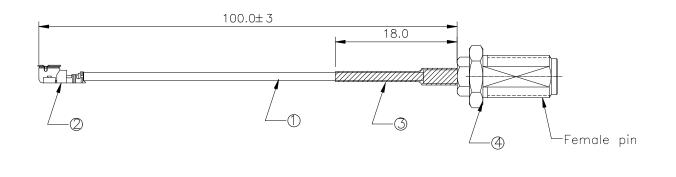

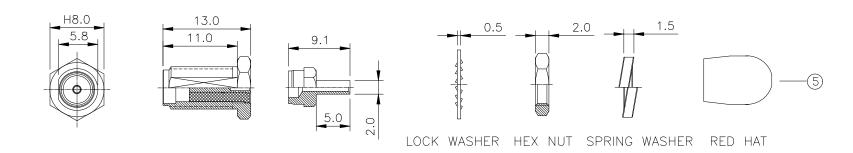

ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr,open circuit short circuit test.

2.Conductive resistance: 20Ω

3.Rated voltage: AC 60V

4. Withstand voltage: AC 200V 5.Insulation resistance:500m Ω

6.characteristic impedance: 50Ω

7.Adopt environmental protection process and

meet ROHS requirements

8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no tolerance is noted

Note:parts	in	bulk
100SET/bo	ıg	

					RoHS	Compliant	
nd .	5	COVER	_	RED HAT PACKING SMA	1	_	
	4	SMA FEMALE	_	11*1.13-ZYK-BACK PLUG RIVETING AND GOLD PLATING	1	_	
	3	HEAT SHRINK SLEEVE	_	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	_	
	2	IPEX-1.13 CONN	_	IPEX-1.13 BRASS GOLD	1	_	
	1	COAXIAL CABLE	_	RG1.13 DARK GREY-48-TIN-FEP JACKET L=105MM	1	105	
	ITEM	PART No.	VENDOR	DESCRIPTION	Q'TY	OVERALL	
	MATERIAL SPECIFICATION						

3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCR	IPTION	瀚荃股份有限公司 CviLux Corporation		CUST. CODE
2			LuLu	Iron	Iron	Waleed	RF CABLE				CUC
\triangle			08/21.20			08/21.20°	IN CABLL	- \Psi \sqrt{-1}	DRAWING No.	CviLux P/N	CUSTOMER P/N
SYM	NAME DATE	REVISIONS					SHEET: 1	OF 1	DH50624A	DH-20G50010	_