

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 16 AWG 1.31 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 65
 Resistance at 20 °C: 15 Ω /km max


Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: white
 Diameter: Ø 2.4 ±0.10 mm
 Nominal thickness: 0.43 mm
 Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 11028 16 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

Bend radius

Minimum: 4 times diameter (9.6 mm)

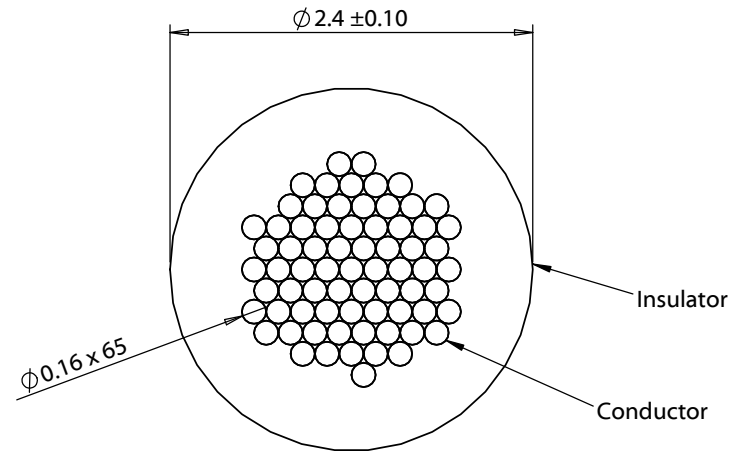

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY
A	2/23/2021	Initial release	AG <small>Digitally signed by AG Date: 2021.02.23 16:06:20 -08'00'</small>		
			Verified:	Phthalate and halogen free	tel 1.541.323.3228 800 877.670.7118
			AW <small>Digitally signed by AW Date: 2021.03.04 13:33:48 -08'00'</small>		fax 1.541.323.4202 web tensility.com
			Dimensions are in millimeters.	Description: Wire, hook-up, TS, 16 AWG, UL 11028, 600V, 105C, 2.4 mm, mPPE, white	Size: Part number:
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		A 30-01724
					Scale: 20:1
					⊙ ◻
					Sheet 1 of 1

5

4

3

2

1