

6

5




4

3


2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300500324	ENS1335M010	3' 3" +2.19'/-0" [1M +55.6/-0 mm]

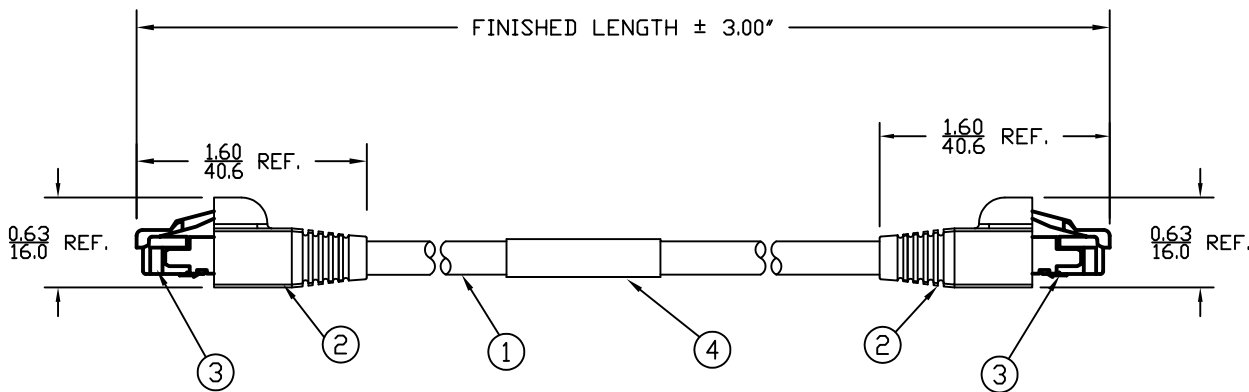

MALE - FACE VIEW



MALE - FACE VIEW

WIRE LIST	
PIN #	COLOR
1	WHITE/BLUE
2	BLUE
3	WHITE/ORANGE
4	NOT USED
5	NOT USED
6	ORANGE
7	NOT USED
8	NOT USED
GND	DRAIN WIRE

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #24/8 SHIELDED TWISTED PAIR, PUR
- 4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO +80°C
- 6) WRAP LABEL IS MARKED WITH P/N & DATE CODE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK

SD RELEASE EC NO: WNA2010-0442 DRWN: TVICKERS 2010/01/18 CHKD: BWOODMA APPR: DTTITUS 2010/01/19	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
				IN/MM	1:1	INCH			
		4 PLACES	±---	±---	DRAWN BY DATE			TITLE	
		3 PLACES	±---	±0.05	CHECKED BY DATE			ETHERNET MMJ RJ45/RJ45 I/O BASE T SHIELD ASSEM PUR STRANDED CABLE	
2 PLACES	±0.13	±0.10	APPROVED BY DATE		MOLEX INCORPORATED				
1 PLACE	±0.25	±0.20	DTITUS 2010/01/19		DOCUMENT NO. SD-130050-035				
ANGULAR ±1/2°			MATERIAL NO.		SHEET NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		1 OF 1				
A			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1