


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

|                                                |                                                                                                                                                |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                       | High Conductivity Seamless Copper Tube                                                                                                         |
| Plating                                        | Electro-Tin                                                                                                                                    |
| Wire Size                                      | 6 STR/FLEX                                                                                                                                     |
| Wire Type                                      | Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive                                                                          |
| Wire Strip Length                              | 1-1/8 in.                                                                                                                                      |
| Stud Size                                      | 3/8 in.                                                                                                                                        |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90° C                                                                                                                                          |
| C.SA Certified Wire Connector                  | Yes                                                                                                                                            |
| Panduit Color Code on Barrel                   | BLUE                                                                                                                                           |
| Panduit Die Index No. on Barrel                | P24                                                                                                                                            |
| Alternate Industry Die Index No. ( ) on Barrel | (7)                                                                                                                                            |

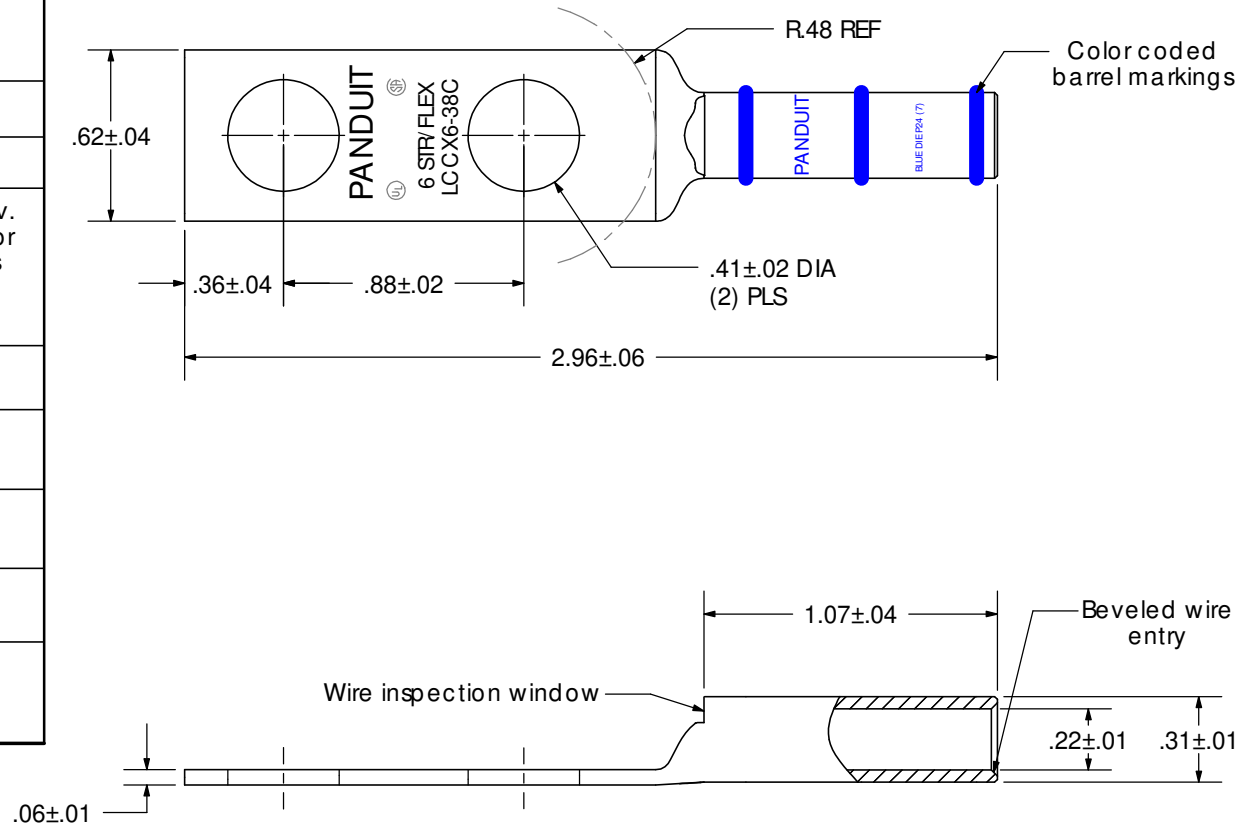

|     |      |     |     |             |       |                                                     |                       |
|-----|------|-----|-----|-------------|-------|-----------------------------------------------------|-----------------------|
|     |      |     |     |             |       | <b>PANDUIT CORP.</b> TINLEY PARK, ILLINOIS          |                       |
|     |      |     |     |             |       | LCCX6-38C-L                                         |                       |
|     |      |     |     |             |       | Copper Lug - Two-Hole, Long Flex Barrel with Window |                       |
| 00  | 6/03 | SAC | SAC | RELEASED    | 10850 | SCALE N/A                                           | DRAWING NO / CAD FILE |
| REV | DATE | BY  | CHK | DESCRIPTION | ECN   | LCCX6-38C-CUST                                      |                       |