


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑤ [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.
- ⑥ MARKINGS ON THIS SIDE.

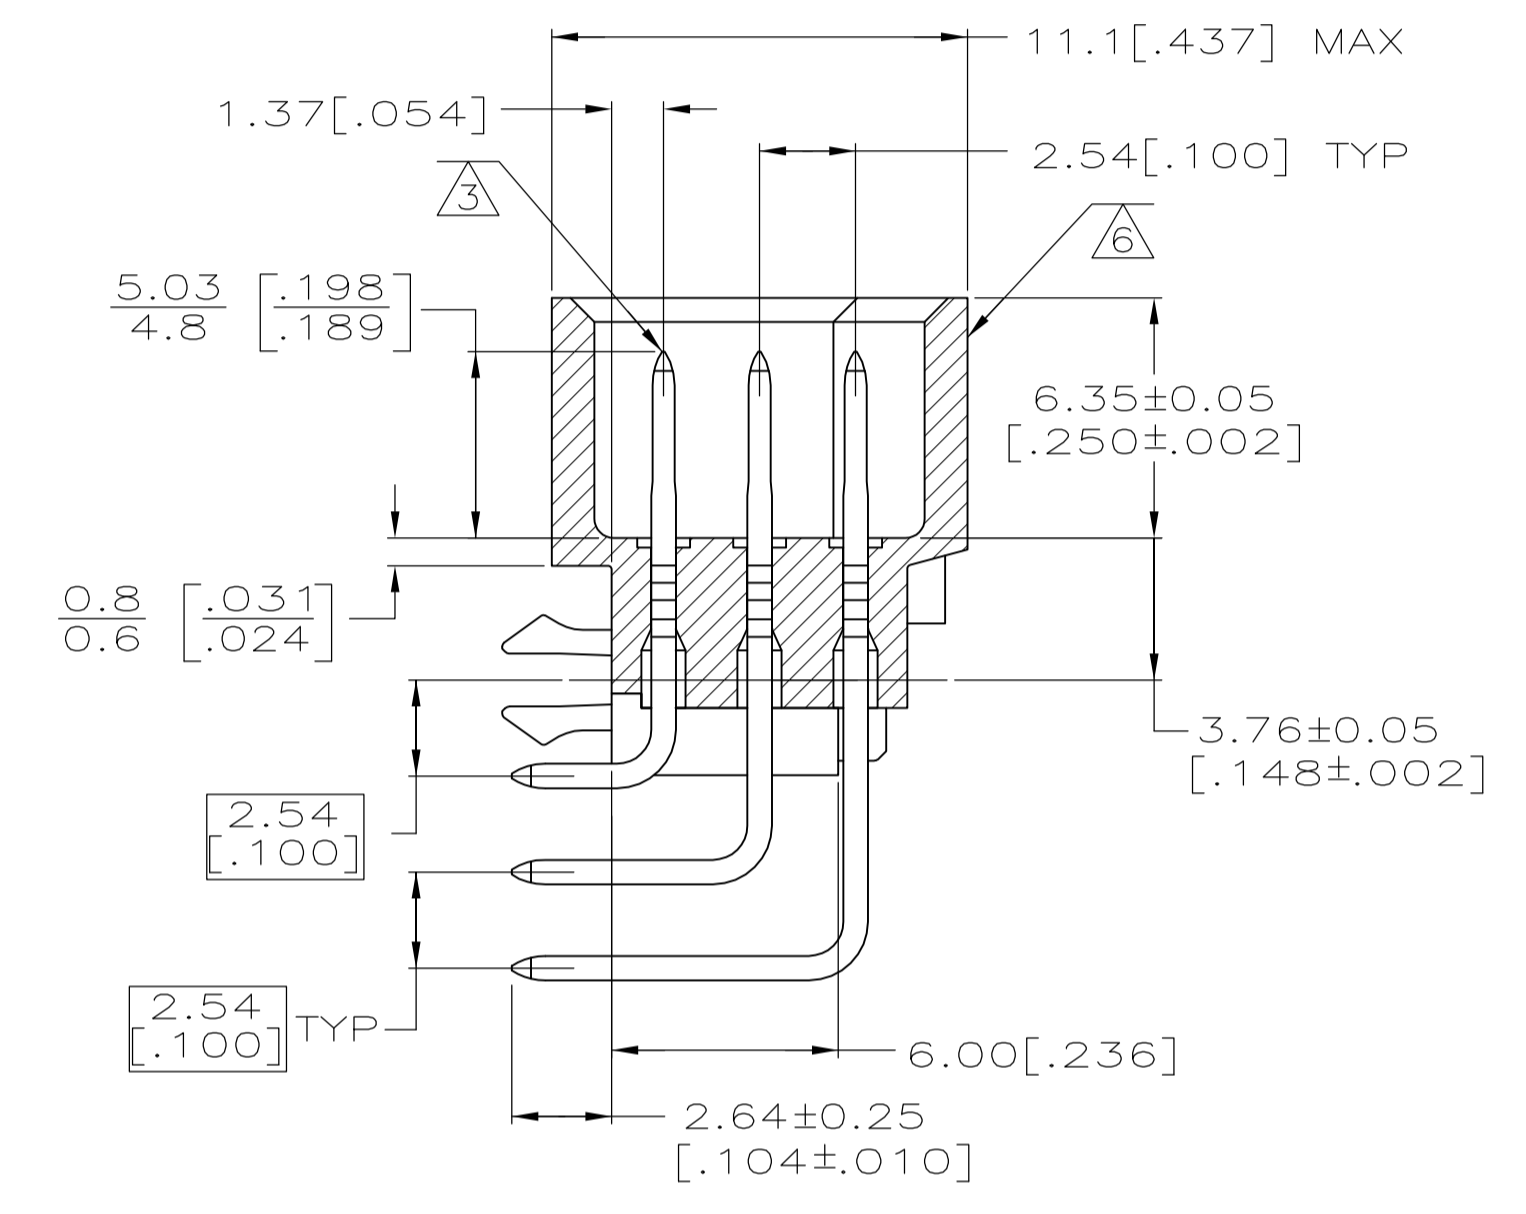

SECTION X-X

9,31,32	C	3	5148334-2
4-11,20,23,32	B	11	
9,11,15,17,19,21,22,31,32	A	9	
POSITIONS LOADED	ROWS	NO. OF LOADED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE	OSMAYOS	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CIK A. SHARPE	OSMAYOS	NAME ASSEMBLY, PIN, EUROCARD, TYPE C, 23/96 POSITION, SELECT LOAD, 2.64[.104] SOLDER POST, WITH BOARD-LOCKS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE	OSMAYOS	PRODUCT SPEC	
0 PLC	± -	APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
1 PLC	± -	WEIGHT		A1 00779 C=5148334	
2 PLC	± 0.13[.005]	CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV 01	
3 PLC	± -				
4 PLC	± -				
ANGLES	± -				