

PS2505-1X, PS2505-2X, PS2505-4X

PS2505-1, PS2505-2, PS2505-4



HIGH DENSITY A.C. INPUT PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

APPROVALS

- UL recognised, File No. E91231
Package code " EE "

'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead form :-
 - STD
 - G form
 - SMD approved to CECC 00802
- Certified to EN60950 by Nemko - Certificate No. P01102465

DESCRIPTION


The PS2505-1, PS2505-2, PS2505-4 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.

FEATURES


- Options :-
 - 10mm lead spread - add G after part no.
 - Surface mount - add SM after part no.
 - Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3\text{kV}_{\text{RMS}}, 7.5\text{kV}_{\text{PK}}$)
- AC or polarity insensitive input
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS


- Computer terminals
- Industrial systems controllers
- Telephone sets, Telephone exchangers
- Signal transmission between systems of different potentials and impedances

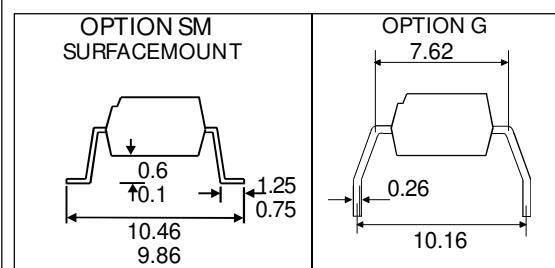




**PS2505-1X
PS2505-1**




Dimensions in mm



**PS2505-2X
PS2505-2**

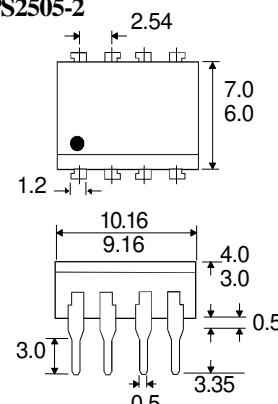

**PS2505-4X
PS2505-4**

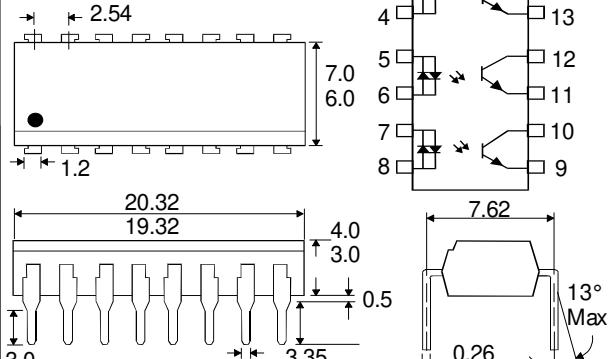

ABSOLUTEMAXIMUMRATINGS
(25°C unless otherwise specified)

Storage Temperature	-55°C to +125°C
Operating Temperature	-30°C to +100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUTDIODE

Forward Current	±50mA
Power Dissipation	70mW

OUTPUTTRANSISTOR

Collector-emitter Voltage BV _{CEO}	80V
Emitter-collector Voltage BV _{ECO}	6V
Collector Current	50mA
Power Dissipation	150mW

POWERDISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V _F)		1.2	1.4	V	I _F = ± 10mA
Output	Collector-emitter Breakdown (BV _{CEO}) (Note 2)	80			V	I _C = 1mA
	Emitter-collector Breakdown (BV _{ECO})	6		100	V nA	I _E = 100µA
	Collector-emitter Dark Current (I _{CEO})					V _{CE} =20V
Coupled	Current Transfer Ratio (CTR) (Note 2) PS2505-1, PS2505-2, PS2505-4	80		600	%	± 5mA I _F , 5V V _{CE}
	Collector-emitter Saturation Voltage V _{CE (SAT)}			0.3	V	± 10mA I _F , 2mA I _C
	Input to Output Isolation Voltage V _{ISO}	5300 7500			V _{RMS} V _{PK}	See note 1 See note 1
	Input-output Isolation Resistance R _{ISO}	5x10 ¹⁰			Ω	V _{IO} = 500V (note 1)
	Output Rise Time tr		4		µs	V _{CE} =2V,
	Output Fall Time tf		3		µs	I _C =2mA, R _L =100Ω

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory

