

AS Series

Anti-surge Thick Film Chip Resistors



FEATURES

- Small size and light weight
- Suitable for both wave and reflow soldering
- Can withstand high surge
- Reduction of assembly costs

SERIES SPECIFICATIONS


| Type | Power Rating at 70°C | Max Working Voltage | Max Overload Voltage | Dielectric Withstanding Voltage | Resistance Range |
|-------------|----------------------|---------------------|----------------------|---------------------------------|------------------|
| AS08 (0805) | 0.33W | 150V | 300V | 500V | 1Ω~10MΩ |
| AS12 (1206) | 0.5W | 200V | 400V | 500V | 1Ω~10MΩ |
| AS25 (2512) | 1.5W | 500V | 500V | 500V | 1Ω~20MΩ |

CHARACTERISTICS


| | |
|--------------------------|--|
| Std. Oper. Temp. | -55°C ~ +155°C |
| Standard Values | E-24 values |
| Construction | Thick film |
| Terminal material | Silver, copper, nickel, and tin, non-SAC alloy |
| Solderable finish | Matte tin |
| Tolerance | ±5% standard; ±10% and ±20% available |

| Test | ΔR | Test Methods (JIS C 5201-1) |
|--|--|---|
| Temperature Coefficient | 1Ω-10Ω: ≤ ±400PPM/°C (±200 PPM can be provided on a case to case basis) 11Ω-10MΩ: ≤ ±100PPM/°C | Natural ΔR/°C $R2-R1 \times 10^6$ (PPM/°C) $R1(t2-t1)$ R1: at room temp. (T1) R2: at room temp. plus 100°C (T2) Test pattern: room temp. (T1), room temp. +100°C(T2) |
| Short Time Overload | ±(1.0% + 0.1Ω) max. | Permanent ΔR after the application of a potential of 2.5 times RCWV for 5 sec. |
| Terminal Bending | ±(1.0% + 0.05Ω) max. | Twist of Test Board: Y/X = 3/90 mm for 60 sec. |
| Soldering Heat | ±(1.0% + 0.05Ω) max. | 260°C±3°C for 10 ±1 sec. |
| Single Pulse | ±(1.0% + 0.1Ω) max. | See graph on next page. |
| Humidity | ±(3.0% + 0.1Ω) max. | Temporary ΔR after 240 hr. at 40 ±2°C and 90-95% relative humidity |
| Load Life in Humidity | ±(3.0% + 0.1Ω) max. | ΔR after 1,000 hr. (1.5 hr. "on", 0.5 hr. "off") at RCWV at 40 ±2°C and 90-95% relative humidity |
| Load Life | ±(3.0% + 0.1Ω) max. | ΔR change after 1,000 hr. operating at RCWV, with duty cycle of (1.5 hours"on", 0.5 hour"off") at 70°C ±2°C ambient |
| Solderability | Min. 95% coverage | Wave Solder: 245°C ±3°C for 2-3 sec. |
| Temperature Cycling | ±(1.0% + 0.05Ω) max. | ΔR after 5 cycles: -55°C ±3°C 30 min. Room temp. 10-15 min. +155°C ±2°C 30 min. 4 Room temp. 10-15 min. |
| Dielectric withstanding voltage | No evidence of flashover, mechanical damage, arcing or insulation breakdown | Clamped in the trough of a 90°C metallic v-block at specified AC potential 60-70 sec. |

Derating



Reflow

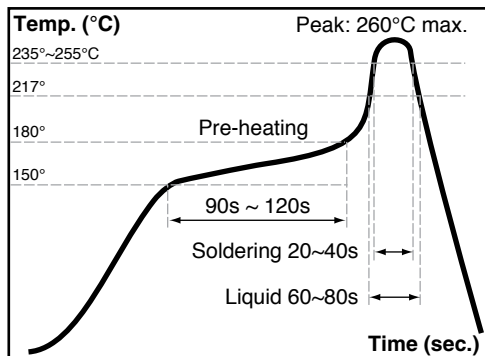


AS Series


Anti-surge Thick Film Chip Resistors

CHARACTERISTICS

Pulse Curve

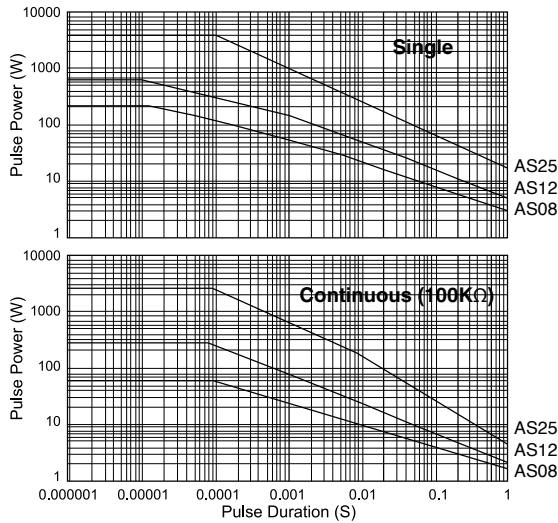


Lightning Surge

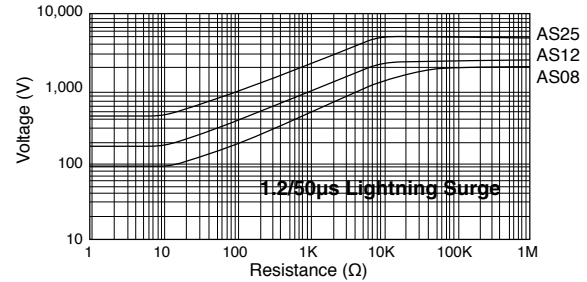



DIMENSIONS

(mm)

| Series | L | W | H | a | b |
|--------|------------|------------------|------------|------------|------------|
| AS08 | 2.00 ±0.15 | 1.25 +0.15/-0.10 | 0.55 ±0.10 | 0.40 ±0.20 | 0.40 ±0.20 |
| AS12 | 3.10 ±0.15 | 1.55 +0.15/-0.10 | 0.55 ±0.10 | 0.45 ±0.20 | 0.45 ±0.20 |
| AS25 | 6.35 ±0.10 | 3.10 ±0.15 | 0.55 ±0.10 | 0.60 ±0.25 | 0.50 ±0.20 |




Tape and Reel

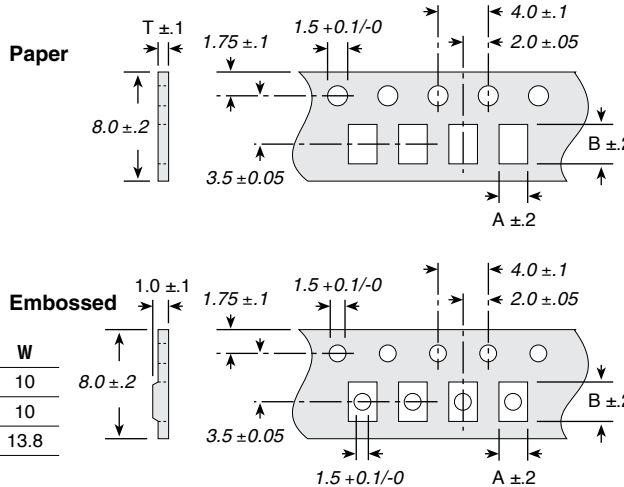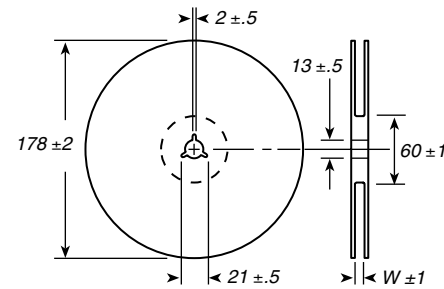

| Series | Packaging | Qty./reel | A | B | T | W |
|--------|-----------|------------|------|------|------|------|
| AS08 | Paper | 5,000 pcs. | 1.65 | 2.40 | 0.81 | 10 |
| AS12 | Paper | 5,000 pcs. | 2.00 | 3.60 | 0.81 | 10 |
| AS25 | Embossed | 4,000 pcs. | 3.50 | 6.70 | 1.0 | 13.8 |

Land Pattern



| Series | A | B | C |
|--------|-----|-----|-----|
| AS08 | 1.3 | 1.2 | 1.0 |
| AS12 | 1.8 | 1.2 | 2.2 |
| AS25 | 3.0 | 2.5 | 4.0 |

ORDERING INFORMATION

RoHS compliant

AS08J1004ET

| | | | |
|---|---|---|---|
| Series AS08= 0805 AS12= 1206 AS25= 2512 | Tolerance J = 5% standard for E24 values | Ohms First 3 digits are significant; 4th digit is multiplier. Values below 100 ohms use "R" as a decimal holder. examples: 1001 = 1000 ohms 1502 = 15000 ohms | TCR T= tape and reel: 0805 and 1206 paper tape; 2512 embossed tape. |
|---|---|---|---|

Standard Part Numbers

| 0805 | 1206 | 2512 |
|-------------|-------------|-------------|
| AS08J1R00ET | AS12J1R00ET | AS25J1R00ET |
| AS08J10R0ET | AS12J10R0ET | AS25J10R0ET |
| AS08J1000ET | AS12J1000ET | AS25J12R0ET |
| AS08J1001ET | AS12J1001ET | AS25J15R0ET |
| AS08J1002ET | AS12J1002ET | AS25J22R0ET |
| AS08J1003ET | AS12J1003ET | AS25J1000ET |
| AS08J1004ET | AS12J1004ET | AS25J1001ET |
| | | AS25J1002ET |
| | | AS25J1003ET |
| | | AS25J1004ET |

rev 10/20-2