
# 917241-6 - ACTIVE

### Dynamic Series | Dynamic 3000 Series

TE Internal #: 917241-6 Housing, Housing for Male Terminals, Wire-to-Wire, 12 Position, .2 in [5.08 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series

### View on TE.com >

#### Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

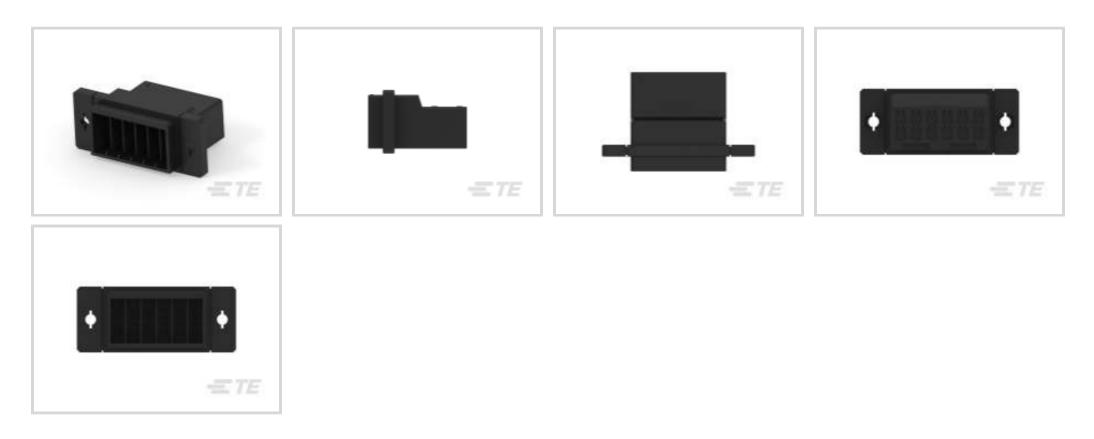

Receptacle and Tab Housing: 5.08 mm pitch, 600V

Connector Product Type: Housing

Connector & Housing Type: Housing for Male Terminals

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 5.08 mm [.2 in]

All Receptacle and Tab Housing: 5.08 mm pitch, 600V (24)



### Features

### Product Type Features

Connector Product Type	Housing				
Connector & Housing Type	Housing for Male Terminals				
Connector System	Wire-to-Wire				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	12				
Number of Rows	2				
Body Features					
Primary Product Color	Black				
Termination Features					

Housing, Housing for Male Terminals, Wire-to-Wire, 12 Position, .2 in [5.08 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



Termination Method to Wire & Cable	Crimp				
Mechanical Attachment					
Mating Retention	With				
Connector Mounting Type	Panel Mount				
Housing Features					
Centerline (Pitch)	5.08 mm[.2 in]				
Dimensions					
Row-to-Row Spacing	5.08 mm[.2 in]				
Usage Conditions					
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]				
Operation/Application					
Circuit Application	Power & Signal				
Product Compliance For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Compliant				
EU ELV Directive 2000/53/EC	Compliant				

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Housing, Housing for Male Terminals, Wire-to-Wire, 12 Position, .2 in [5.08 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series




# **Compatible Parts**



# Also in the Series | Dynamic 3000 Series

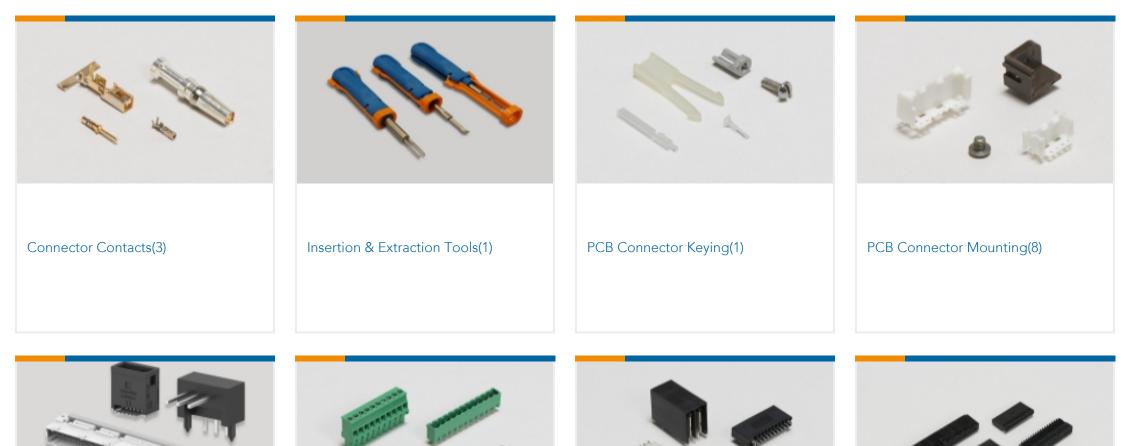

STRATTON .	and the second s		
PCB Headers & Receptacles(283)	PCB Terminal Blocks(25)	Standard Rectangular Connectors(2)	Wire-to-Board Connector Assemblies & Housings(152)

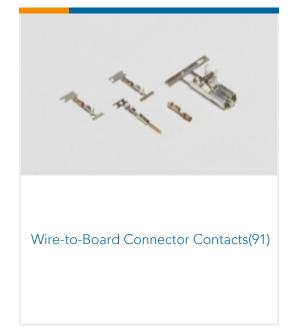

Customers Also Bought

Housing, Housing for Male Terminals, Wire-to-Wire, 12 Position, .2 in [5.08 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series





## Documents

Product Drawings DYNAMIC D-3500 WTW TAB HSG 12P

English

# CAD Files Customer View Model

### ENG\_CVM\_CVM\_917241-6\_L.2d\_dxf.zip

English

#### 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_917241-6\_L.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_917241-6\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages 1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

Japanese

1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

English

**DYNAMIC 3500 SERIES** 

English

**Product Specifications** 

Housing, Housing for Male Terminals, Wire-to-Wire, 12 Position, .2 in [5.08 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



**Product Specification** 

English

Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals TUV Certificate

English