




REV.	DATE	ECR NO.	DESCRIPTION
NC	03/12/13	XXXXXX	INITIAL RELEASE

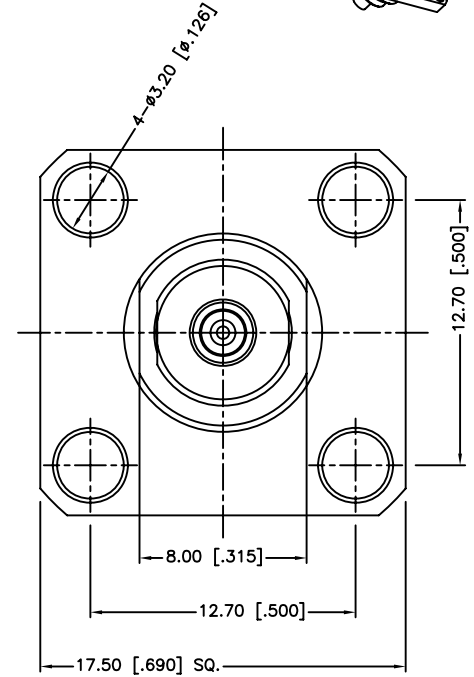

RECOMMENDED
CABLE STRIPPING DIM'S

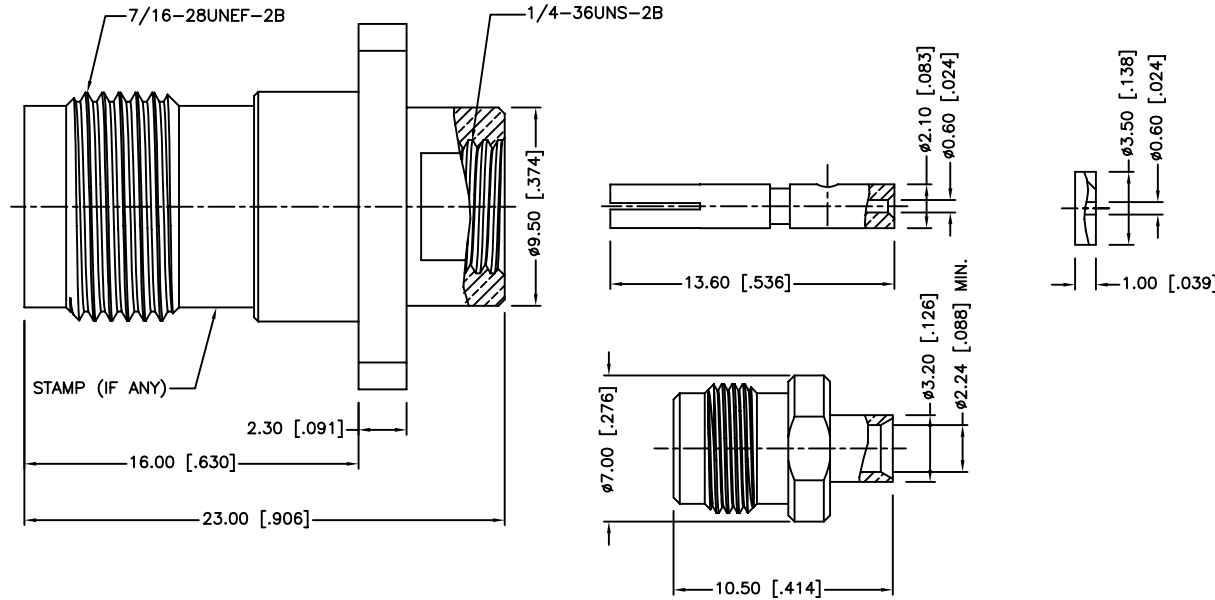

- NOTES:
1. IMPEDANCE:50 OHM
 2. FREQUENCY RANGE: DC 0 - 11 GHz
 3. DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS. MIN.
 4. DURABILITY:500 CYCLES MIN.
 5. TEMPERATURE RANGE:-65°C TO +165°C
 6. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068

6	SOLDER NUT	BRASS	GOLD	1
5	INSULATOR	PTFE	NATURAL	1
4	LOCK RING	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
<0.5 ± 0.05mm
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
<.020 ± 0.002"
.020 - .236 ± 0.004"
.236 - 1.180 ± 0.007"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°
DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	S.LI	03/12/13
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/122389.DWG	

<h1>Amphenol Connex</h1>			
PART DESCRIPTION			
TNC PANEL DIRECT SOLDER JACK (FOR .085",.086" CABLE)			
PART NO.			
122389			
DWG. NO.	122389.DWG	REV.	NC
SIZE	A	SCALE	NA