


# CUSTOMER DRAWING

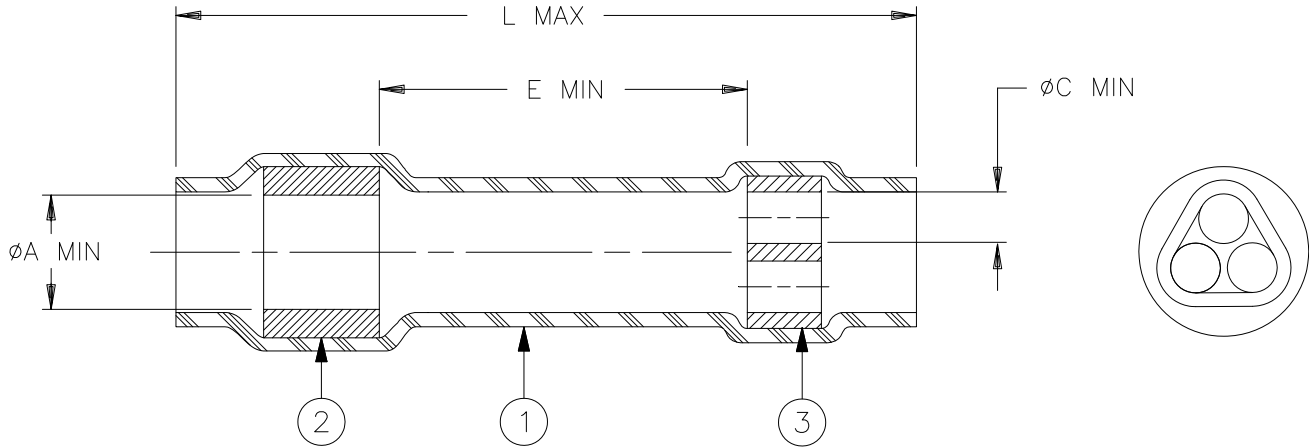

Product Revision		Product Dimensions				Cable Dimension
Product Name		L max	E min	øA min	øC min	øD max
D-436-94	E	29.7 (1.170)	15.25 (0.600)	4 (0.160)	2.35 (0.093)	2.35 (0.093)


## MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RING: Immersion resistant modified thermoplastic fluoroelastomer. Color: Blue.
3. INTEGRAL THREE WIRE SEAL: Immersion resistant modified thermoplastic fluoroelastomer. Color: Blue.

## APPLICATION

1. This part is designed to provide an immersion resistant seal 2 or 3 to 1 in-line splices made of wires having insulations rated for at least +135°C.
2. Part will seal on a single wire having a minimum insulation diameter of 1.27 (0.050).
3. Temperature range: -55°C to +150°C.

Cable dimension:



<b>STE</b> TE Connectivity		Raychem Devices	TITLE: <b>SEALING SLEEVE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: <b>D-436-94</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		REVISED PER: ECO-15-009348	REVISED DATE: JUNE 23, 2015	
DRAWN BY: M. FORONDA	DATE: 06/29/98	PROD. REV. SEE TABLE	DOC REV. B	SCALE: None	SIZE: A	SHEET: 1 of 1