GIOD I CIX, II IC.	Drawing Title: 3 position Male Power DIN snap and lock connector, color White to 3 position Male Power DIN snap and lock connector, color White, GT Cable #2464-3c/18+SW: 18 / 3+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 1000mm, GlobTek White	
186 Veterans Drive,	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

CIOD I CIX, II IC.	LII 2464 80 Deg C 300V Approvale: 1000mm GlobTek White	
•	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

REVISION HISTORY

RE	EV	DESCRIPTION	SUB	DATE	APPROVED
	Α	Initial release	QA	09/02/2020	QA

Cordset Information:


 $Cordset Color : Glob Tek\ White$

Cord Length (mm):1000


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

CIOD I CIX, IIIC.	III 2464 80 Deg C 300V Approvals: 1000mm ClohTek White	
	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

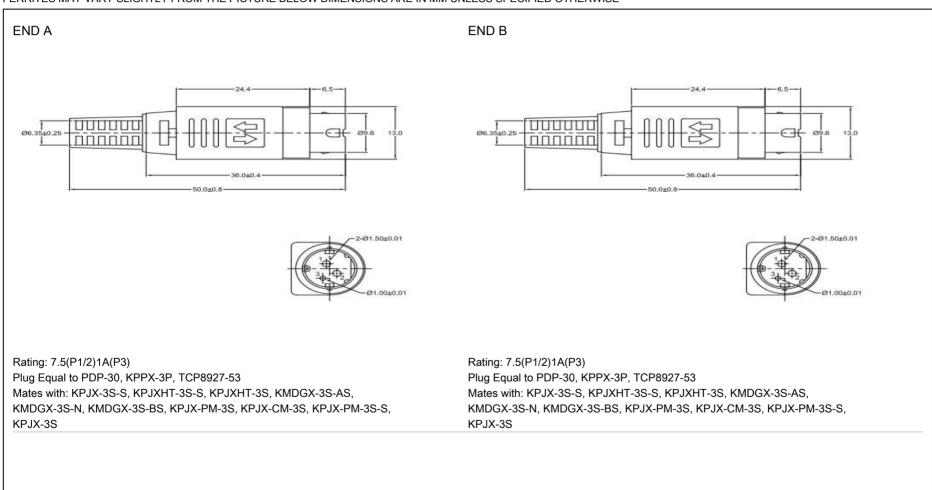

CIOD I CIX, IIIO.	LII 2464_80 Dea C_300V_Approvals: 1000mm GlohTek White	
	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

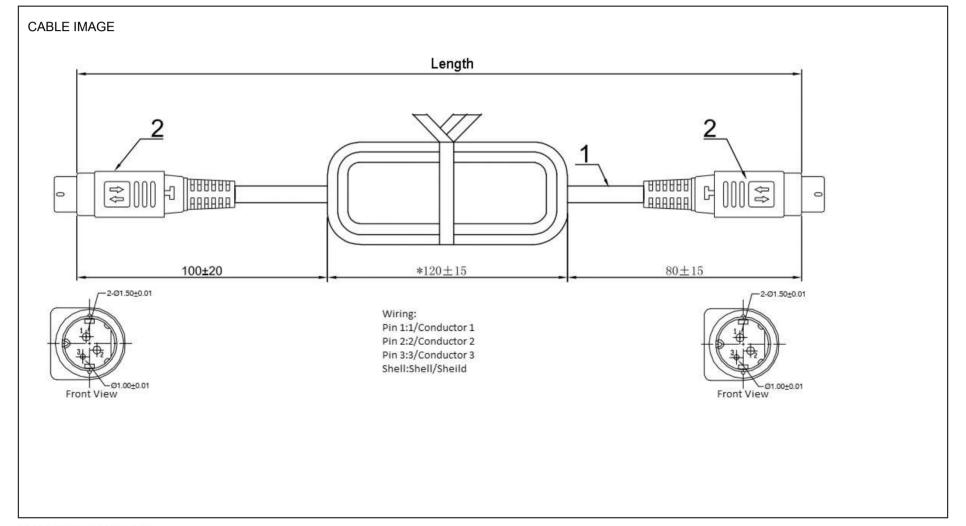

GIOD I CIX, II IC.	III 2464_80 Deg C_300V_Approvale: _1000mm_GlobTek White	
•	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

End A	Cable	End B
Code:YL3W	Code:2464-3c/18+SW	Code:YL3W
Description:3 position Male Power DIN snap and lock	Description:GT Cable #2464-3c/18+SW: 18 / 3+Shield	Description:3 position Male Power DIN snap and lock
connector, color White	Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals:	connector, color White
Rating (V):56	Color:GlobTek White	Rating (V):56
Rating (A):0.0	Wire Gauge(AWG):18	Rating (A):0.0
Gender:Male	Cond:3+Shield	Gender:Male
Overmolded:No	Type:UL2464	Overmolded:No
	Temperature:80° C	
	Amps:5A/c	
	Volts:300	
	OD:6	
	ConductorsColors:	

Overall cable rating:56V 7.5(P1/2)1A(P3)

Plug Approvais	Cable Approvals	Connector Approvals
	UL RECOGN	NIZED
AGENCY ONLINE DOCUMENTS	http://en.globtek.com/cordsets/	
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000004vp	PmAAI
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.p	<u>df</u>
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf	
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf	
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product	_model_family_incl_cord?id=01t3a000004vpPm
IPXY rating is based on 3rd party testing a	and customers should check suitability and test system level IP	XY rating before ordering.

PROPRIETARY INFORMATION

CIOD I CIX, IIIC.	Drawing Title: 3 position Male Power DIN snap and lock connector, color White to 3 position Male Power DIN snap and lock connector, color White, GT Cable #2464-3c/18+SW: 18 / 3+Shi UL2464, 80 Deg.C, 300V, , Approvals: , 1000mm, GlobTek White	ield Conductors, 6mm OD,
	Model No. Low voltage cable	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. YL326461M0YL3WH(R)	Rev A
Fax (201) 784-0111		

Hanking:
Description:
Image:
Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):