

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Module set for the optical monitoring and floating remote signaling of adjacent surge protective devices in the TERMITRAB complete or CLIXTRAB product family. Suitable for directly grounded DIN rails.

## Your advantages

- Space-saving and cost-saving with a narrow overall width of just 6 mm
- Collective remote monitoring of up to 40 protective devices via optical monitoring
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2907811             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | CL23                |
| Product key                          | CL226Z              |
| Catalog page                         | Page 127 (C-4-2019) |
| GTIN                                 | 4055626244419       |
| Weight per piece (including packing) | 74.114 g            |
| Weight per piece (excluding packing) | 71.7 g              |
| Customs tariff number                | 85363010            |
| Country of origin                    | DE                  |

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## Technical data

### Product properties

|                |                            |
|----------------|----------------------------|
| Type           | DIN rail module, one-piece |
| Product type   | Remote signaling set       |
| Product family | TERMITRAB complete         |

### Insulation characteristics

|                  |   |
|------------------|---|
| Pollution degree | 2 |
|------------------|---|

### Electrical properties

#### Indicator/remote signaling

|                    |             |
|--------------------|-------------|
| Switching function | N/C contact |
|--------------------|-------------|

#### Supply: Status indicator/remote signaling

|                   |                     |
|-------------------|---------------------|
| Operating voltage | 10 V DC ... 36 V DC |
| Operating current | 30 mA DC (24 V)     |
|                   | 60 mA DC (10 V)     |


### Connection data

|                                  |   |
|----------------------------------|---|
| Connection method                | Push-in connection                          |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section AWG      | 24 ... 12                                   |

### Ex data

|          |                 |
|----------|-----------------|
| Altitude | ≤ 2000 m (amsl) |
|----------|-----------------|

### Dimensions
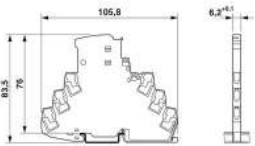
|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 12.6 mm +0.1 mm  |
| Height              | 105.8 mm   |
| Depth               | 83.5 mm (incl. DIN rail 7.5 mm)  |

### Material specifications

|  |     |
|--|-----|
| Flammability rating according to UL 94 | V-0 |
| Insulating material                    | PBT |
| Housing material                       | PBT |

### Protective circuit

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

|                                |                                   |
|--------------------------------|-----------------------------------|
| Surge protection fault message | Optical, remote indicator contact |
|--------------------------------|-----------------------------------|

## Environmental and real-life conditions

### Ambient conditions

|   |                  |
|---|------------------|
| Degree of protection                    | IP20             |
| Ambient temperature (operation)         | -40 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Altitude                                | ≤ 4000 m (amsl)  |
| Permissible humidity (operation)        | 5 % ... 95 %     |

## Approvals

### Conformity/Approvals

|                  |  |
|------------------|--|
| UL, USA / Canada | Class I, Div. 2, Groups A, B, C, D T4A |
|------------------|--|

## Standards and regulations

|                          |                |
|--------------------------|----------------|
| Standards/specifications | EN 61000-6-2   |
| Note                     | 2005           |
| Standards/specifications | EN 61000-6-3   |
| Note                     | 2007 + A1:2011 |
| Standards/specifications | EN IEC 60079-0 |
| Note                     | 2018           |
| Standards/specifications | EN IEC 60079-7 |
| Note                     | 2015 + A1:2018 |
| Standards/specifications | IEC 60079-0    |
| Note                     | 2017           |
| Standards/specifications | IEC 60079-7    |
| Note                     | 2017           |

## Mounting

|               |                          |
|---------------|--------------------------|
| Mounting type | DIN rail: TH 35 - 7.5 mm |
|---------------|--------------------------|


# TTC-6-FMRS-PT - Remote signaling set

2907811


<https://www.phoenixcontact.com/us/products/2907811>

## Drawings

Circuit diagram

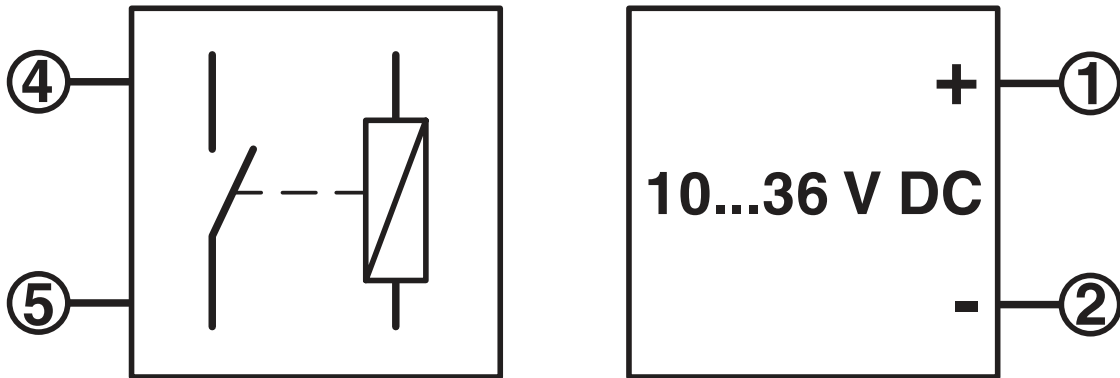

Dimensional drawing

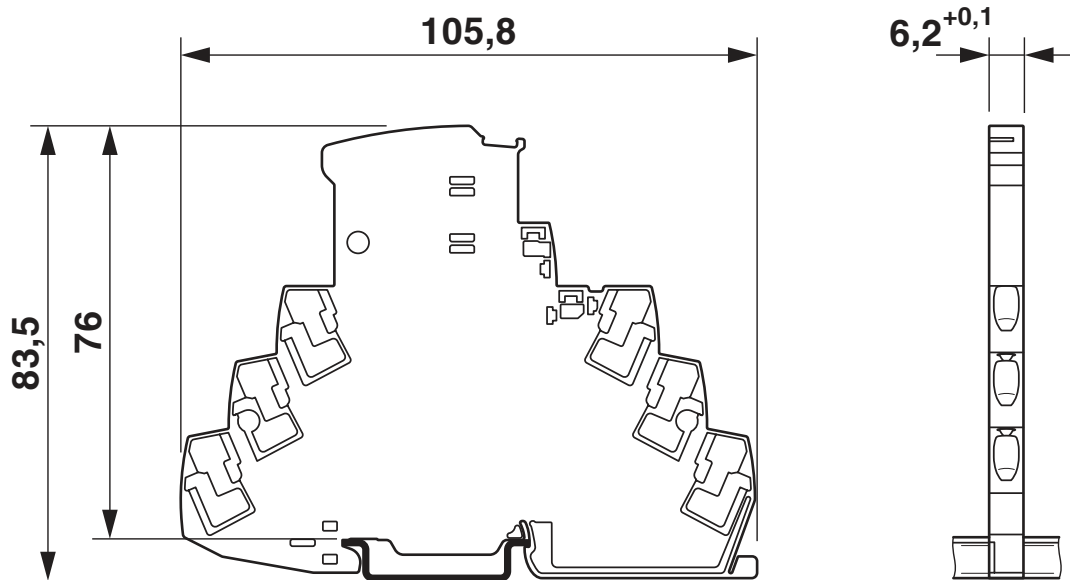

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2907811>



**CSA**

Approval ID: 70136717



**DNV GL**

Approval ID: TAE000027G



**UL Listed**

Approval ID: FILE E 138168



**CSAus**

Approval ID: 70136717

**UAE-RoHS**

Approval ID: 22-06-16192



**cUL Listed**

Approval ID: FILE E 333250



**UL Listed**

Approval ID: FILE E 333250



**IECEx**

Approval ID: IECEx BVS 21.0057X



**CCC**

Approval ID: 2022122304116080



**ATEX**

Approval ID: BVS 21 ATEX E 052 X

**cCSAus**

# TTC-6-FMRS-PT - Remote signaling set

2907811

<https://www.phoenixcontact.com/us/products/2907811>



**cULus Listed**

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27130813 |
| ECLASS-13.0 | 27171501 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC001627 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121600 |
|-------------|----------|

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## Environmental product compliance

|            |  |
|------------|--|
| REACH SVHC | Lead 7439-92-1   |
| China RoHS | Environmentally Friendly Use Period = 50 years   |
|            | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |



# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## Accessories

### ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/us/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

### ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/us/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# TTC-6-FMRS-PT - Remote signaling set



2907811

<https://www.phoenixcontact.com/us/products/2907811>

## ZBF 6/WH-100:UNBEDRUCKT - Zack Marker strip, flat

0808736

<https://www.phoenixcontact.com/us/products/0808736>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 1000

---

## ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/us/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# TTC-6-FMRS-PT - Remote signaling set

2907811

<https://www.phoenixcontact.com/us/products/2907811>



## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## TS-UK 6-T - Separating plate

3072820

<https://www.phoenixcontact.com/us/products/3072820>



Separating plate, length: 66.5 mm, width: 1 mm, height: 66.5 mm, color: gray

# TTC-6-FMRS-PT - Remote signaling set

2907811

<https://www.phoenixcontact.com/us/products/2907811>



## TTC-EX-PP - Separating plate

1011977

<https://www.phoenixcontact.com/us/products/1011977>

Partition plate for NS-35/7,5 DIN rails to ensure a clearance of 50 mm between the remote signaling module and surge protection in TTC-EX systems.



---

## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>

Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm



---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)