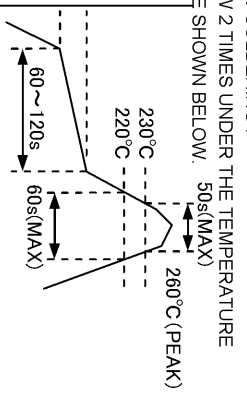


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

APPLICABLE STANDARD		TEST METHOD		REQUIREMENTS		QT	AT
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C <sup>(1)(2)</sup>	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C <sup>(3)</sup>			
	OPERATING HUMIDITY RANGE	RH 85 % MAX <sup>(2)(4)</sup>	STORAGE HUMIDITY RANGE	RH 70 % MAX <sup>(3)(4)</sup>			
VOLTAGE	60 V AC		CURRENT	0.5 A			
SPECIFICATIONS							
ITEM	TEST METHOD			REQUIREMENTS			
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.			
MARKING	CONFIRMED VISUALLY.						
ELECTRIC CHARACTERISTICS							
CONTACT RESISTANCE	20 mV MAX, 1 mA(DC OR 1000Hz)		80 mΩ MAX <sup>(5)</sup>				
INSULATION RESISTANCE	100 V DC.		500 MΩ MIN.				
VOLTAGE PROOF	200 V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.				
MECHANICAL CHARACTERISTICS							
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR			INSERTION FORCE: 20.5 N MAX WITHDRAWAL FORCE: 2.05 N MIN.			
MECHANICAL OPERATION	50 TIMES INSERTIONS AND EXTRACTIONS.			① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGL AMPITUDE : 0.75 mm, FOR 2 h IN 3 DIRECTIONS.			① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	
SHOCK	490 m/s <sup>2</sup> , DURATION OF PULSE 11 ms FOR 3 TIMES IN 3 DIRECTIONS.					X	
ENVIRONMENTAL CHARACTERISTICS							
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90 ~ 95 %, 96 h.			① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE.		X	
DRY HEAT	EXPOSED AT 85±2 °C, 96 h.						
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → +5~+35 → +85 → +5~+35 °C TIME 30 → 5 MAX → 30 → 5 MAX min. UNDER 5 CYCLES.			② INSULATION RESISTANCE: 500 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.		X	
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE.		X	
SULFUR DIOXIDE	EXPOSED IN 25 PPM FOR 96 h. (TEST STANDARD: JIS C 60068)			② NO DERECTION SUCH AS CORROSION WHICH IMPAIRS THE FUNCTION OF CONNECTOR.		X	
AMMONIA RESISTANCE	HYDROGEN-ION CONCENTRATION(pH)=10 TEST TIME:72±4h, TEMPERATURE:-15~35°C.			CONTACT RESISTANCE: NO VARIATION OF 20mΩ OR MORE FROM INITIAL VALUE.		X	
RESISTANCE TO SOLDERING HEAT	1)REFLOW SOLDERING: REFLOW 2 TIMES UNDER THE TEMPERATURE PROFILE SHOWN BELOW. 50s(MAX)  2) SOLDERING IRONS: 360°C MAX. FOR 5 sec.			NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINAL.		X	
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE 240±3°C FOR IMMERSION DURATION: 3 sec.			A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMERSIED.		X	
COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED		DATE	
△							
REMARKS							
① INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING.		APPROVED		HS. OKAWA		10. 03. 09	
② OPERATING TEMPERATURE SHOULD BE -55 TO 40°C WHEN HUMIDITY EXCEEDS 80% RH.		CHECKED		HT. YAMAGUCHI		10. 03. 09	
③ "STORAGE" MEANS A LONG-TERM STORAGE STATE FOR THE UNUSED PRODUCT BEFORE ASSEMBLY TO PCB.		DESIGNED		TP. MATSUMOTO		10. 03. 09	
④ THERE MUST NOT BE DEWFALL.		DRAWN		TP. MATSUMOTO		10. 03. 09	
⑤ DON'T INCLUDE THE CONDUCTOR RESISTANCE OF THE CABLE OF THE COMBINATION CONNECTOR.							
Unless otherwise specified, refer to JIS-C-5402.							
Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.		ELC4-330389-00			
SPECIFICATION SHEET		PART NO.		FX16M2-41S-0.5SV			
HIROSE ELECTRIC CO., LTD.		CODE NO.		CL575-3002-6-00			
						△	
						1/1	