

REV. 0

DCO 16185

COIL: @ 25°C
 RESISTANCE _____ 10000 OHMS ±20%
 NOMINAL VOLTAGE _____ 94.0 - 114.0 VDC
 MUST OPERATE _____ 63.0 VDC


 MUST RELEASE _____ 39.5 VDC MAX., 12.5 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 100 _____ g's _____ 11 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE 5 MS MAX.
 _____ RELEASE 4 MS MAX.
 _____ CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

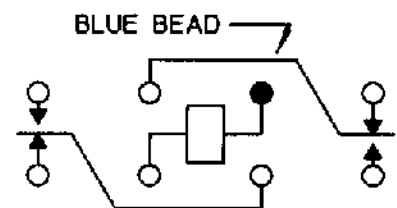

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 3/23/00

CK. ~~3/23/00~~



COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. _____ GENICOM
 CUST. NO. _____ 3SAF5002T1 _____ REV. _____

'FW' RELAY

FW1101S06