
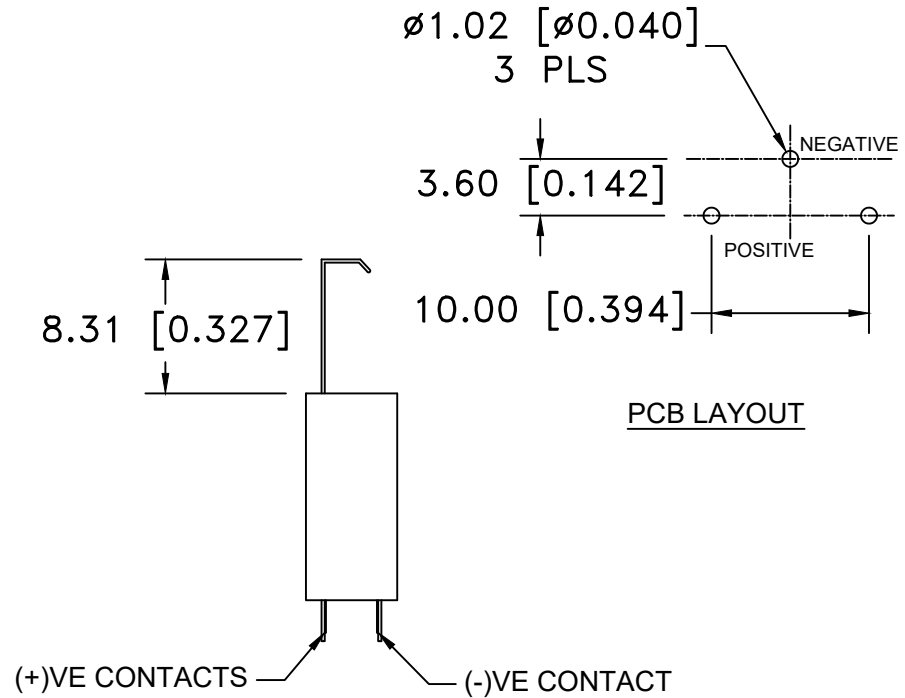
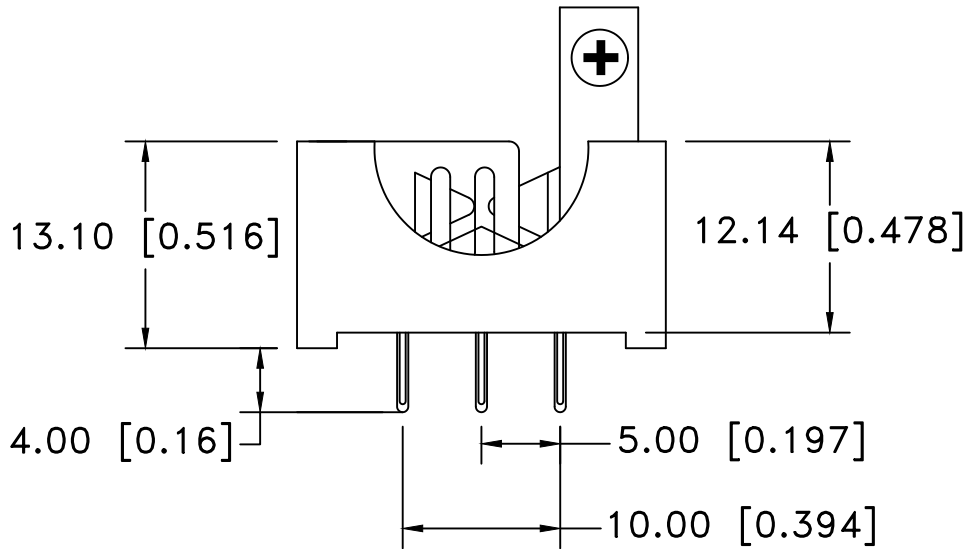



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/07/14	A	DIM. 8.31 WAS 8.51	T.B.	B.S.	
10/18/19	B	Added weight of the part	T.B.	B.S.	

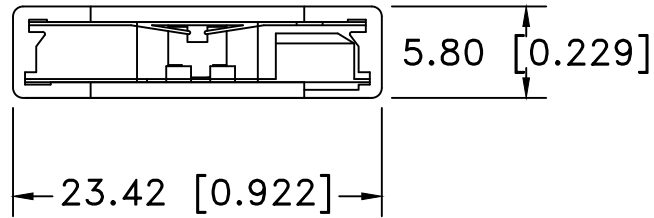

NOTES:

MATERIAL: GLASS FILLED NYLON 66, UL94V-0
 COLOR BLACK, UL FILE NO. E196894
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
 ELECTRICAL :
 VOLTAGE: 250V AC
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000mΩ AT DC 500V
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE
 TEMPERATURE RANGE: -40°C TO +200°C
 ROHS COMPLIANT

Weight: 1.65g

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.	
Fractional ± .8 (.030)	Title BR/CR/DL 2032 VERTICAL BATTERY HOLDER, 3 PINS			
Angular ± 3°	Date 10/18/19	Drawing Number BK-5058-4MM		