


New Product Introduction

June 27, 2011

AQY221R2T:
New VSSOP PhotoMOS[®] Relays with Smallest Footprint Available




mm inch



1. Features:

- **4.6 mm² mounting area. Smallest in our line-up.**
29% mounting area reduction from SON type, which contributes to device miniaturization and higher density mounting.

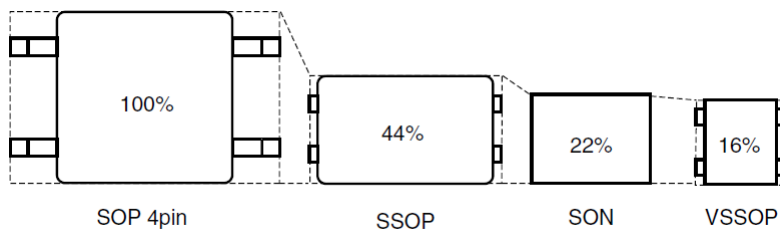

- **Low on resistance and low on output capacitance available at CxR10.**
 - Output capacitance (Cout): 14 pF (typical)
 - On resistance (Ron): 0.8Ω (typical)

2. Applications:

- **Measuring and testing equipment**
IC tester, Probe card, Board tester and other testing equipment
- **Telecommunication equipment**

3. Release Schedule: June 2011

4. Ordering Information:

TYPES

Type		Output rating*1		Part No. (Tape and reel packing style)*2		Packing quantity in the tape and reel
		Load voltage	Load current	Picked from the 1 and 4-pin side	Picked from the 2 and 3-pin side	
AC/DC type	Low on resistance (R type)	40 V	250 mA	AQY221R2TY	AQY221R2TW	1,000 pcs.

Notes: *1 Indicate the peak AC and DC values.

*2 Only tape and reel package is available.
For space reasons, only "1R2" is marked on the product as the part number.

5. Technical Information: Please refer to attached datasheet for details.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQY221R2T	Remarks
Input side	LED forward current	I_F	50 mA	
	LED reverse voltage	V_R	5 V	
	Peak forward current	I_{FP}	1 A	$f = 100$ Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW	
Output side	Load voltage (peak AC)	V_L	40 V	
	Continuous load current	I_L	0.25 A	Peak AC, DC
	Peak load current	I_{peak}	0.75 A	100 ms (1shot), $V_L = DC$
	Power dissipation	P_{out}	250 mW	
Total power dissipation		P_T	300 mW	
I/O isolation voltage		V_{iso}	200 V AC	
Operating temperature		T_{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
Storage temperature		T_{stg}	-40°C to +100°C -40°F to +212°F	

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY221R2T	Condition	
Input	LED operate current	Typical	0.5 mA	$I_L = \text{Max.}$	
		Maximum	3 mA		
	LED turn off current	Minimum	0.1 mA	$I_L = \text{Max.}$	
		Typical	0.4 mA		
LED dropout voltage	Typical	V_F	1.14 V	$I_F = 5$ mA	
	Maximum		1.5 V		
Output	On resistance	Typical	0.8 Ω	$I_F = 5$ mA, $I_L = \text{Max.}$	
		Maximum	1.25 Ω		
	Output capacitance	Typical	C_{out}	14 pF	$I_F = 0$ mA, $f = 1$ MHz, $V_B = 0$ V
		Maximum		18 pF	
Off state leakage current	Typical	I_{Leak}	0.02 nA	$I_F = 0$ mA, $V_L = \text{Max.}$	
	Maximum		10 nA		
Transfer characteristics	Turn on time*	Typical	T_{on}	$I_F = 5$ mA, $V_L = 10$ V, $R_L = 40$ Ω	
		Maximum			0.5 ms
	Turn off time*	Typical	T_{off}	$I_F = 5$ mA, $V_L = 10$ V, $R_L = 40$ Ω	
		Maximum			0.2 ms
	I/O capacitance	Typical	C_{iso}	0.4 pF	$f = 1$ MHz, $V_B = 0$ V
		Maximum		1.5 pF	

Note: Please refer to the "Schematic and Wiring Diagrams" for connection method.


*Turn on/Turn off time

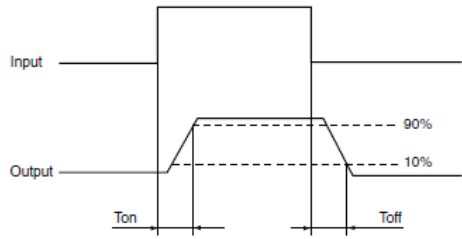

DIMENSIONS (mm inch)




External dimensions



- ① Input: DC+
- ② Input: DC-
- ③ Output: AC/DC
- ④ Output: AC/DC

General tolerance: $\pm 0.1 \pm .004$

Recommended mounting pad (Top view)



Tolerance: $\pm 0.1 \pm .004$

SCHEMATIC AND WIRING DIAGRAMS

E_i: Power source at input side, I_f: LED forward current, V_L: Load voltage, I_L: Load current

Schematic	Output configuration	Load	Connection	Wiring diagram
	1 Form A	AC/DC	—	

Any questions, please contact your local Panasonic Electric Works Sales representatives.

Ref#: M-402