THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG

RELEASED FOR PUBLICATION
FREI FUER VEROEFFENTLICHUNG

© COPYRIGHT – By –

ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	A9	REVISED PER ECR-17-014412	03APR18	NG	MKO

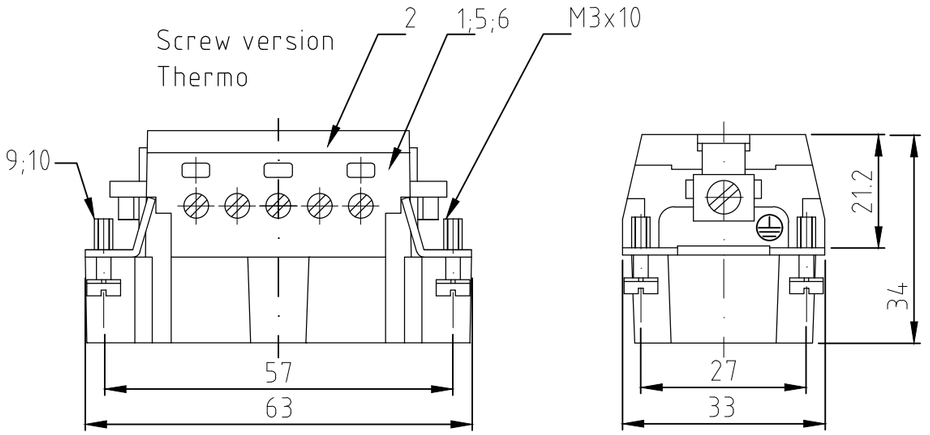

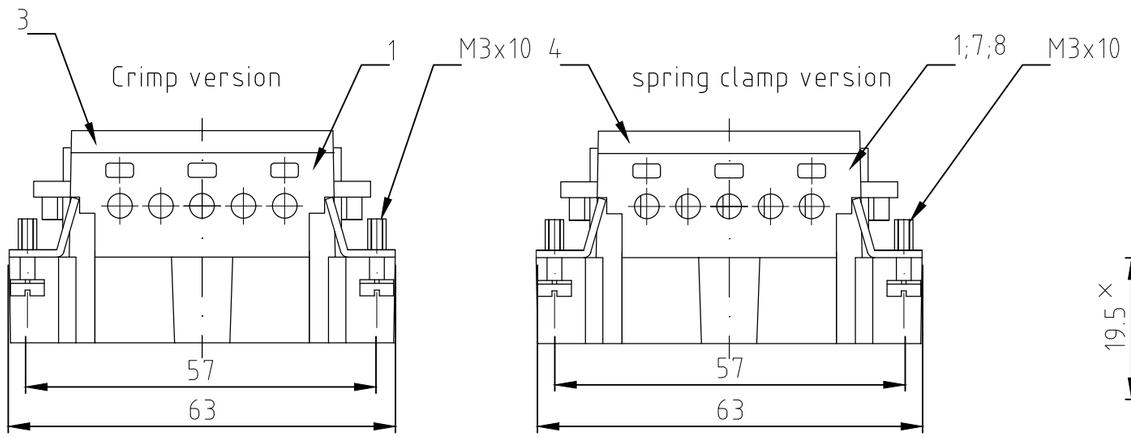

assembly directions



× distance for a safe contact max: max: 21 mm

Printing 1-10 Thermo

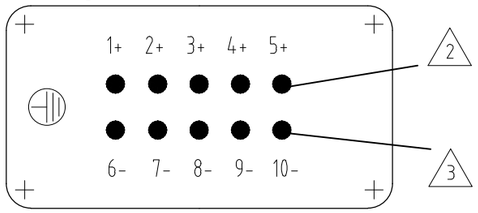

Printing 1-10 Screw

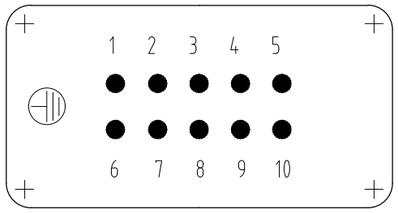

Contact arrangement

view from termination side



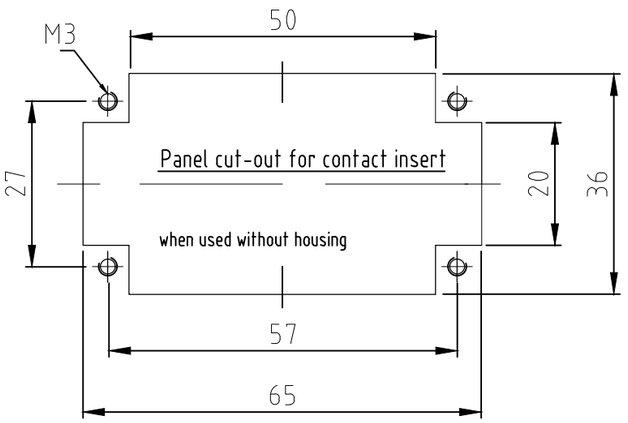

NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 4: SERIES HB; HD;HIP;EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 250 PIECES

OBSOLETE	OBSOLETE	OBSOLETE	OBSOLETE	SUPERSEDED BY T2040103101-000	SUPERSEDED BY T2040104101-000	OBSOLETE						
		4						fixing screw	stainless steel	even		10	M3x10
4	4		4	4	4	4	4	fixing screw	steel	nickel plated	blue	9	M3x10
10								contact spring clamp	brass	gold plated		8	
				10				contact pin	brass	silver plated		7	
			10					contact screw termination	brass	gold plated		6	
	10	10					10	contact screw termination	brass	silber plated		5	
1				1				cover spring version			light grey	4	
					1			cover crimp version			light grey	3	
	1	1	1			1	1	cover screw version			light grey	2	
1	1	1	1	1	1	1	1	pin insert			light grey	1	
0-3	0-2	0-1	9-5	7-1	2-3	1-7	1-1	DESCRIPTION / BENENNUNG	MATERIAL	SURFACE	COLOR	ITEM NO. POS.	NOTES
5	6	5	5	5	5	5	5						
HE.10.STI.SC-AU	HE.10.STI.S.KM	HE.10.STI.S-VA	HE.10.STI.S-AU	HE.10.STI.SC	HE.10.STI.C	HE.10.STI.S-T	HE.10.STI.S	ORDERING TEXT / BESTELLTEXT					

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.

DIMENSIONS: MASSE\NHEITEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ± n. ISO 8015 n. ISO 2768 – mH –E n. DIN 16901 – 1c0
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES / WINKEL ± –

MATERIAL –

FINISH/OBERFLAECHE/FARBE –

DWN 10.02.1999 Gräf
CHK 18.02.1999 Schweiger
APVD –
PRODUCT SPEC PRODUKTSPEZ. —
APPLICATION SPEC VERARBEITUNGSSPEZ. —
WEIGHT GEWICHT

TE Connectivity

NAME
Male insert
HE.10.STI.S/C
–

SIZE	CAGE CODE	DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
A3	00779	C-1103636	—

CUSTOMER DRAWING/KUNDENZEICHNUNG | SCALE MASSSTAB 1:1 | SHEET BLATT 1 OF VON 1 | REV A9