
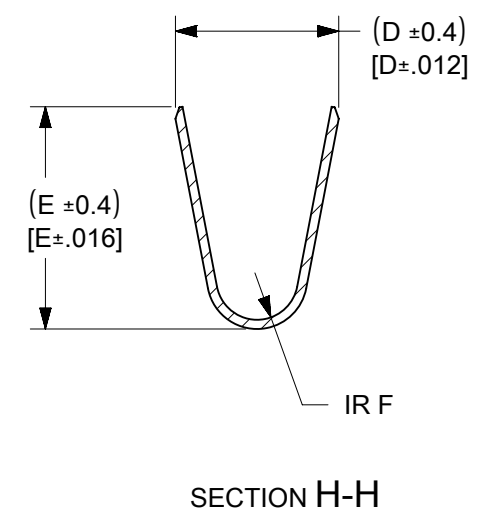
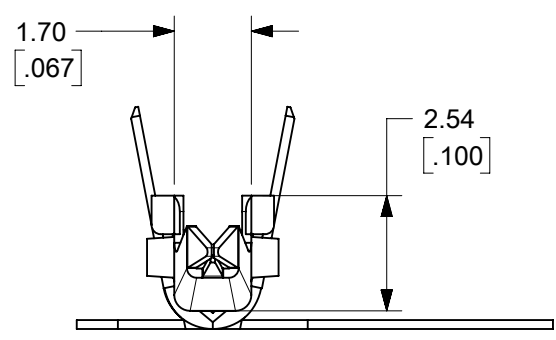


- NOTES:
1. MATERIAL: SEE CHART
  2. FINISH: SEE CHART
  3. PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003
  4. PACKAGING SPECIFICATION: PK-5558-001 FOR CHAIN  
PK-5556-003 FOR LOOSE
  5. MATES WITH TERMINAL: 5556 SERIES.
  6. APPLICABLE HOUSING: 5559, 30068, 42475 SERIES.
  7. THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.
  8. WHEN TERMINALS ARE INSTALLED IN THE HOUSING THE WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
  9. THIS TERMINAL IS DESIGNED FOR SINGLE WIRE CRIMPING.
  10. PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMATIC SPECIFICATION PS-45499-002.
  11. TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.

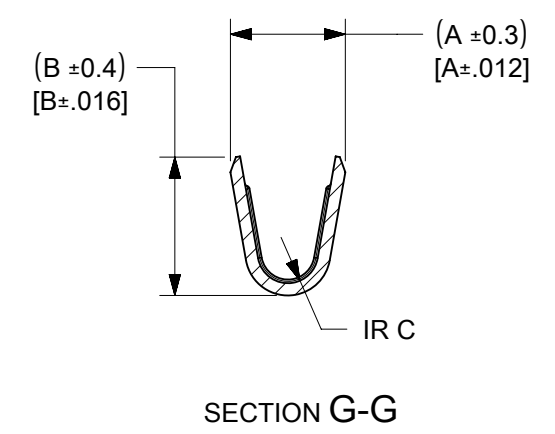

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FUNCTIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:									
FA = 0		mm/inch		NTS		EC NO: 660823 DRWN: VIJAYS4 CHK'D: YXZHENG APPR: YXZHENG INITIAL REVISION: DRWN: H.HIRAMOTO APPR: FSMITH									
FE = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)										2021/04/06		MINI-FIT JR OVERALL TIN MALE CRIMP TERMINAL	
FD = 0		4 PLACES ±		MM INCH								2021/04/14			
DIVISIONAL SYMBOLS		3 PLACES ±		± 0.01								2021/04/14		PRODUCT CUSTOMER DRAWING	
		2 PLACES ±		± 0.25 ± 0.01		1991/03/12		DOCUMENT NUMBER		DOC TYPE   DOC PART   REVISION					
		1 PLACE ±		±		2010/04/09		SD-5558XXXX		PSD   001   L2					
		0 PLACES ±		±				MATERIAL NUMBER		CUSTOMER					
		ANGULAR TOL ±		3.0 °				SEE SHEET 2		GENERAL MARKET					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		SHEET NUMBER					
				B-SIZE		5558		1 OF 2							

PLATING		MATERIAL	F	E	D	C	B	A	INS.RANGE	WIRE AWG RANGE		EDP NO.	ENG. NO.	FORM
REFLOWED MATTE TIN 0.00090/(.000035) MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE, THICKNESS AS APPLIED PRIOR TO REFLOW)	PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX	16	N/A	39-00-0084	5558 PBT3L	LOOSE	
										20+20	39-00-0083	5558 PBT3	CHAIN	
										20+22				
		(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9 - 1.8) .035 - .071	22-28	N/A	39-00-0068	5558 PBT2L	LOOSE	
										N/A	39-00-0067	5558 PBT2	CHAIN	
		(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3 - 3.1) .051 - .122	18-24	N/A	39-00-0062	5558 PBTL	LOOSE	
22+22	39-00-0061									5558 PBT	CHAIN			
REFLOWED MATTE TIN 0.00090/(.000035) MIN OVER COPPER 0.00050/(.000020) MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE, THICKNESS AS APPLIED PRIOR TO REFLOW)	BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX	16	N/A	39-00-0082	5558 T3L	LOOSE	
										20+20	39-00-0081	5558 T3	CHAIN	
										20+22				
		(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9 - 1.8) .035 - .071	22-28	N/A	39-00-0049	5558 T2L	LOOSE	
										N/A	39-00-0048	5558 T2	CHAIN	
		(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3 - 3.1) .051 - .122	18-24	N/A	39-00-0041	5558 TL	LOOSE	
22+22	39-00-0040									5558 T	CHAIN			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
FUNCTIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:					
FA = 0		mm/inch		NTS		EC NO: 660823 DRWN: VIJAYS4 CHK'D: YXZHENG APPR: YXZHENG INITIAL REVISION: DRWN: H.HIRAMOTO APPR: FSMITH					
FE = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)									
FD = 0		MM		INCH							
DIVISIONAL SYMBOLS		4 PLACES ±		±							
		3 PLACES ±		± 0.01							
		2 PLACES ±		± 0.25 ± 0.01							
		1 PLACE ±		±							
		0 PLACES ±		±							
		ANGULAR TOL ±		± 3.0°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER			
		B-SIZE		5558		1991/03/12		SD-5558XXXX			
		SEE TABLE		GENERAL MARKET		2010/04/09		PSD		001 L2	
								MATERIAL NUMBER		SHEET NUMBER	
								CUSTOMER		2 OF 2	

10 9 8 7 6 5 4 3 2 1

REFLOWED MATTE TIN 0.00090/(.000035)  
MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE,  
THICKNESS AS APPLIED PRIOR TO REFLOW)

PHOSPHOR  
BRONZE

(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16
(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28
(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	#18-24

39-00-0084	5558 PBT3L	LOOSE
↑ -0083	↑ PBT3	CHAIN
-0068	PBT2L	LOOSE
-0067	PBT2	CHAIN
-0062	PBTL	LOOSE
-0061	PBT	CHAIN

REFLOWED MATTE TIN 0.00090/(.000035)  
MIN OVER COPPER 0.00050/(.000020)  
MIN. (PREPLATE) (FINISH IS BRIGHT IN APPEARANCE,  
THICKNESS AS APPLIED PRIOR TO REFLOW)

BRASS

(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	∅ (3.1) .122 MAX.	# 16
(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	∅ (0.9-1.8) .035-.071	#22-28
(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	∅ (1.3-3.1) .051-.122	#18-24

↑ -0082	T3L	LOOSE
-0081	T3	CHAIN
-0049	T2L	LOOSE
-0048	T2	CHAIN
↓ -0041	↓ TL	LOOSE
39-00-0040	5558 T	CHAIN

PLATING MATERIAL F E D C B A INS. RANGE WIRE RANGE EDP NO. ENG. NO. FORM

SEE SHEET 1  
EC NO: UCP2017-1893  
DRAWN: GSLAFTER 2017/02/28  
CHKD: JBELL 2017/03/14  
APPR: FSMITH 2017/07/31

QUALITY SYMBOLS  
▽=0  
▽=0  
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± .25	± .010
1 PLACE	± .25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE MM/IN

DRAWN BY	DATE
H.HIRAMOTO	1991/03/12
CHECKED BY	DATE
S.KUNISHI	1998/07/07
APPROVED BY	DATE
FSMITH	2010/04/09

MATERIAL NO. SEE CHART

SCALE DESIGN UNITS METRIC

THIRD ANGLE PROJECTION

MINI-FIT JR  
OVERALL TIN  
MALE CRIMP TERMINAL

**molex** MOLEX INCORPORATED

DOCUMENT NO. SD-5558\*\*\*\* SHEET NO. 2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION